
FED. SUP CLASS
4730

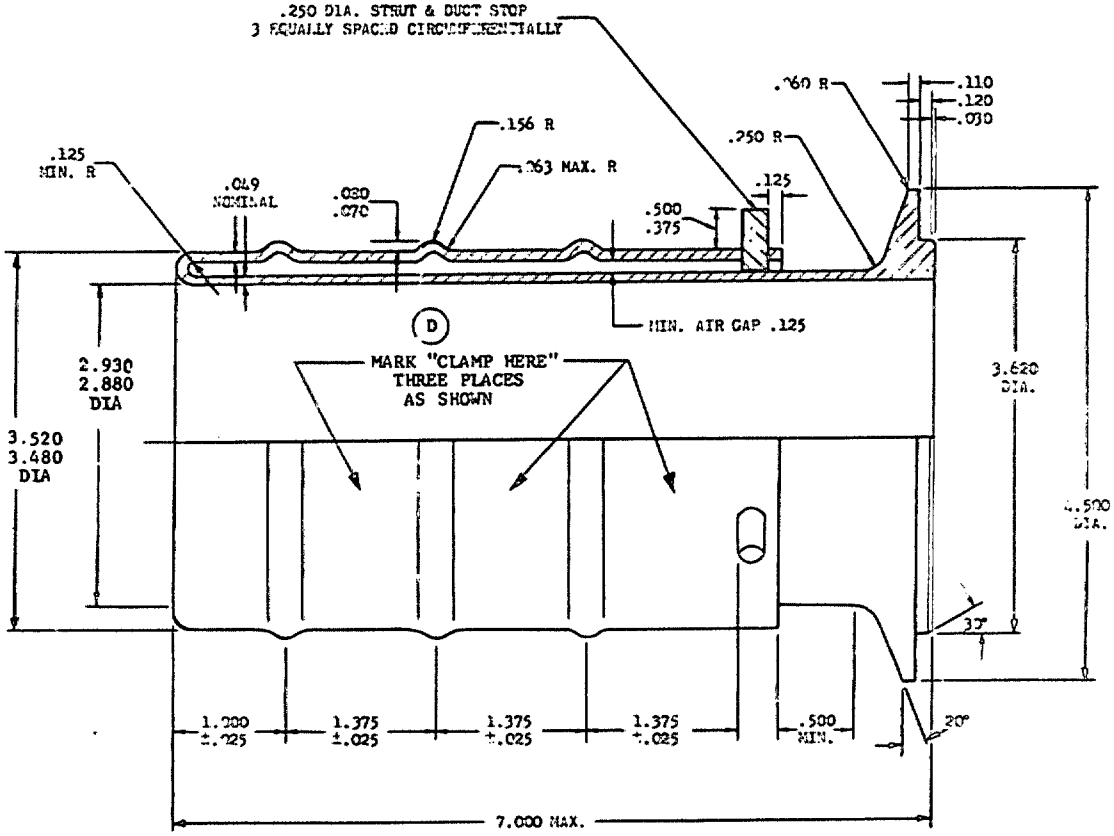

NOTES

1. MATERIAL: CORROSION RESISTANT STEEL (18-8) CMPSN Cb - To AISI TYPE NO. 347 OR CMPSN Ti AISI TYPE NO. 321, SPEC MIL-S-6721. PASSIVATE AFTER MACHINING.
2. SURFACE ROUGHNESS, ANSI B46.1, MAXIMUM ROUGHNESS 125 MICROINCHES, ALL EXPOSED SURFACES.
3. REMOVE BURRS AND BREAK SHARP EDGES .003-.015.
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±0° 30'.
5. UNLESS OTHERWISE SPECIFIED, ALL MACHINED FILLETS TO BE .020 RAD.
6. POROSITY TEST: FINISHED FITTING SHALL NOT LEAK WHEN SUBJECTED TO 100 PSI AIR PRESSURE AND SUBMERGED IN WATER FOR 3 MINUTES.
7. (D) FLANGE OF FITTING MATES WITH ONE END OF MIL-C-25531 COUPLING.

(D) DENOTES CHANGES

APPROVED 16 APR 1962 REVISED (B) 15 DEC 1976 (C) 9 FEB 79 (D) 4 APR 83

P.A. NAVY - AS Other Cust ARMY - AV USAF - 99	TITLE FITTING, PNEUMATIC STARTER DUCT-FLANGED (MALE)	MILITARY STANDARD MS17833
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 4730-0492

USER SYMBOLS:

REVIEWER SYMBOLS: USAF - 11 DLA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.