
FED. SUP CLASS
4820
(B)

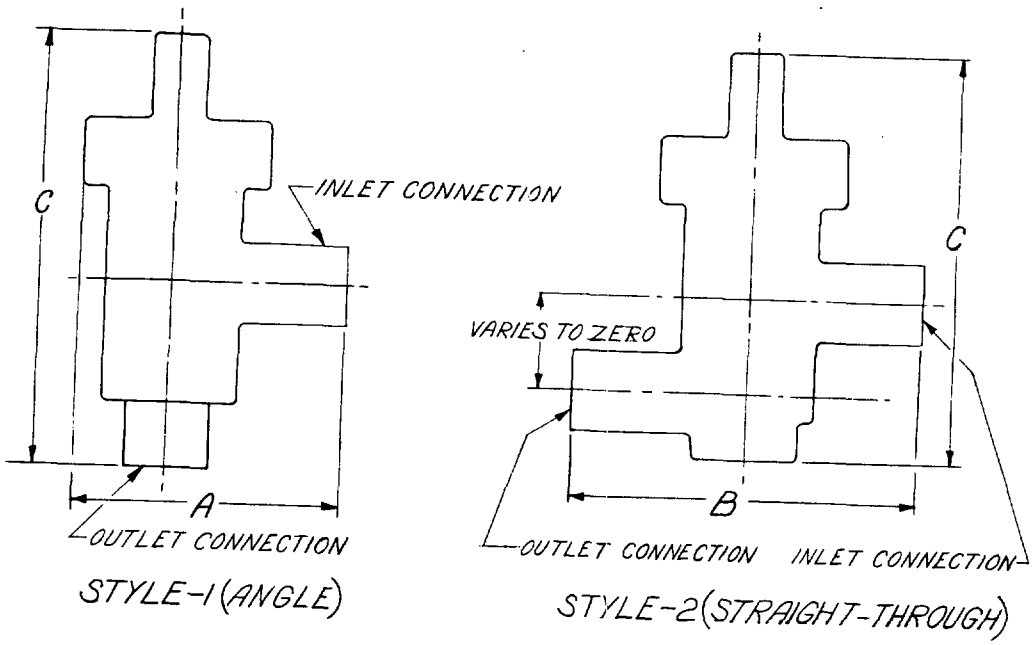

(B) DASH NO.	(B) STYLE	MIN CAPACITIES (BTU/HR) EVAPORATOR TEMPERATURE -10F 1 P.S.I. MAX PRESSURE DROP	+20F 2 P.S.I. MAX PRESSURE DROP	INLET AND OUTLET CONNECTIONS (INCHES)	MAXIMUM DIMENSIONS (INCHES) A	B	C
-7A	1	6,000	12,000	7/8	6 1/2	–	9 1/2
-7S	2	6,000	12,000	7/8	–	9	9 1/2
-8A	1	9,000	18,000	7/8	7	–	12
-8S	2	9,000	18,000	7/8	–	9 1/2	12
-9A	1	12,000	24,000	1 1/8	7	–	12
-9S	2	12,000	24,000	1 1/8	–	9 1/2	12

NOTES

1. FOR USE WITH DICHLORODIFLUOROMETHANE (CCl_2F_2) R-12 REFRIGERANT.
2. ALL CONNECTIONS SHALL BE FEMALE SOLDER TYPE CONFORMING TO MS 35925.
3. CAPACITIES BASED ON MAXIMUM PRESSURE DIFFERENTIAL OF 15 POUNDS BETWEEN VALVE SETTING AND NORMAL OPERATING SUCTION PRESSURE AND 100 F. VAPOR FREE ENTERING LIQUID TEMPERATURE.
4. (B) DELETED.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID OR REQUEST FOR PROPOSAL.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. (B) PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 17846-7A-NUMERAL INDICATES SIZE-LETTER INDICATES STYLE, I.E., "A" EQUALS ANGLE VALVE, "S" EQUALS STRAIGHT-THROUGH VALVE.

APPROVED 21 MAY 1962 REVISED (A) 9 APRIL 1965 (B) 16 MAY 1975

REVIEW ACTIVITIES
Army - MD
DSA - GS
USER ACTIVITY
Army - CE
Navy - MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Army-GL Other Cust Navy-YD USAF-82	TITLE VALVES, REGULATING, FLUID PRESSURE, CRANKCASE, REFRIGERANT-12	MILITARY STANDARD
PROCUREMENT SPECIFICATION MIL-V-23300	SUPERSEDES:	MS 17846
		SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.