This military standard is approved for use by Engineering and Technical Support Division (AFLC/LOIE) Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense

Review activities
AF - 11, 15, 99

User activities

DD FORM 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Procurement Specification: MIL-C-27599(USAF)

PA 85 Ⓔ

Other Cust

International interest

SUPERSEDES MS20028


TITLE
CONNECTOR, PLUG, ELECTRICAL, SOLDER TYPE, STRAIGHT, BAYONET COUPLING

MILITARY STANDARD
MS 20028 (USAF)

PAGE 1 OF 1

5935-F046

Ⓔ Denotes Changes

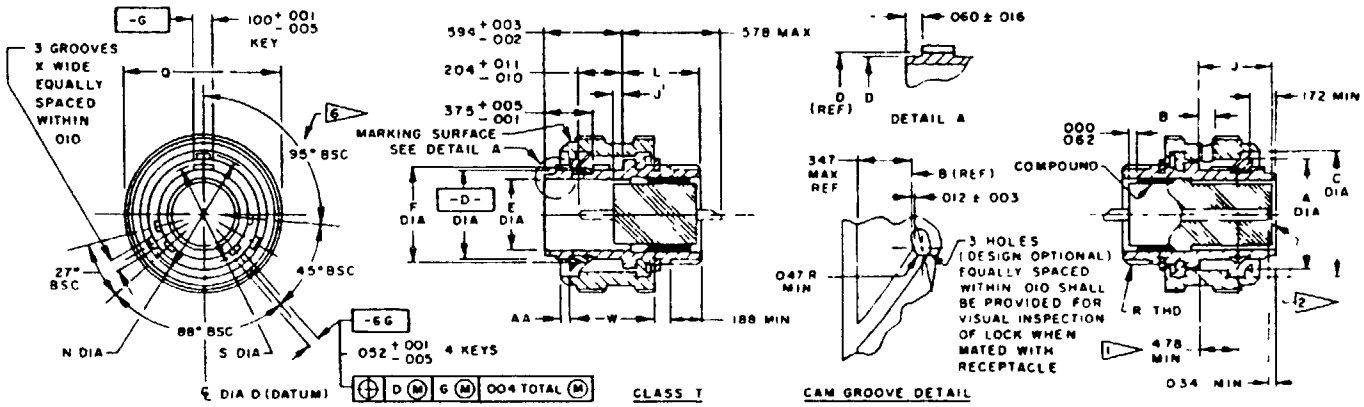


SHELL SIZE	A DIA +.005 -.001	C DIA +.005 -.001	D DIA +.001 -.005	D' DIA MIN	E DIA ±.003	F DIA MIN	J ±.005 SOCKET INSERT	J' ±.005 PIN INSERT	L MAX	N DIA +.005 -.006	Q DIA MAX	S DIA +.001 -.010	B ±.020	W +.016 -.006	X +.016 -.001	AA +.005 -.006	R THD CLASS 2A (PLATED) UNEF
9	.580	.684	.437	.417	.315	.447				.674	.859	.482		.693			7/16 28
11	.712	.832	.565	.545	.433	.575				.822	.984	.610		.682			9/16 24
13	.861	.981	.677	.657	.547	.692				.972	1.156	.759					11/16 24
15	.985	1.108	.802	.782	.672	.817			.547	1.097	1.281	.884			.090	.068	13/16 20
17	1.110	1.230	.927	.907	.797	.942	.574	.018		1.222	1.406	1.009	.113				15/16 2
19	1.217	1.347	1.032	1.012	.886	1.047				1.329	1.516	1.114		.693			1 1/16 18
21	1.342	1.462	1.157	1.137	1.011	1.172				1.454	1.641	1.239					1 3/16 18
23	1.467	1.587	1.282	1.262	1.136	1.297				1.579	1.766	1.364					1 5/16 18
25	1.592	1.712	1.407	1.387	1.260	1.442			.609	1.704	1.891	1.489	.152	.794	.137	.047	1 7/16 18

NOTES
1. The point at which a gage pin, having the same basic diameter as the mating contact and a square face, touches socket contact spring
2. Insert front surface shall be flat within .005 T I R
3. Diameter D with respect to diameter S shall be concentric at MMC
4. Diameters A and N shall be concentric within .008 T I R
5. Dimensions are in inches
6. Normal keyway position. For other keyway positions see sheet 2 figure 2 of procurement specification
Ⓔ 7. Finish A - Bright cadmium (see MIL-C-27599)
B - Olive drab (see MIL-C-27599)
F - Electroless nickel in accordance with MIL-C-26074, class 3 or 4, grade B, finish dull
Ⓔ 8. For insert arrangements see MIL-STD-1560

EXAMPLE OF PART NUMBER

Ⓔ

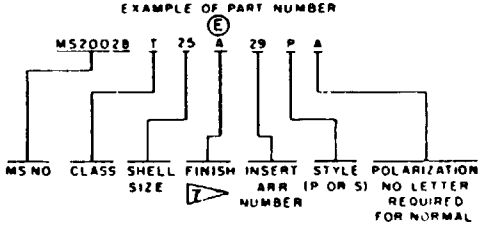

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID

APPROVED 22 Jan 65 REVISED Ⓔ 16 AUG 1976

FED SUP CLASS 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:21Z
Check the source to verify that this is the current version before use.