
FED. SUP CLASS
6240

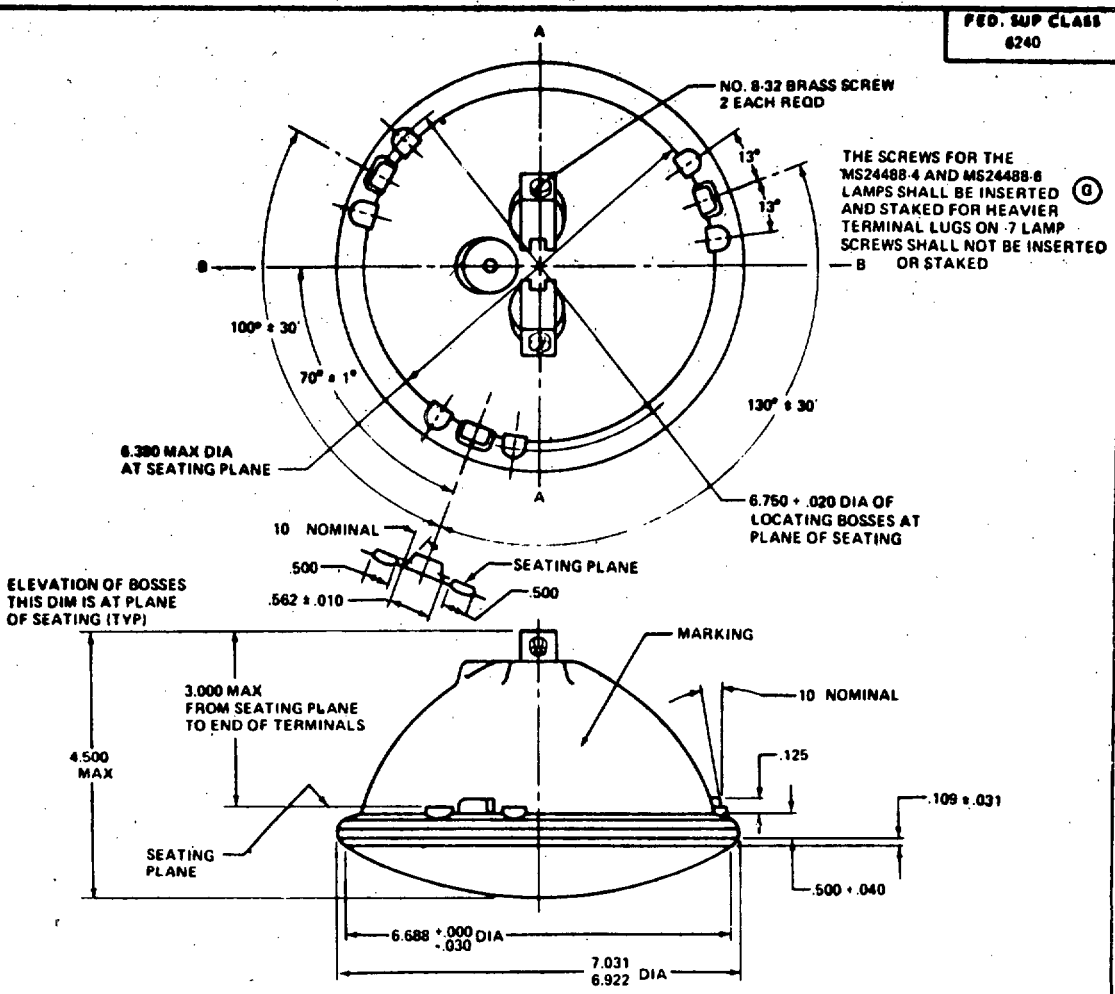

DASH NO.	INITIAL WATTS	RATED AMPERES	RATED AVERAGE LABORATORY LIFE (HOURS) (BURNED BASE DOWN)	MINIMUM BEAM DIMENSIONS THRU OPTICAL AXIS: INTENSITY CANDELAS	HORIZ. SPREAD (PLANE A-A)	VERT. SPREAD (PLANE B-B)	MAXIMUM DEVIATION OF BEAM AXIS FROM MECHANICAL AXIS	MINIMUM PEAK INTENSITY (CANDELAS)	FILAMENT	COVER GLASS
~~-1 (a)~~	~~200 ± 10~~	~~6.6~~	~~300~~	80,000 20,000	6 10°	5 8°	± 1	150,000	CC-6(7.2 X3.9 mm)	~~LIGHT~~
~~-3 (b)~~	~~499 ± 30~~	~~20~~	~~500~~	~~300,000~~	~~6°~~	~~5°~~	± 1	~~300,000~~	~~CC-6~~	~~LIGHT~~
~~-4 (c)~~	~~45 ± 4~~	~~6.6~~	~~1,000~~	~~6,000~~	~~7.5°~~	~~8°~~	± 1	~~5,000~~	~~C-8~~	~~PRISMATIC~~
-4	45 ± 4	6.6	1,000	6,500	7.5°	7.5°	± 1	50,000	C-8	LT STIPPLE
~~-5 (d)~~	~~502 ± 30~~	~~30~~	~~400~~	~~200,000~~	~~6°~~	~~6°~~	± 1	~~300,000~~	~~CC-6~~	~~LT STIPPLE~~
-6	200 ± 16	6.6	1,000	80,000 20,000	5° 11°	4° 7°	± 1	170,000	CC-6	CLEAR
-7	499 ± 30	20	500	200,000	6°	5°	± 1	300,000	CC-6	CLEAR

(a) MS24488-1 INACTIVE FOR NEW DESIGN AFTER 1 MARCH 1969. USE MS24488-6.
(b) MS24488-2 INACTIVE FOR NEW DESIGN AFTER 19 JUNE 1964.
(c) MS24488-3 INACTIVE FOR NEW DESIGN AFTER 9 MAY 1962.
(G) (d) MS24488-5 INACTIVE FOR DESIGN AFTER 20 AUG 1971.

1. MINIMUM MARKING: WATTS, AMPERES, MS PART NO., AND MFRS NAME, ABREVIATION, OR TRADEMARK.
2. DIMENSION IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS ± .016.
3. LIFE TOLERANCE SHALL BE IN ACCORDANCE WITH TABLE I, SPECIFICATION W.L. 101.
   1 AND 4 INTENSITY MAINTENANCE AT RATED LIFE: SPECIFIED BEAM DIMENSIONS SHALL BE EXCEEDED AT 80% OF SPECIFIED INTENSITY.
   (G) 6 AND -7 INTENSITY MAINTENANCE AT RATED LIFE: SPECIFIED BEAM DIMENSIONS SHALL BE EXCEEDED AT 90% OF SPECIFIED INTENSITY.
   -6 AND -7 FILAMENT IS IN A QUARTZ LAMP WHICH IS SEALED IN A PAR 56 BULB.
   FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
   REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. USAF 82 Other Cust NAVY - AS	TITLE LAMP, INCANDESCENT, PAR-56, SCREW TERMINAL, AIRPORT LIGHTING	MILITARY STANDARD MS24488
PROCUREMENT SPECIFICATION MIL-L-6160	SUPERSEDES:	SHEET 1 OF 1

APPROVED 17 Oct 57 — REVISED (A) 26 Aug 58 (B) 5 Jan 60 (C) 9 May 62 (D) 19 Jun 64 (E) 18 Feb 65 (F) 1 Mar 69 (G) 20 Aug 71

NAVY - AS
USAF - 82

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:55Z
Check the source to verify that this is the current version before use.