INCH-POUND
MS25098J
26 June 1995
SUPERSEDING
MS25098H
31 December 1986


MILITARY SPECIFICATION SHEET

SWITCH, TOGGLE, ONE POLE, SEALED TOGGLE

INACTIVE FOR NEW DESIGN AFTER 16 SEPTEMBER 1969

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-83731.

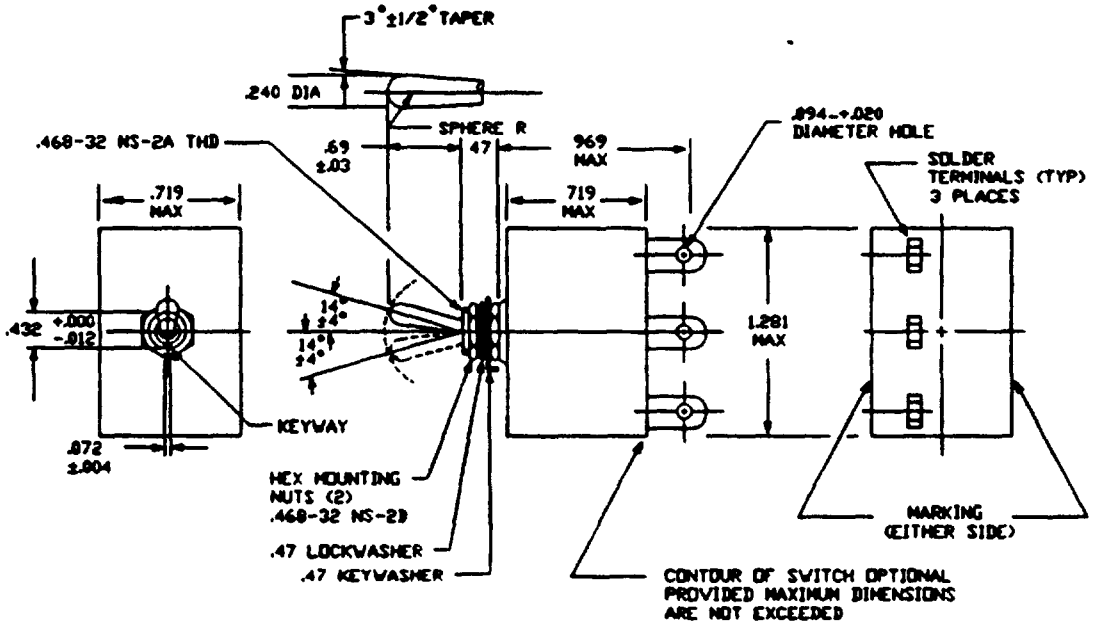

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.004	0.10	.03	0.8	.240	6.10	.47	11.9	.969	24.61
.012	0.30	.072	1.83	.432	10.97	.69	17.5	1.281	32.54
.020	0.51	.094	2.39	.468	11.89	.719	18.26		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.020 (0.51 mm) on two place decimals and ±.005 (0.13 mm) on three place decimals.
4. For hardware detail specifications see appendix of MIL-S-83731.
5. Dome on top of the mounting bushing is permissible, not to exceed .09 (2.3 mm).

FIGURE 1. Dimension and configurations.

(J) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
REQUIREMENTS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

Design and construction: See figure 1.

Switching characteristics: See table I. Direction of the movement of the switch mechanism is the same as that of the toggle lever.

Weight: .8 ounce maximum.

Dielectric withstanding voltage: Sea level only.

Toggle seal test: Applicable.

Electrical endurance: 10,000 cycles, at sea level only.

Mechanical endurance:

Maintained circuits: 20,000 cycles.
Momentary circuits: 10,000 cycles.

Resistive loads:
125 V dc: 3 amperes.
115 V ac, 60 Hz: 3 amperes.

Inductive loads:
125 V dc: 1.5 amperes
115 V ac, 60 Hz: 1.5 amperes

(J) Group B inspection: Not applicable.

Part or Identifying Number (PIN):

Example:

MS25098- 22

Dash number (see table I)

PIN MS25098-22 identifies a switch with a circuit configuration of OFF in the down position (keying side), NONE in center position, and , ON in the up position.

TABLE I. Switching characteristics.

MS part no. MS25098-	Circuit with toggle lever in			Former MS part no.	Former Jan type designation
	Down position keying side	Center position	Up position		
22	Off	None	On	MS25098-1	ST12A
23	On	None	On	MS25098-4	ST12D
26	Mom On	None	On	None	ST12F
29	Mom Off	None	On	MS25098-2	ST12B
30	Mom On	None	Off	MS25098-3	ST12C

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

J CONCLUDING MATERIAL

Custodian:
Air Force - 85
Navy - AS
Army - ER

Review activities:
Navy - EC
Air Force - 99
Army - AV

Preparing activity:
DLA - ES

(Project 5930-1606)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.