
INCH-POUND

Form approved
OMB No. 0704-0188

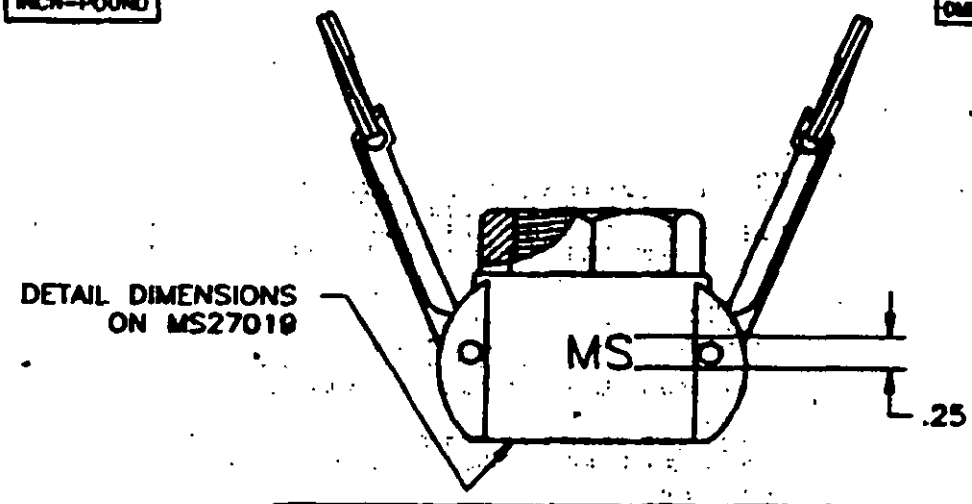

DASH NUMBER	CLASS NUMBER		NOM. SIZE INCHES	GASKET REQD
	CLASS 1	CLASS 2		
-1	X		1/2	MS27030-1
-2		X		
-3	X		3/4	MS27030-2
-4		X		
-5	X		1	MS27030-3
-6		X		
-7	X		1-1/4	MS27030-4
-8		X		
-9	X		1-1/2	MS27030-5
-10		X		
-11	X		2	MS27030-6
-12		X		
-13	X		2-1/2	MS27030-7
-14		X		
-15	X		3	MS27030-8
-16		X		
-17	X		4	MS27030-9
-18		X		
-19	X		6	MS27030-10
-20		X		

(E) DENOTES CHANGES

PREPARING ACTIVITY: ARMY-ME CUSTODIANS: ARMY-ME ARMY-YD AIR FORCE-99 DLA- REVIEW: ARMY-AV/GL USAF-82 DLA-CS USER: ARMY-SM,AT ARMY-MC,EH PROJECT NUMBER 4730-0139	MILITARY SPECIFICATION SHEET TITLE: COUPLING HALF, QUICK DISCONNECT, CAM-LOCKING TYPE, FEMALE, INTERNAL PIPE THREAD, TYPE IX	SPECIFICATION SHEET NUMBER MS 27024E 30 DEC 1983 SUPERSEDING MS27024D 4 OCT 1985 AMSC- N/A FSC 4730
DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.		PAGE 1 OF 2

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-27487

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THE FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.

INCH-POUND

Form approved
OMB No. 0704-0188

NOTES:

(E) 1. MATERIAL:
   A. BODY:
      CLASS 1. ALUMINUM ALLOYS UNS A03560-T6, A07120-T5 OR A07130-T5 PER ASTM B26.
      CLASS 2. COPPER ALLOYS UNS C83600, C83800, C84400, C90500 AND C92200, PER ASTM B584, OR ALLOY C37700 PER ASTM B283.
   B. CAM ARMS:
      COPPER ALLOYS UNS C36500, C37700, C48400, C48200 OR C48500 PER ASTM B124. OPTIONAL MATERIALS CRES UNS S30400 PER ASTM A314. POWDERED METAL PER MPIF (METAL POWDER INDUSTRIES FEDERATION) STD 35. GALVANIZED.
   C. CAM PINS:
      CRES. UNS S30323 OR S30300 PER ASTM A582 OR QQ-S-763. CRES. CLASS UNS S30430, UNS S31600, CONDITION A.
   D. RINGS, WIRE:
      CRES UNS S30400, OPTIONAL: SPRING STEEL, TYPE OPTIONAL, ZINC COATED.

(E) 2. FINISH:
   A. BODY:
      CLASS 1. ALUMINUM-MIL-A-8625, ANODIC COATING, TYPE II, CLASS 1.
      CLASS 2. BRONZE OR BRASS-PLAIN (NO FINISH REQUIRED).

3. THREADS: NATIONAL TAPERED PIPE THREAD PER ANSI/ASME B1.20.1.

(E) 4. HYDROSTATIC TEST PRESSURE: 1/2 THROUGH 4 INCH-300 P.S.I.G.; 6 INCH-200 P.S.I.G.

5. WORKING PRESSURE: UP TO 4 INCH-150 P.S.I.; FOR 6 INCH-100 P.S.I.

(E) 6. GASKET AND WIRE RINGS SHALL BE INCLUDED WITH EACH COUPLING HALF.

7. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER PLUS THE DASH NUMBER, EXAMPLE: MS27024-1.

8. CERTAIN PROVISIONS (DIMENSIONS) OF THIS DOCUMENT ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT. PRIOR TO REVISION, OR CANCELLATION OF THIS DOCUMENT, THE PREPARING ACTIVITY SHALL TAKE APPROPRIATE ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS.

(E) DENOTES CHANGES

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-AV NAVY-YD AIR FORCE-99 DLA- REVIEW: ARMY-AV, DLA, USAF-82 DLA-CS USER: ARMY-SMAT NAVY-MC,SH PROJECT NUMBER: 4730-0126	MILITARY SPECIFICATION SHEET TITLE: COUPLING HALF, QUICK DISCONNECT, CAM-LOCKING TYPE, FEMALE, INTERNAL PIPE THREAD, TYPE II	SPECIFICATION SHEET NUMBER MS 27024E 20 DEC 1983 SUPERSEDING MS27024D 4 OCT 1985 AMSC- N/A FSC 4730
DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.		PAGE 2 OF 2

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-27487

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THE FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.