
FED. SUP CLASS
6210

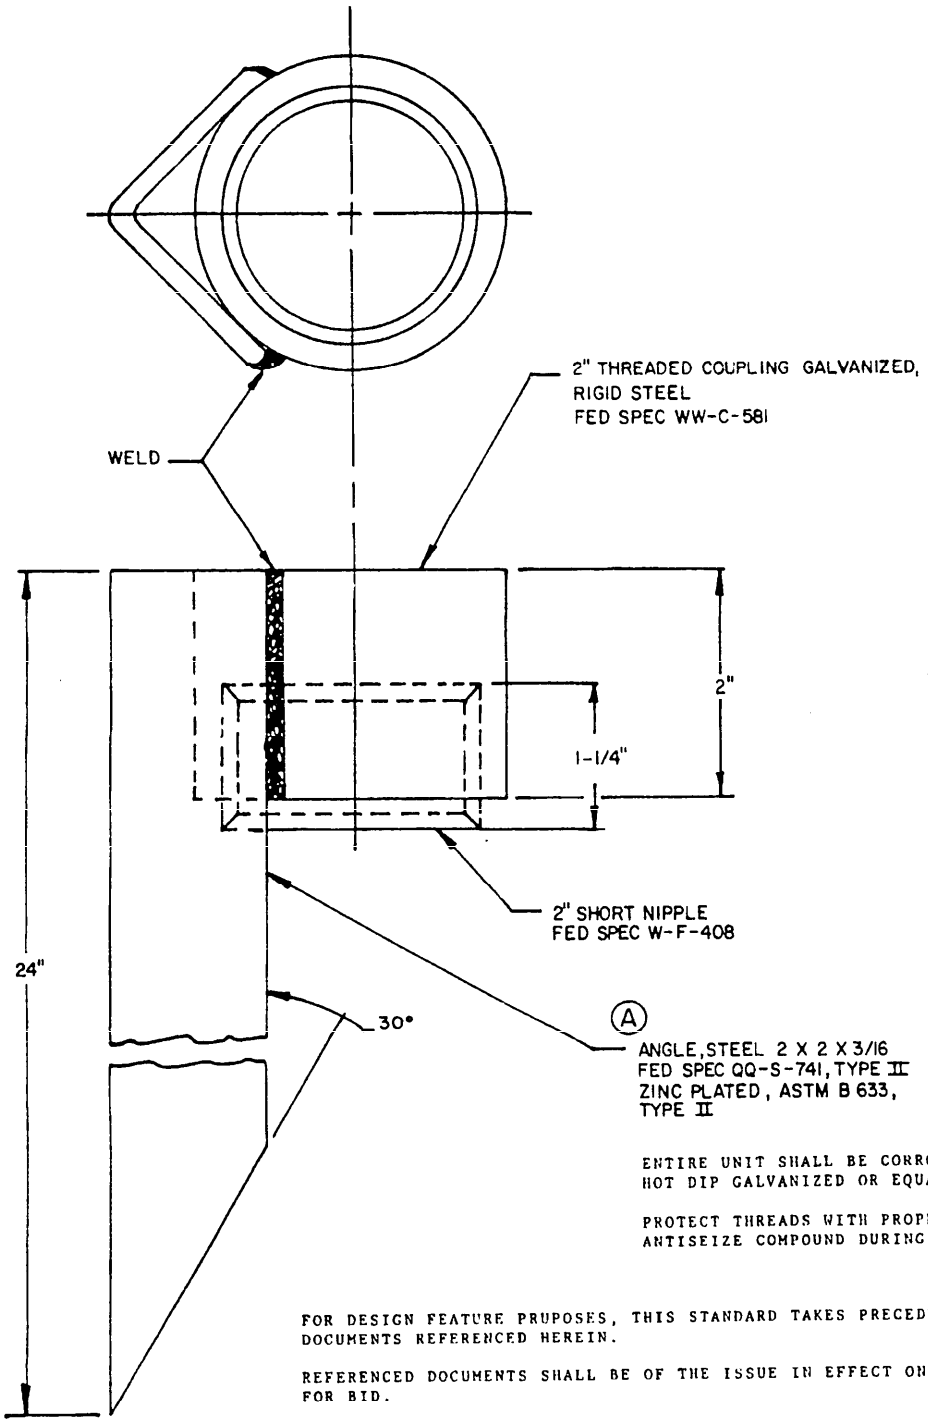

ENTIRE UNIT SHALL BE CORROSION PROTECTED BY HOT DIP GALVANIZED OR EQUAL, AFTER FABRICATION.

PROTECT THREADS WITH PROPER LUBRICANTS OR ANTISEIZE COMPOUND DURING GALVANIZING.

FOR DESIGN FEATURE PRUPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

DIMENSIONS IN INCHES:
UNLESS OTHERWISE SPECIFIED, TOLERANCE: 1/32"

APPROVED 1 JUL. 1963 REVISED (A) 30 Apr 84

USER ACTIVITIES:

REVIEWER ACTIVITIES DCS-GS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A. AF-82 Other Cust AF-99 (A)	INTERNATIONAL INTEREST	TITLE: STAKE MOUNTING, AIRPORT MARKER LIGHT	MILITARY STANDARD MS 27280 (USAF)
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

6210-F594

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:20Z
Check the source to verify that this is the current version before use.

containers, containing assemblies,