
FED. SUP CLASS.
4730

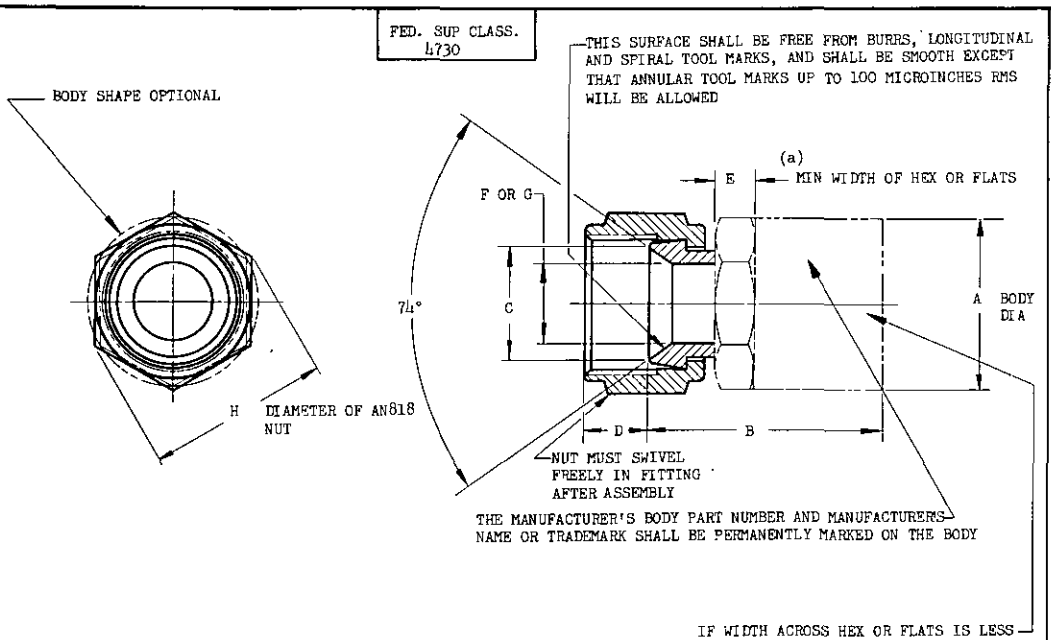

AN PART NO.	HOSE ID REF	TUBING OD	(c) NUT	A MAX DIA	B MAX	(b) C DIA		D		E MIN	F MIN DIA	(d) G +.005 -.000 DIA	WT MAX LB	H REF
MS28740-3	1/8	3/16	AN818-3	.687	1.375	.245		.337	±.016	.188	.123	.123	.045	.505
MS28740-4	3/16	1/4	AN818-4	.781	1.750	.295		.375		.188	.157	.170	.072	.649
MS28740-5	1/4	5/16	AN818-5	.875	1.781	.355		.375		.188	.219	.232	.087	.721
MS28740-6	5/16	3/8	AN818-6	1.000	1.906	.435	+.005 -.000	.375		.250	.281	.295	.109	.794
MS28740-8	13/32	1/2	AN818-8D	1.156	2.234	.570	-	.438		.250	.383	.390	.160	1.010
MS28740-10	1/2	5/8	AN818-10D	1.375	2.406	.680		.515	±.030	.312	.469	.484	.176	1.155
MS28740-12	5/8	3/4	AN818-12D	1.500	2.656	.850		.562		.375	.578	.608	.243	1.443
MS28740-16	7/8	1	AN818-16D	1.625	2.395	1.103		.620		.375	.781	-	.306	1.732
MS28740-20	1- 1/8	1-1/4	AN818-20D	2.062	2.705	1.410	±.005	.620		.500	1.031	-	.573	2.309
MS28740-24	1- 3/8	1-1/2	AN818-24D	2.312	2.562	1.625		.765		.500	1.276	-	.535	2.598
MS28740-32	1-13/16	2	AN818-32D	2.812	3.094	2.240		.937		.625	1.745	-	.868	3.320

(a) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.
(b) DIMENSION C OF CONICAL SEAT TO BE CONCENTRIC WITH OD OF NIPPLE WITHIN .005 FULL INDICATOR READING.
(c) A NON-STANDARD SWIVEL NUT MAY BE USED PROVIDED THE HEX DIMENSION AND THE THREAD DIMENSIONS ARE IN ACCORDANCE WITH AN818 AND PROVIDED THE NUT CANNOT BE REMOVED FROM THE ASSEMBLY.
(d) DIMENSION G SHALL BE APPLICABLE TO THOSE END FITTINGS WHICH REQUIRE A MANDREL TO ASSEMBLE END FITTING TO THE HOSE.

THE MS PART NUMBER SHALL BE MARKED ON A REMOVABLE TAG SECURELY ATTACHED TO THE END FITTING ASSEMBLY.

EXAMPLES OF PART NUMBERS: MS28740-3, -4, -5 AND -6 SHALL BE STEEL NIPPLE AND NUT AND ALUMINUM ALLOY BODY.
MS28740-8 AND ABOVE MAY BE ALUMINUM ALLOY OR STEEL NIPPLE AND ALUMINUM ALLOY NUT AND BODY.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

THESE FITTINGS ARE FOR USE WITH MIL-H-5511 HOSE AS SHOWN ON DRAWING MS28741.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGLES ±1°.

FOR ACCEPTABLE PRODUCTS SEE QUALIFIED PRODUCTS LIST NO. 5070.

THE AIRPLANE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATION.

FOR OPERATING PRESSURES SEE DRAWING AND10340.

(D) CANCELLED AFTER 6 FEB 1978 USE MS24587

(D) DENOTES CHANGES

APPROVED 24 Sep 51 — REVISED (A) 15 Aug 52 (B) 16 Jun 53 (C) 1 Jul 54 (D) 6 FEB 1978

CUSTODIAN Navy - BuAer, Air Force, Army - T	MILITARY STANDARD	MS28740
PROCUREMENT SPECIFICATION MIL-F-5070	FITTING END - HYDRAULIC, PNEUMATIC, FUEL AND OIL HOSE	SHEET 1 OF 1

SUPERSEDES DRAWINGS AN782 AND AN792

51 26178

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

☆GOVERNMENT PRINTING OFFICE: 1978—703-122/1018

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.