
FED. SUP CLASS
4820

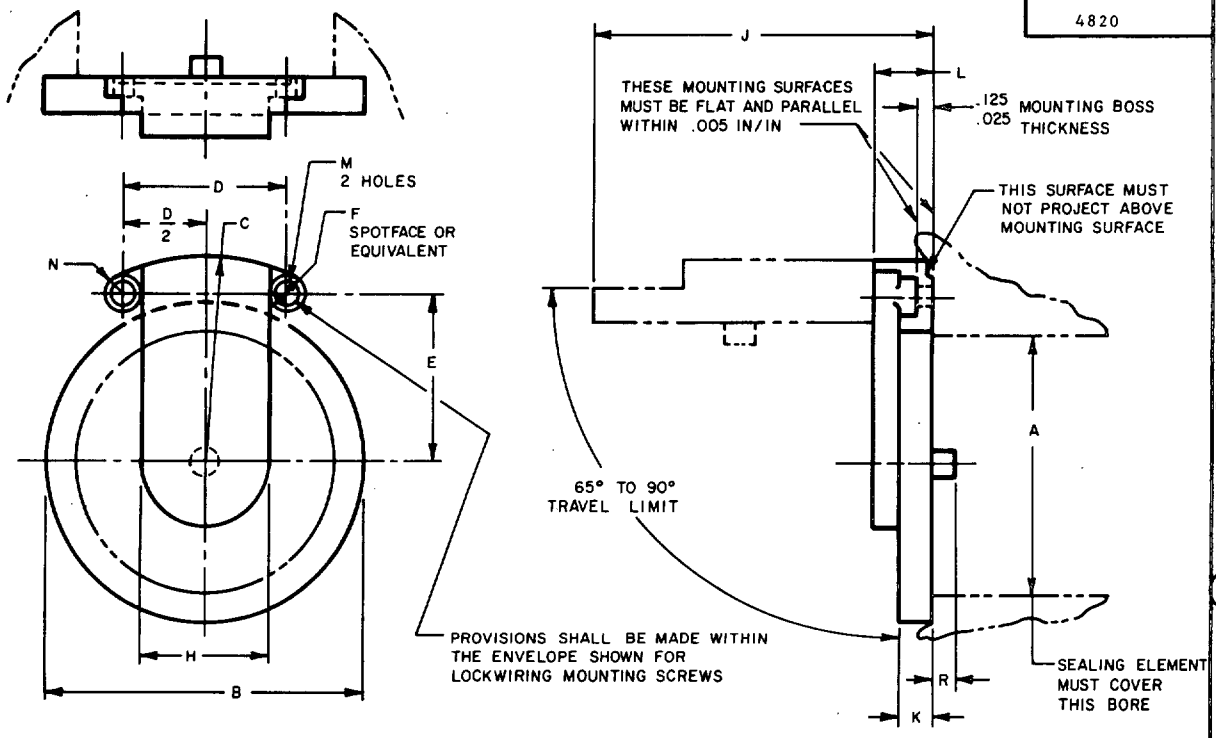

DASH NO.	A DIA.	B MAX. DIA.	C MAX. RAD.	D	D/2	E	F	H (REF)	J MAX	K MAX	L MAX	M DIA	N MIN RAD	R MAX	RATED FLOW GPM	TUBING SIZE IN.
-12A	.561	.933	.767	.860	.4300	.440	.304	.550	1.086	.182	.282	.1495	.152	.156	15	.75
-16	.792	1.183	.916	1.110	.5550	.525		.806	1.337	.198	.335				30	1.
-20	1.024	1.527	1.097	1.248	.6240	.710		.940	1.704	.226	.373				50	1.25
-24	1.248	1.777	1.200	1.240	.6200	.845		.930	1.968	.236	.382				70	1.50
-28	1.483	2.090	1.350			1.025		.930	2.324	.249	.395			.219	100	1.75
-32	1.719	2.277	1.451	1.382	.6910	1.100		1.078	2.511	.267	.470				130	2.
-40	2.203	2.809	1.809	1.406	.7030	1.500		1.102	3.160	.287	.500				215	2.50
-48	2.703	3.309	2.046	1.656	.8280	1.703		1.352	3.735	.307	.531				320	3.3
-56	3.213	3.996	2.395	2.093	1.0470	1.984		1.789	4.215	.327	.563				450	3.50
-64	3.711	4.496	2.667	2.313	1.1560	2.234		2.009	4.715	.347	.594				600	4.

(F)

Material: See procurement specifications
Color identification per MIL-F-8615
The valves, when mounted on MS33535 pad and discharging into an open tank, shall achieve the following performance:

1. Opening and closing pressure per MIL-V-7899
2. Pressure drop at rated flow shall be less than 45 inches water.
3. Leakage: -32 and smaller - 0.5 cc per minute (max)
   larger sizes - 1.0 cc per minute (max)

Assembly date mark per MIL-STD-1523
Dimensions in inches. Tolerances: .XXX ±.005
.XXXX ±.0025

(F) FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(F) DENOTES CHANGE

APPROVED 31 DEC 52 REVISED (A) 17 APR 53 (B) 4 SEP 62 (C) 12 JUN 74 (D) 12 JAN 76 (E) 13 MAY 77 (F) 17 May 84

P.A. AIR FORCE - 82
Other Cust (F)
ARMY - AV
NAVY - AS
AIR FORCE - 99

PROCUREMENT SPECIFICATION
MIL-V-7899

TITLE
DISK, VALVE

SUPERSEDES:

MILITARY STANDARD
MS29521
SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT 4820-0480

User activities:

Review activities:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:01Z
Check the source to verify that this is the current version before use.