

FED. SUP CLASS
5935

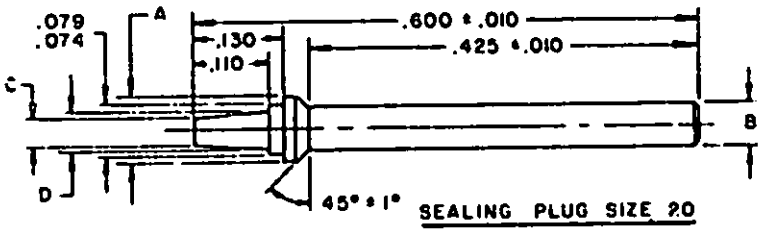

SEALING PLUG SIZE 20

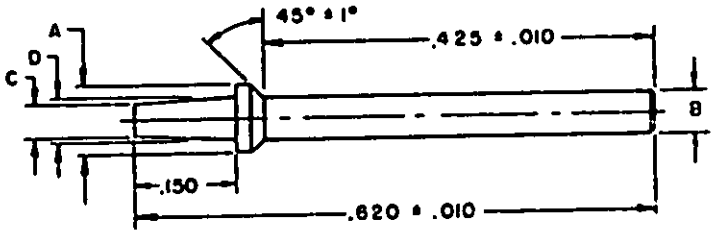

SEALING PLUG SIZES 12 - 16

Part number	Size	A	B ±.003	C	D	Color code
MS3187 A20	A20	.106 .102	.066	.034 .030	.042 .037	Red
MS3187-16	16	.105 .101	.088	.050 .045	.064 .059	Blue
MS3187-12	12	.153 .147	.120	.082 .077	.096 .091	Yellow

(E) FIGURE 1. Grommet end seal for MIL-C-26482, series 1 and MIL-C-81703, series 2 electrical connectors.

(E) FOR CHANGES SEE SHEETS 1 & 2

PA Navy - AS Other Cust Army - EL AF - 85	International interest	TITLE (E) PLUG, END SEAL, FOR MIL-C-26482, MIL-C-5015, MIL-C-81703 AND MIL-C-83723 ELECTRICAL CONNECTORS	MILITARY STANDARD MS 3187
Procurement Specification MIL-C-26482		SUPERSEDES: MS3187(NAVY)	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) 5935-2069

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for competitive use shall be set forth in this document when applicable.


User activities: Army - AV
Navy -
Air Force -

Review activities: Army - MI, MU, EL
Navy - EC, SH
Air Force - 11, 17

Preparing activity:

APPROVED 25 Oct 66 REVISED (A) 4 Jan 67 (B) 15 Feb 67 (C) 1 Apr 71 (D) 5 Sep 75 (E) 14 April 1977

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:01Z
Check the source to verify that this is the current version before use.

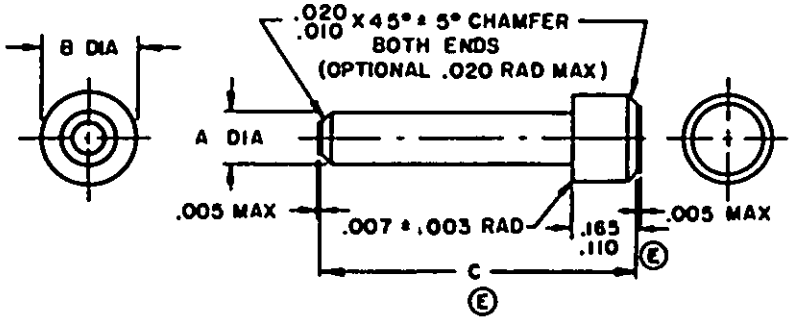

Part number	Install in connector contact cavity size	A Dia.	B Dia.	Color code	C (E)
MS3187-20-2	20	.065 .045	.100 .085	Red	.584 .544
MS3187-16-2	16	.093 .073	.138 .128	Blue	.584 .544
MS3187-12-2	12	.131 .111	.176 .166	Yellow	.584 .544
MS3187-8-2	8	.195 .175	.320 .310	Red	.480 .460
(E) MS3187-4-2	4	.320 .300	.420 .410	Blue	.480 .460
MS3187-0-2	0	.450 .430	.610 .600	Yellow	1.010 .990

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005 inch.
3. Flash not to exceed .010 inch.
4. Break all sharp corners.
(E) 5. Material: Nylon, in accordance with specification MIL-M-20693, type III for MIL-C-26482, series I and MIL-C-81703, series 2. TFE or equivalent nonconductive material capable of passing all class R performance requirements without damage to connector or plug. For MIL-C-26482, series 2, MIL-C-5015, MIL-C-81703, series 3, and MIL-C-83723.
6. Color: Coding colors are specified and in accordance with MIL-STD-104.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.

(E) FIGURE 2. Grommet end seal for MIL-C-26482, series 2, MIL-C-5015, MIL-C-81703, series 3, and MIL-C-83723 electrical connectors.

APPROVED 25 Oct 66 REVISED (D) Entire standard revised (E) FOR CHGS. SEE SHEETS 1 & 2

User activities: Army - AV
Navy -
Air Force -

Review activities: Army - MI, MU, EL
Navy - EC, SH
Air Force - 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A Navy - AS Other Cust Army - EL AF - 85	International Interest /	TITLE (E) PLUG, END SEAL, FOR MIL-C-26482, MIL-C-5015, MIL-C-81703 AND MIL-C-83723 ELECTRICAL CONNECTORS	MILITARY STANDARD MS 3187
Procurement Specification MIL-C-26482		SUPERSEDES: MS3187(NAVY)	PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:01Z
Check the source to verify that this is the current version before use.