
This document has been promulgated by the Department of Defense as the military standard to limit the selection of the item, product, or design covered herein in engineering, design, and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

FED. SUP CLASS
5935

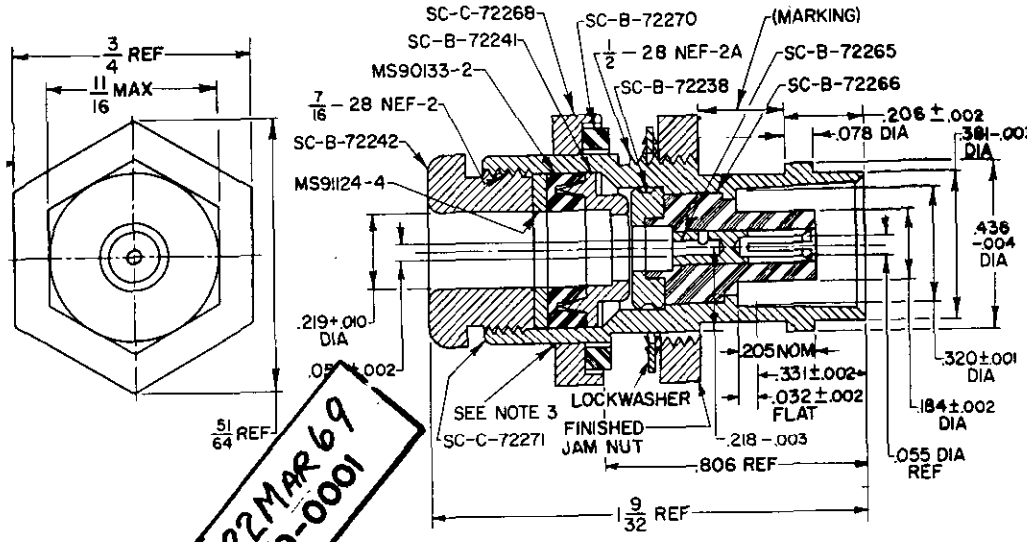

MS PART NO. MS35180-909B	FIIN[1]

[1] Federal Item Identification Number.

SIGNAL CORPS DRAWING NO. OR MS PART NO.	DESCRIPTION	QTY
SC-B-72238	Bushing	1
SC-B-72241	Clamp	1
SC-B-72242	Nut	1
SC-B-72265	Contact	1
SC-B-72266	Insulator	1
SC-C-72268	Flange	1
SC-B-72270	Gasket	1
SC-C-72271	Body	1
MS90133-2	V-Groove gasket	1
MS91124-4	Flat washer	1
---	Lockwasher; externally toothed, phosphor bronze, silver plated, 0.530 max and 0.513 min ID; 0.900 max and 0.880 min OD	1
---	Finished jam nut; 1/2-28 UNEF-2B, brass, 0.736 min across flats, 7/64 thick	1

1. All dimensions in inches.
2. Unless otherwise specified, tolerances are ±1/64 on fractions and ±.005 on decimals.
3. Silver solder all around.
4. Plug UG-909B/U replaces plugs UG-909/U, and -909A/U.
5. The part number consists of the MS military-standard number followed by a dash number. The dash number "909B" is derived from assigned nomenclature.
6. Referenced documents shall be of the issue in effect on date of invitations for bid.
7. This standard takes precedence over documents referenced herein.

ENGINEERING DATA: SMALL, WEATHERPROOF, QUICK-DISCONNECT, RADIO-FREQUENCY COAXIAL CONNECTOR; NOMINAL IMPEDANCE, 50 OHMS; RATED AT 500 VOLTS PEAK; PRACTICAL FREQUENCY LIMIT, 10,000 MC/SEC; FOR USE WITH RG-55/U, RG-58/U AND RG-223/U RF CABLES. THIS CONNECTOR AND CABLE RG-55/U ARE NOT ELECTRICALLY MATCHED. DESIGNED FOR USE WITH PANELS .045 TO 1/4 INCH THICK MAXIMUM.

(C) ENTIRE STANDARD REVISED

AFPROVED 17 Apr 1953 REVISED (A) 30 Oct 1956 (B) 30 June 1958 (C) 18 Oct 1960 (D) CANCELLED 22 March 1969

CANCELED AFTER 22MAR69
USE MIL-C-39012/19-0001

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. SigC Other Cust BuShips USAF	TITLE CONNECTOR, PLUG, ELECTRICAL, SERIES BNC, UG-909B/U	MILITARY STANDARD MS35180
PROCUREMENT SPECIFICATION MIL-C-3608	SUPERSEDES: SIGNAL CORPS DRAWING SC-D-72267	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-1665-10

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-518/A-5390

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.