INCH-POUND
MS35673B
31 August 2011
SUPERSEDING
MS35673A
17 March 1965

DETAIL SPECIFICATION SHEET

PIN, GROOVED, HEADLESS – LONGITUDINAL TAPER GROOVE, BRASS

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and procurement specification NASM20700.

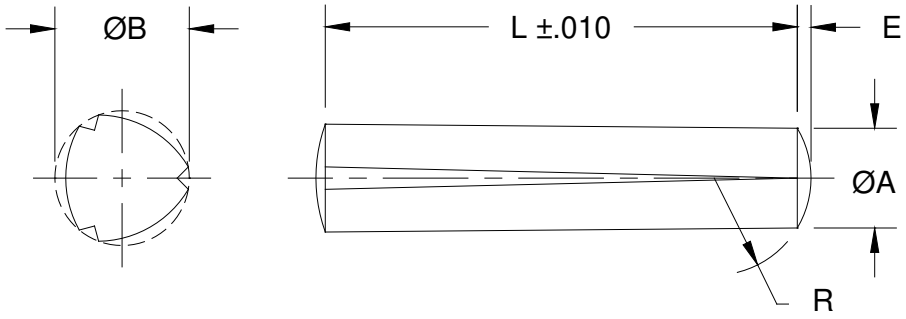


FIGURE 1. Pin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.

TABLE I. Dash Numbers and Dimensions.

NOMINAL SIZE		3/64		1/16		5/64		3/32	
∅A	MAX	.0469		.0625		.0781		.0938	
	MIN	.0459		.0615		.0771		.0928	
E CROWN HEIGHT	REF	----		.0065		.0087		.0091	
R RADIUS	MAX	----		.0881		.1037		.1350	
	MIN	----		.0681		.0837		.1150	
RECOMMENDED HOLE SIZE	MAX	.0478		.0640		.0798		.0956	
	MIN	.0465		.0625		.0781		.0938	
SINGLE SHEAR STRENGTH – LBS	MIN	70		120		190		270	
L LENGTH		DASH NO.	∅B ±.001	DASH NO.	∅B ±.001	DASH NO.	∅B ±.001	DASH NO.	∅B ±.001
.088		201	.051						
.250		202	.051	206	.068	211	.084		
.375		203	.051	207	.068	212	.084	216	.101
.500		204	.051	208	.068	213	.084	217	.101
.625		205	.051	209	.068	214	.084	218	.101
.750				210	.068	215	.084	219	.101
1.000								220	.101

NOMINAL SIZE		1/8		5/32		3/16		1/4	
∅A	MAX	.1250		.1563		.1875		.2500	
	MIN	.1230		.1543		.1855		.2480	
E CROWN HEIGHT	REF	.0130		.0170		.0180		.0260	
R RADIUS	MAX	.1662		.1975		.2600		.3225	
	MIN	.1462		.1775		.2400		.3025	
RECOMMENDED HOLE SIZE	MAX	.1271		.1587		.1903		.2534	
	MIN	.1250		.1563		.1875		.2500	
SINGLE SHEAR STRENGTH – LBS	MIN	490		760		1100		1960	
L LENGTH		DASH NO.	∅B ±.002	DASH NO.	∅B ±.002	DASH NO.	∅B ±.002	DASH NO.	∅B ±.002
.500		221	.134	227	.166				
.625		222	.134	228	.166	233	.198	241	.263
.750		223	.134	229	.166	234	.198	242	.263
1.000		224	.133	230	.165	235	.198	243	.263
1.250		225	.132	231	.164	236	.197	244	.263
1.500		226	.132	232	.164	237	.197	245	.262
1.750						238	.197	246	.262
2.000						239	.196	247	.262
2.250						240	.196	248	.262
2.500								249	.261
2.750								250	.261

REQUIREMENTS:

1. Material: Brass, Bar or wire, ½ hard, in accordance with the procurement specification.

2. Protective Coating: Black Oxide in accordance with the procurement specification.

3. Application: Grooved pins are locked securely in place by elastic deformation eliminating the need for tapping or reaming of tapered or sized holes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.

4. Dimensions: All dimensions are in inches, unless otherwise specified.

5. Part Number: The MS part number pins consists of the MS number, plus the dash number.
   Example: MS35673-201.

NOTES:
1. " ∅B" is the expanded diameter as measured with ring gage.
2. Ends of pins may be square with .01-inch to .02-inch radius on the edges.
3. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
4. Referenced documents shall be of the issue in effect on date of invitations for bid.
5. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

MILITARY INTEREST

Custodians:
Army – AR
Navy – AS
Air Force – 99

Preparing activity:
DLA - IS

(Project 5315-2011-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.