This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review Interest: MO
User Interest: CL, YD, MC, WC

DD FORM 1426 672-1 (Limited coordination)

PROCUREMENT SPECIFICATION MIL-A-52363

P.A. Army - MO(ERDL) Other Cast Navy - YD Air Force - 85

SUPERSEDES:


TITLE AIR CLEANER, INTAKE; DRY TYPE, FOR INTERNAL COMBUSTION ENGINES (CLASS I AND II)

MILITARY STANDARD

MS 39247

SHEET 1 OF 1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

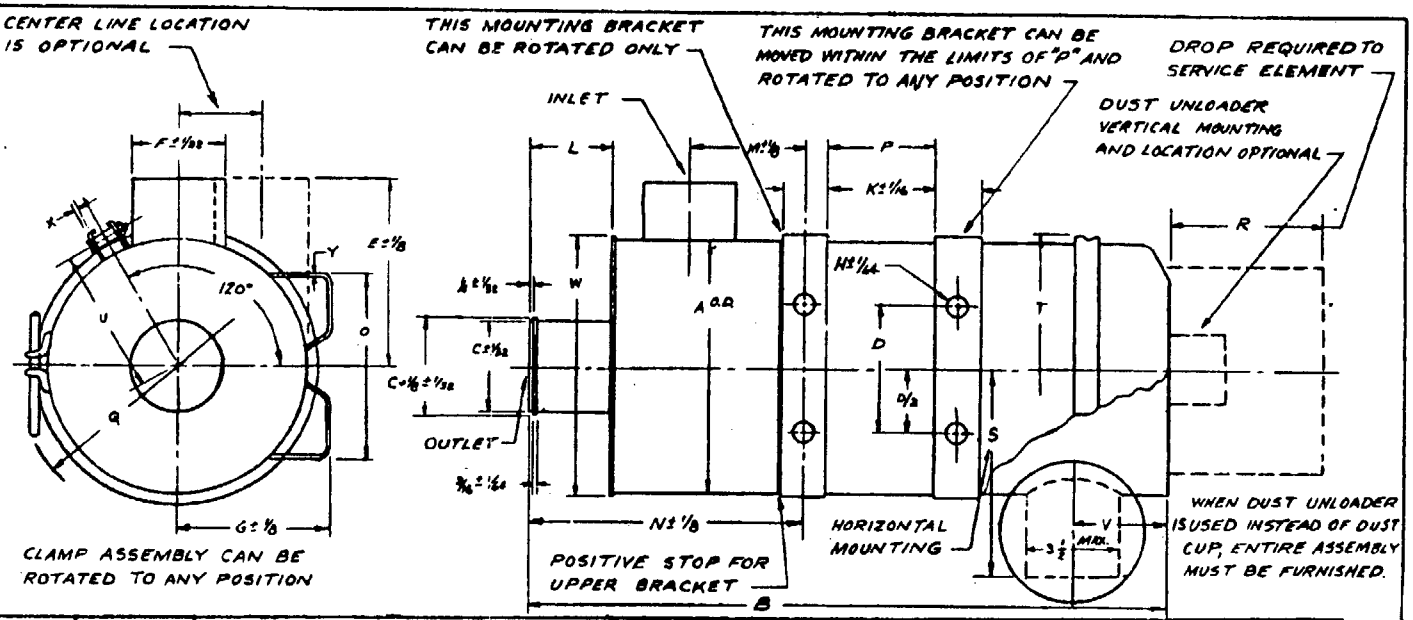

MS NUMBER	MAXIMUM RATING, CFM		DIMENSIONS																						
			MAXIMUM								MINIMUM				FIXED										
	CLASS I	CLASS II	A	B+R	O	Q	T	U	W	S	L	Y	X	Y	C	D	E	F	G	H	K	M	N	P
39247-1	90	75	5-1/2	23-1/16	4-1/16	10-1/2	6-1/2	3-1/2	5-5/16	6-3/16	1-1/2	1-1/16	16	14	2	3-1/4	4	2	3-3/16	11/32	1/8	3	5-1/8	2-3/16
39247-2	135	110	6-5/8	27	5-1/16	12	7-1/8	3-3/4	6-3/8	7-1/2	1-1/2	1-3/16	16	16	2-1/4	3-3/4	4-3/4	2-1/2	3-3/8	13/32	1/8	3-5/16	6-1/2	3
39247-3	200	160	8-1/8	31	5-5/8	13-1/2	9	4-1/2	8-1/4	8-1/2	1-1/2	1-3/4	16	14	3	4-1/4	6-1/8	3	4-1/2	7/16	1"	3-5/16	7-1/4	3
39247-4	300	240	10-1/2	34-3/4	6-1/8	15	11-1/2	5-5/8	10-3/16	9-1/2	1-1/2	2	14	12	4	5	7-1/2	4	5-3/4	7/16	1-1/2	3	7-1/2	4-1/16
39247-5	450	350	12-1/8	33	7-3/8	16-1/2	13-5/8	6-1/2	12-1/16	10-1/2	1-3/4	2	12	10	4	6	7-3/8	4-1/2	7	9/16	1-1/2	3-1/2	9	3-1/16
39247-6	750	615	14-1/8	38-1/2	11	18-1/2	16	7-5/12	14-1/16	11-1/16	1-3/4	2	12	9/16	5-1/2	8	9	5	8	9/16	1-1/2	3-3/4	9-1/2	5
39247-7	1000	840	16-1/8	45-1/2	11-5/8	20-1/2	18	9	16-1/4	12-1/16	1-3/4	2	12	9/16	6	10	12	6	9-1/8	15/32	1-1/2	4-1/16	11	6

NOTES:

1. Application rating shall be not more than 5% above the maximum rating specified.
2. W = Maximum O.D. of localized beads or protrusions except as otherwise noted.
3. T = Maximum O.D. of cup-to-body clamp, below lower mounting bracket.
4. Q = Maximum O.D. to accommodate cup-to-body clamp handle, mounting band clamps, or optional cup-to-body side-rod bolts.
5. All dimensions are in inches, except Y & X are sheet metal gauge.
6. Modifications in outside appearance and construction are acceptable provided interchangeability of cleaner assembly is not affected.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitation for bid.
9. The MS part number consist of the MS sheet number plus the dash number.

FED. SUP CLASS 2940

APPROVED 24 September 1964 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.