

FED. SUP. CLASS.
5305

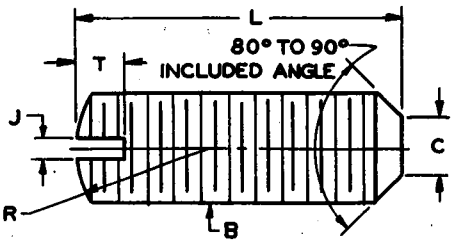


| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| D | NOMINAL SIZE | | #0 (.060) | | #1 (.073) | | #2 (.086) | | #4 (.112) |
| B | THREADS PER INCH | | 80NF-2A | | 72NF-2A | | 64NF-2A | | 48NF-2A |
| J | WIDTH OF SLOT | | .015 | | .015 | | .018 | | .020 |
| T | DEPTH OF SLOT | | .020 | | .020 | | .022 | | .028 |
| C | DIAMETER OF POINT | MAX | .040 | | .040 | | .047 | | .061 |
| | | MIN | .033 | | .033 | | .039 | | .051 |
| R | RADIUS | | .060 | | .073 | | .086 | | .112 |
| L | LENGTH | TOLERANCE | DASH No. | FIIN | DASH No. | FIIN | DASH No. | FIIN | DASH No. | FIIN |
| 1/16 | | + 0 | 1* | | 9* | | | | | |
| 3/32 | | - 1/32 | 2* | | 10* | | 18* | | | |
| 1/8 | | | 3* | | 11* | | 19* | | 30* | |
| 5/32 | | | | | 12* | | 20* | | 31* | |
| 3/16 | | | | | | | 21* | | 32* | |
| 1/4 | | | | | | | 22* | | 33* | |
| 5/16 | | | | | | | 23* | | 34* | |
| 3/8 | | | | | | | 24* | | 35* | |

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| D | NOMINAL SIZE | | #6 (.138) | | #8 (.164) | | #10 (.190) | | |
| B | THREADS PER INCH | | 40NF-2A | | 36NF-2A | | 32NF-2A | | |
| J | WIDTH OF SLOT | | .025 | | .029 | | .032 | | |
| T | DEPTH OF SLOT | | .035 | | .041 | | .048 | | |
| C | DIAMETER OF POINT | MAX | .074 | | .087 | | .102 | | |
| | | MIN | .064 | | .076 | | .088 | | |
| R | RADIUS | | .138 | | .164 | | .190 | | |
| L | LENGTH | TOLERANCE | DASH No. | FIIN | DASH No. | FIIN | DASH No. | FIIN | | |
| 1/8 | | + 0 | 41* | | 52* | | 63* | | | |
| 5/32 | | - 1/32 | 42* | | 53* | | 64* | | | |
| 3/16 | | | 43* | | 54* | | 65* | | | |
| 1/4 | | | 44* | | 55* | | 66* | | | |
| 5/16 | | | 45* | | 56* | | 67* | | | |
| 3/8 | | | 46* | | 57* | | 68* | | | |

* INDICATES MANUFACTURER'S NON-STOCK PRODUCTION ITEMS.
MATERIAL: BRASS, HALF-HARD, COMPOSITION "B", IN ACCORDANCE WITH SPECIFICATION QQ-B-626.
PROTECTIVE COATING: UNCOATED.
THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH SCREW-THREAD STANDARDS FOR FEDERAL SERVICES HANDBOOK H-28.
DIMENSIONS: ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS51058-1.
NOTES: (1) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
(2) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 7 MAY 1958 REVISED

| CUSTODIANS | OTHER INT. |
|---|---|
| A - ORD | A- CESIGT |
| N - SHIPS | N- AMCOR |
| AF - USAF | AF- |

# MILITARY STANDARD

## SETSCREW, SLOTTED, FLAT POINT, BRASS, UNCOATED, NF-2A

# MS51058

PROCUREMENT SPECIFICATION: FF-S-103

SUPERSEDES:

SHEET 1 OF 1

DD FORM 1 OCT 52 672-1

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T17:56Z
Check the source to verify that this is the current version before use.