
FED. SUP CLASS.
5305

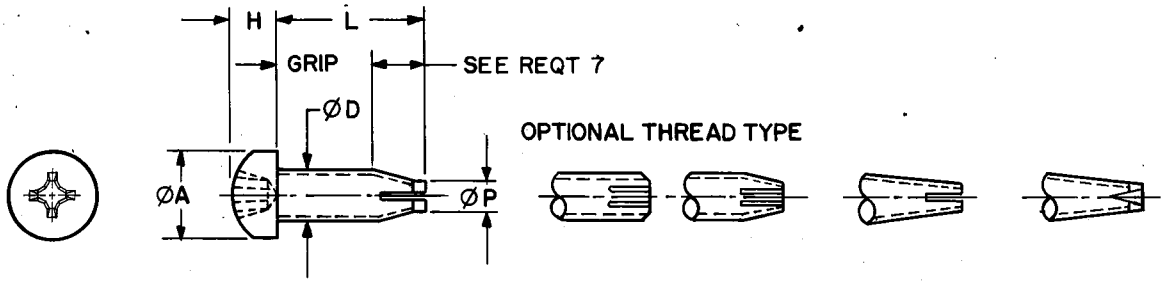

TYPE D TYPE F TYPE G TYPE T

TABLE I. DIMENSIONS AND PART NUMBERS.

NOMINAL SIZE			.112	.138	.164	.190
THREADS PER INCH			40	32	32	24
ØD - MAJOR DIAMETER		MAX MIN	.1120 .1072	.1380 .1326	.1640 .1586	.1900 .1834
ØA - HEAD DIAMETER		MAX MIN	.2190 .2050	.2700 .2560	.3220 .3060	.3730 .3570
H - HEAD HEIGHT		MAX MIN	.0800 .0700	.0970 .0870	.1150 .1050	.1330 .1220
ØP - POINT DIAMETER		MAX MIN	.0860 .0770	.1060 .0950	.1320 .1210	.1470 .1330
L - LENGTH	TOLERANCE		DASH NO	DASH NO	DASH NO	DASH NO
.375 .500	+ .000 - .031		1 (GRIP MIN .231)	2 (GRIP MIN .203)	3 (GRIP MIN .328)	4 (GRIP MIN .281)

REQUIREMENTS:

1. MATERIAL. CARBON STEEL IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
2. FINISH. ZINC COATING IN ACCORDANCE WITH ASTM B633-78, $Fe/Zn5$ (5 µm), TYPE II.
3. THREADS. THE THREADS TO BE IN ACCORDANCE WITH APPLICABLE REQUIREMENTS OF PROCUREMENT SPECIFICATIONS.
4. HEAT TREATMENT. CASE HARDEN OR HEAT TREATMENT TO MEET PERFORMANCE REQUIREMENTS OF PROCUREMENT SPECIFICATIONS.
5. RECESS. THE RECESS SHALL BE IN ACCORDANCE WITH MS9006.
6. PART NUMBER. THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS51485-1 - SCREW, TAPPING, THREAD CUTTING, TYPES D, F, G OR T PAN HEAD, CROSS-RECESSED, CARBON STEEL, NOMINAL SIZE .112, LENGTH .375, ZINC COATED

7. TAPE LENGTH. THE TAPER LENGTH IS 2.500 TO 3.500 TIMES THE PITCH DISTANCE FOR SCREWS HAVING A THREAD LENGTH OF 8 PITCHES OR LESS.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. TYPE DESIGNATIONS ARE ESTABLISHED BY THE PROCUREMENT SPECIFICATION.
3. FOR AERONAUTICAL APPLICATIONS, THESE SCREWS ARE SUBJECT TO MS33749 LIMITATION AND INSTALLATION REQUIREMENTS.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:
ARMY-MI
NAVY-MC,OS

REVIEWER ACTIVITIES:
ARMY-EA
AIR FORCE-82
DLA-IS
NSA-NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 1 AUG 84 REVISED

P.A. AR Other Cust SH 99	INTERNATIONAL INTEREST	TITLE SCREW, TAPPING, THREAD CUTTING, TYPES D, F, G, OR T PAN HEAD, CROSS-RECESSED, CARBON STEEL	MILITARY STANDARD MS51485
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES:		PAGE 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:02Z
Check the source to verify that this is the current version before use.