
FED. SUP CLASS
2320

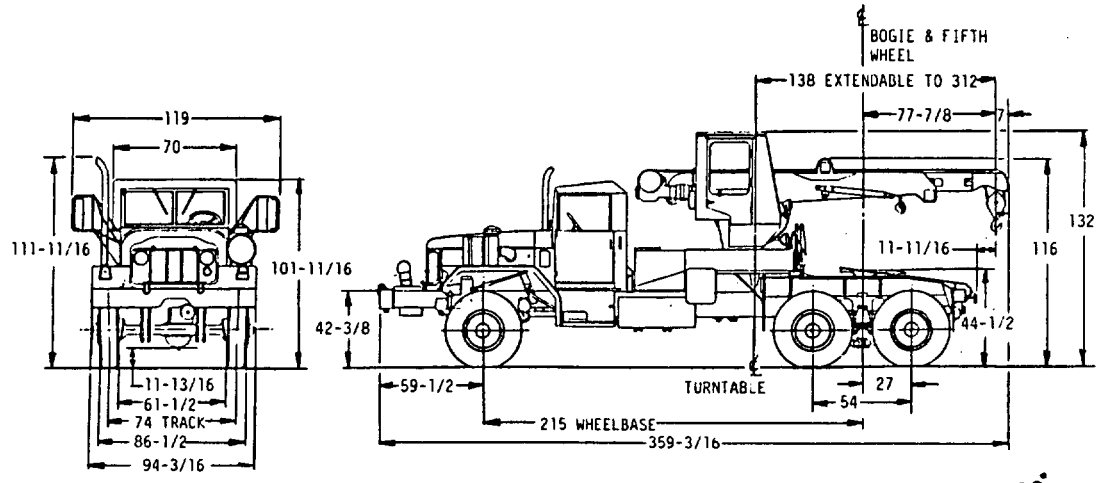

VEHICLE CHARACTERISTICS

CHASSIS MODEL:	M811A1
BRIDGE CLASSIFICATION: (SHORT TONS) W/W	
EMPTY	16
WITH PAYLOAD	22
CURB WEIGHT, FULLY EQUIPPED LESS PAYLOAD & CREW:	
FRONT	14,665 LBS
REAR BOGIE	20,400 LBS
TOTAL	35,065 LBS
TRAILER LOAD ON FIFTH WHEEL:	12,500 LBS
SEMI-TRAILER WEIGHT:	37,500 LBS
GROSS WEIGHT, FULLY EQUIPPED PLUS SEMITRAILER WEIGHT WITH PAYLOAD, LESS CREW: (ADD 400 LBS FOR 2-MAN CREW W/EQUIPMENT)	
FRONT	14,665 LBS
REAR BOGIE	32,400 LBS
TRAILER BOGIE	25,500 LBS
TOTAL	72,565 LBS
TOWED LOAD ALLOWANCE:(PINTLE)	15,000 LBS
MAXIMUM VERTICAL LOAD ON PINTLE:	1,500 LBS
CAPACITIES:	
COOLING SYSTEM	37-1/2 QT
CRANKCASE W/O FILTER 24 W/FILTER 28	QT
DIFFERENTIALS (EACH)	12 QT
TRANSFER CASE	7 QT
STEERING	5 QT
TRANSMISSION W/PTO 11 QT W/O PTO 9	QT

CENTER OF GRAVITY: (AT CURB WEIGHT)	
ABOVE GROUND	56-5/8
REAR OF CENTERLINE OF FRONT AXLE	125-1/8
CENTER OF GRAVITY: (W/PAYLOAD)	
ABOVE GROUND	N/A
REAR OF CENTERLINE OF FRONT AXLE	148-1/8
PERFORMANCE:	
AT GROSS WEIGHT W/O TOWED LOAD	
MAXIMUM SPEED	52 MPH
MAXIMUM GRADE	60%
CRUISING RANGE	350 MILES
AT GROSS WEIGHT W TOWED LOAD	
MAXIMUM SPEED	52 MPH
MAXIMUM GRADE	33%
CRUISING RANGE	300 MILES
FORDING DEPTH: W/KIT 78 W/O KIT 30	
BODY: WRECKER BODY	8737849
INCLUDES STANDARD 33 IN DIA FIFTH WHEEL, WITH 20,000 LBS CAPACITY, HYDRAULICALLY OPERATED CRANE, AND AN 11 FT, 6 IN TO 28 FT BOOM.	
SHIPPING DIMENSIONS:	
CUBIC FEET	2363
SQUARE FEET	245
WIDTH (EXCLUDING MIRRORS)	98
HEIGHT (WITH MACHINE GUN RING MOUNT)	119-5/16
ON-VEHICLE EQUIPMENT: (OVE)	
BASIC ISSUE ITEMS	12300877
ADDITIONAL AUTHORIZED LIST	12300998
ACCESSORY SUPPLEMENTAL KITS:	12300925

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

INACTIVE FOR DESIGN AFTER 4 MARCH 88.
Ⓐ NO SUPERSEDING STANDARD. SEE MIL-STD-962 FOR STATUS CRITERIA.

APPROVED 14 JUN 85 REVISED Ⓐ 4 MARCH 88

MS PART NO.	ENGINEERING DWG NO.	
MS52191-1	8736869	WITH WINCH

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: TRUCK: WRECKER, TRACTOR, 5 TON, 6×6, M819	MILITARY STANDARD MS52191(AT)
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2320-A377

USER ACTIVITIES:

REVIEWER ACTIVITIES:

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.