
FED. SUP CLASS
2320

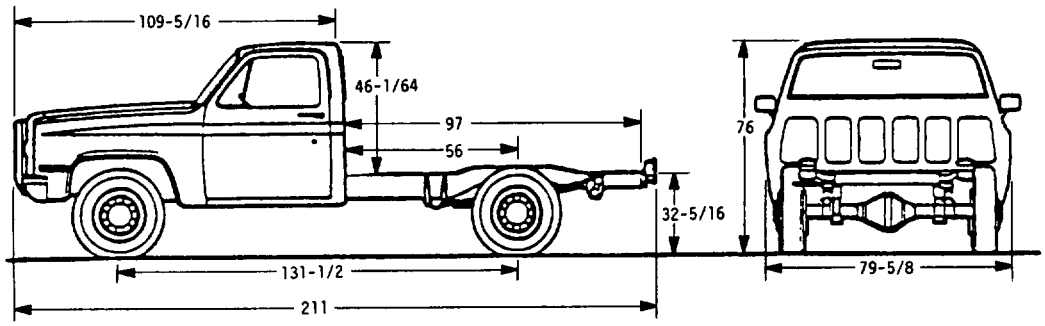


VEHICLE CHARACTERISTICS

MODEL: M1031

FRAME:

CHANNEL-SECTION DESIGN WITH LADDER-TYPE CONSTRUCTION.

SIDE RAIL DIMENSIONS:

| | |
|---|---|
| WIDTH | 2-25/32 IN |
| DEPTH | 7-3/4 IN |
| THICKNESS | 3/16 IN |
| SECTION MODULUS | 6.14 $IN^3$ |
| WIDTH OVER RAILS | |
| FRONT | 28-3/32 IN |
| REAR | 34-1/32 IN |
| OVERALL LENGTH OF RAIL | 204-1/8 IN |

CURB WEIGHT:

| | |
|---|---|
| TRUCK, CHASSIS, FULLY EQUIPPED LESS PAYLOAD AND CREW | 5,300 LBS |

PAYLOAD: 3,600 LBS

GROSS WEIGHT:

| | |
|---|---|
| FULLY EQUIPPED, LOADED | 8,900 LBS |

ENGINE:

6.2 LITER V-8 DIESEL

| | |
|---|---|
| PISTON DISPLACEMENT | 379 CU IN |
| TYPE | VALVE-IN-HEAD |
| BORE AND STROKE | 3.98 X 3.82 IN |
| COMPRESSION RATIO | 21.5 : 1 |
| EXHAUST | DUAL |
| SAE NET HORSEPOWER | 135 AT 3,600 RPM |
| SAE NET TORQUE LB-FT | 240 AT 2,000 RPM |

TRANSMISSION:

THREE SPEED AUTOMATIC TRANSMISSION.

| GEAR TYPE | | PLANETARY | |
|---|---|---|---|
| TORQUE CONVERTER | | LOCKUP | BREAKAWAY |
| GEAR RATIOS: | | | |
| | FIRST | 2.48 | 5.70 |
| | SECOND | 1.48 | 3.40 |
| | THIRD | 1.00 | 2.30 |
| | REVERSE | 2.10 | 4.83 |

TRANSFER CASE:

PART-TIME FOUR WHEEL DRIVE WITH MANUAL LOCKING HUBS IN THE FRONT AXLE.

| | |
|---|---|
| LEVER LOCATION | FLOOR, RIGHT OF CENTER |
| LEVER POSITION | 4-LOW (ALL WHEEL UNDERDRIVE)<br>N (NEUTRAL)<br>4-HIGH (ALL WHEEL DIRECT DRIVE)<br>2-HIGH (REAR WHEEL DRIVE) |
| RATIOS: | |
| HIGH RANGE | 1.00 : 1 |
| LOW RANGE | 2.61 : 1 |

FRONT AXLE AND SUSPENSION:

THE FRONT AXLE IS A FULL-FLOATING DESIGN AND HAS A RATING OF 4,500 LBS. THE FRONT SUSPENSION IS A TAPERED LEAF (THREE-LEAF) DESIGN RATED AT 2,250 LBS PER SPRING. FRONT SHOCK ABSORBERS ARE HEAVY DUTY. A FRONT STABILIZER BAR IS INCLUDED.

REAR AXLE AND SUSPENSION:

THE REAR AXLE IS A FULL-FLOATING DESIGN WITH AN AXLE RATING OF 7,500 LBS AND IS EQUIPPED WITH A LOCKING DIFFERENTIAL. THE REAR SUSPENSION IS A TWO-STAGE, SEMI-ELLIPTIC LEAF SPRING (8 LEAVES PER SPRING), RATED AT 3,750 LBS PER SPRING. REAR SHOCK ABSORBERS ARE ALSO HEAVY DUTY.

| | |
|---|---|
| HOUSING DIAMETER AND THICKNESS | 3-3/8 X 9/32 IN |
| RATIO | 4.56 : 1 |
| DIFFERENTIAL, TYPE | 4-PINION |
| DIFFERENTIAL BEARING, TYPE | TAPERED ROLLER |

WHEELS:

FOUR PLUS ONE SPARE; 16 X 6-1/2 IN, ONE PIECE, 8 LUG.

TIRES:

FOUR PLUS ONE SPARE; LT235/85R-16E, ON/OFF ROAD TREAD DESIGN, STEEL BELTED RADIAL BLACKWALLS.

ELECTRICAL SYSTEM:

28 VOLT WITH TWO 12 VOLT BATTERIES CONNECTED IN SERIES AND TWO 100 AMPERE ALTERNATORS.

PERFORMANCE AT GVW:

VEHICLE IS ABLE TO ASCEND A GRADE OF

3% AT 55 MI/HR
6% AT 45 MI/HR
30% AT 10 MI/HR

FORDING: 20 IN AT 5 MI/HR

RANGE:

250 MILES WITH PAYLOAD, IN TWO WHEEL DRIVE, AT A CONSTANT SPEED OF 55 MI/HR.

TOWING:

CAPABLE OF TOWING MILITARY SERIES M101 TRAILER (3,000 LBS) LOADED.

ENVIRONMENTAL CAPABILITY:

CAPABLE OF OPERATION IN TEMPERATURES OF

$-10^0$ F TO $120^0$ F WITHOUT WINTERIZATION KIT
$-50^0$ F TO $120^0$ F WITH WINTERIZATION KIT

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MI 48397-5000.

APPROVED 3 JUL 85 REVISED

| P. A. ARMY-AT Other Cust | INTERNATIONAL INTEREST | TITLE TRUCK,CHASSIS,TACTICAL, 1-1/4 TON,4X4, M1031 (COMMERCIAL) | MILITARY STANDARD MS52212(AT) |
|---|---|---|---|
| PROCUREMENT SPECIFICATION ATPD 2074 | SUPERSEDES: | | SHEET 1 OF 1 |

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.