
FED SUP CLASS
5935

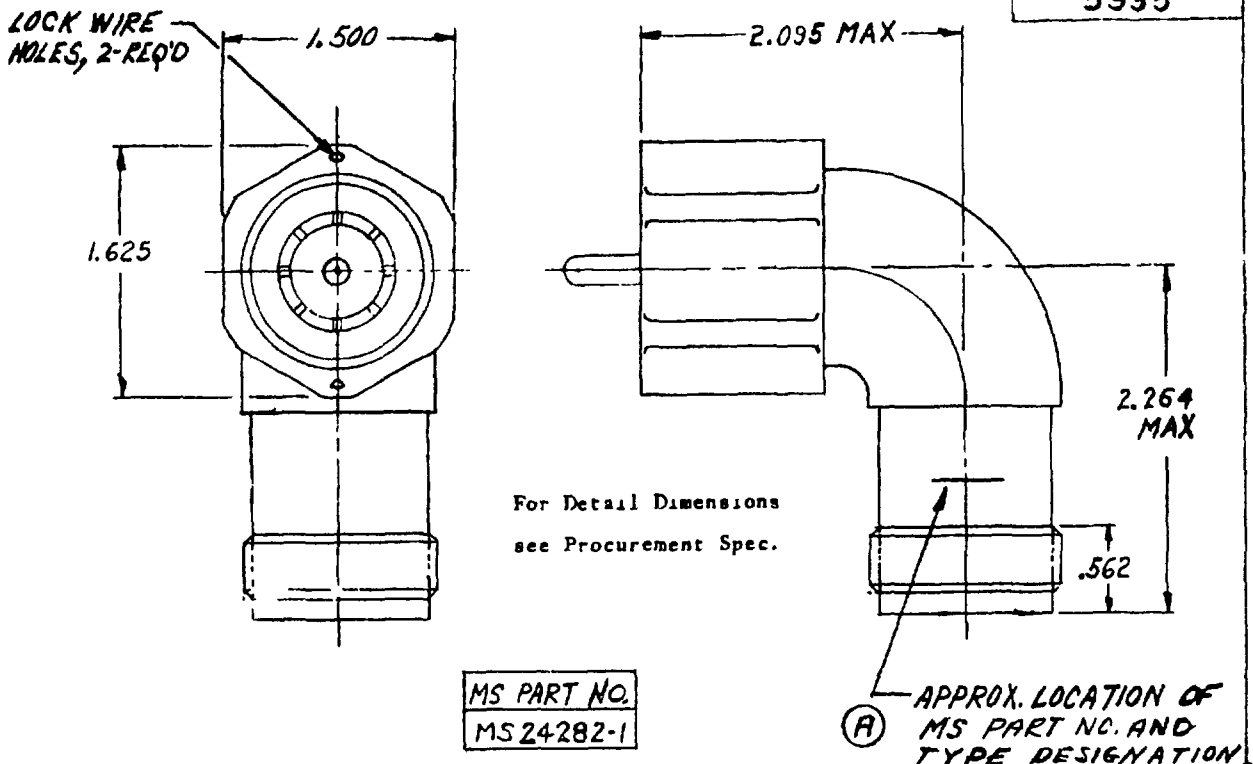

Dimensions in inches. Unless otherwise specified, tolerances: decimals ±.005, angles ± 1/2°.
Concentricity, maximum indicator reading .002
Dimensions of gages for center contacts: Pin A 0.188 O.D.
Pin B 0.180 O.D.
Dimensions of gages for outer contacts Ring A 0.794 I.D.
Ring B 0.804 I.D.

Maxi weight 7½ oz.
Coupling Nut pull 250 pounds

VSWR. 1.12 : 1 max. measured over the frequency range 30 to 5000 MC/sec in 50 MC increments.
Insertion loss 0.1 db max at 5000 MC/sec.
Corona level 7000 volts RMS min. at sea level
1700 volts RMS min at altitude
High potential 10000 volts RMS at sea level
2500 volts RMS at altitude
(A) 7500 volts RMS after moisture resistance test, vibration test and shock test
Power Handling Capability 500 watts CW range 30 to 5000 MC/sec. at 70000 ft. and 203°F. (max. temperature rise not to exceed 20°F when tested for one hour at 70000 ft. altitude, 203°F and 5000 MC.)

} These values apply to tests on individual adapters

This standard takes precedence over documents referenced herein.

Referenced documents shall be the issue in effect on date of invitations for bid.

This standard has been approved by the Department of the Air Force and is mandatory for use by that department. All other military activities are required to employ this standard where suitable.

APPROVED 5 Jan 60 REVISED (A) 18 Oct 60

NOTICE When Government drawings specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility or any obligation whatsoever and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture use, or sell any patented invention that may in any way be related thereto

CUSTODIANS	OTHER INT.
Air Force	A -
	N -
	AF -

MILITARY STANDARD
CONNECTOR, PLUG, ELECTRICAL - 90° ADAPTER, LT SERIES UG-1264/U

MS 24282 (USAF)

Procurement Specification MIL-C-26637

SUPERSEDES: 57C8580

SHEET 1 OF 1

DD FORM 672

GPO 805863

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.