INCH-POUND

MS24360C
18 April 2016
SUPERSEDING
MS24360B
01 February 1994

MILITARY SPECIFICATION SHEET

RING, LOCK FLIGHT PRESSURE REFUELING NOZZLE

Reactivated after 18 April 2016, and may be used for new and existing designs and acquisitions.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the procurement specification MIL-N-25161.

Comments, suggestions, or questions on this document should be addressed to Air Force Sustainment Center - Oklahoma City/AFLCME/LZPES, 3001 Staff Drive, Suite 1AB81A, Tinker AFB, OK 73145 or emailed to ocalc.dsp@us.af.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 1680

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

For design feature purposes, this specification sheet takes precedence over procurement documents referenced herein. Referenced documents shall be of the issue in effect on date of invitation for bid.

REQUIREMENTS:

(B)

1. Material: Aluminum Alloy 1100, Sheet and Plate per ASTM-B209. And Foil: Nonferrous Base Metal Corrosion Resistant Steel, per SAE-AMS-5513 Comp 304 Annealed.
2. Remove all burrs and break sharp edges .016 MAX
3. Dimensions in inches. Unless otherwise specified, Tolerances: Decimals ±.010, Angles ±2°.
4. This Specification Sheet takes precedence over documents referenced herein.
5. Referenced documents shall be of the issue in effect on date or invitation for bid.

(B) 6. Denotes changes.

NOTES:

This document references the following:

ASTM-B209, Aluminum and Aluminum-Alloy Sheet and Plate

(Copies of this document are available from http://www.astm.org.)

SAE-AMS-5513, Steel, Corrosion Resistant, Sheet, Strip, and Plate 19CR - 9.2NI (SAE 30304) Solution He4at Treated

(Copies of this document are available from http://www.sae.org.)

Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

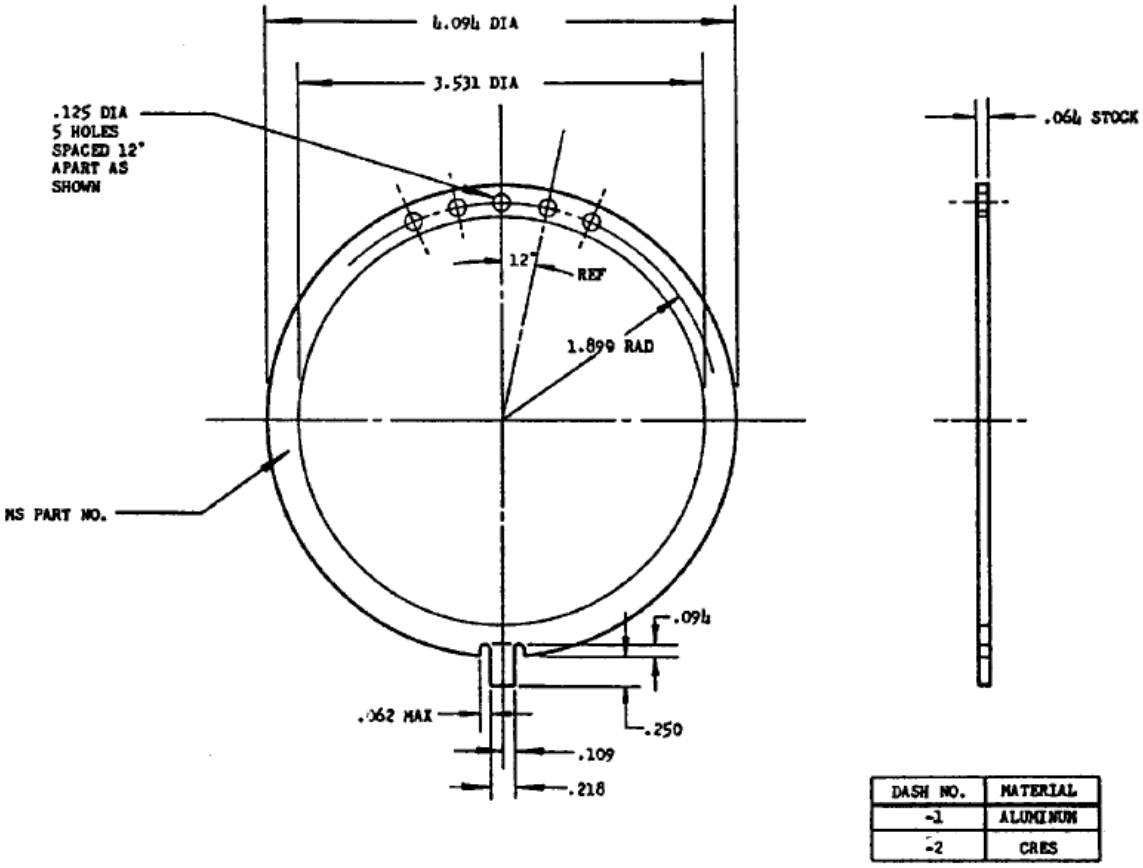


Figure 1. Ring Lock Flight Pressure Refueling Nozzle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - AS
Air Force - 71

Preparing activity
Air Force - 71

(Project 1680-2016-006)

Reviewer activities:
Air Force – 99
DLA - GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.