

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
6130

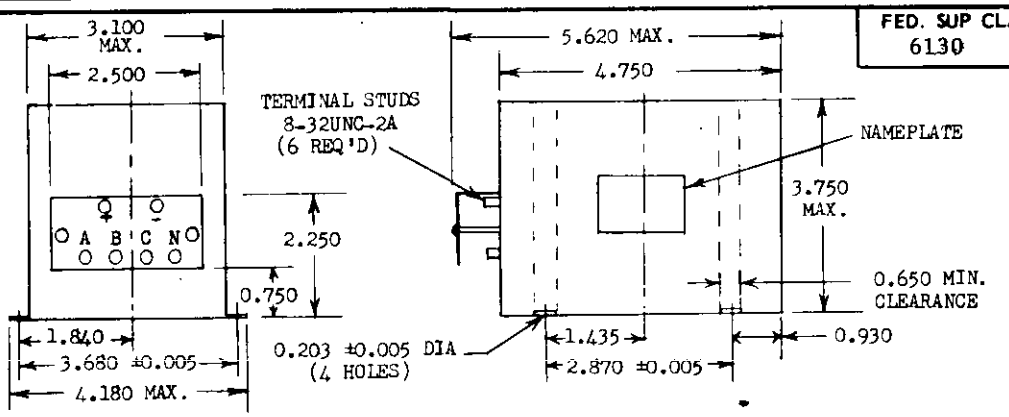

INPUT	
Voltage (Nominal)	115/200 Volts
Frequency (Nominal)	400 c.p.s.
Phase	3
OUTPUT	
Voltage (nominal) D.C.	28 Volts
Current to 50,000 ft. alt.	20 Amp.
Current at 60,000 ft. alt.	10 Amp.
EFFICIENCY	
At sea level, 25 ±15°C, half rated load to rated load	85% Min.
WEIGHT (lbs.)	4.0 Max.

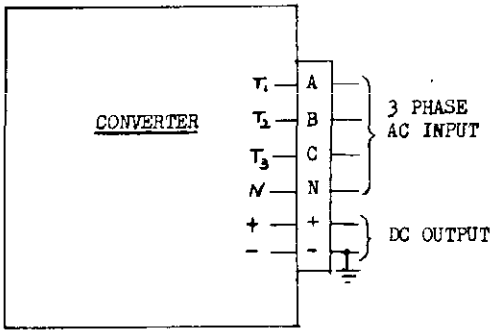

MS PART NO.
MS-25498-1

For any combination of conditions listed below, the output voltage shall remain within the indicated limits.

Conditions	Output Voltage Limits
Input voltage varied between 110/191 and 121/210 volts, and input frequency varied from 360 to 440 cps.	
Load varied from 0 to full load.	Low-25.0 High-31.0
Ambient temperature-altitude varied within the range established by Curve I of MS33543(ASG) except that ambient temperature for this unit shall never exceed the limits -55°C to +85°C. The unit shall deliver rated output to 50,000 ft. and 50% rated output at 60,000 ft.	
Mounted in any position.	

NOTES:

1. All dimensions are shown in inches. Tolerances are ±0.015 unless otherwise shown.
2. The weight and volume limitations shown on this drawing shall include the weight and volume of all auxiliary apparatus necessary to make this unit conform to the procurement specification.
3. This drawing and the procurement specification complement one another, and together completely define the product.
4. Note Deleted.

(C) CANCELLED AFTER 19 JUNE 1981. NO SUPESEDING STANDARD.

APPROVED 20 Jul 60 REVISED A 19 November 1962 (A) 21 July 1975 (C) 19 June 1981

P.A.	TITLE	MILITARY STANDARD
NAVY - BUWEPS Other Cust	CONVERTER, 20 AMPERE, CLASS B	MS25498(WEP)
Procurement Specification MIL-C-7115	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 0 - 703-023/5096

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:11Z
Check the source to verify that this is the current version before use.