This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Reviewer activities: Army AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 80, 17
DSA - ES

User activities: Army
Navy
Air Force

P.A. AF-85

Other Cust Army CR
Navy - AS

International interest

Procurement Specification
MIL-C-38999

TITLE
BACKSHELL, CONNECTOR, ELECTRICAL, EMI, SERIES I AND II

SUPERSEDES:


MILITARY STANDARD
MS27666

PAGE 1 OF 1


DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3182


Ⓑ denotes changes

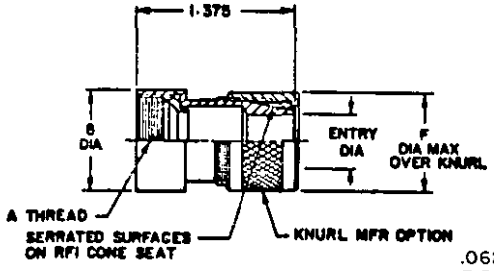

STRAIGHT BACKSHELL – 1

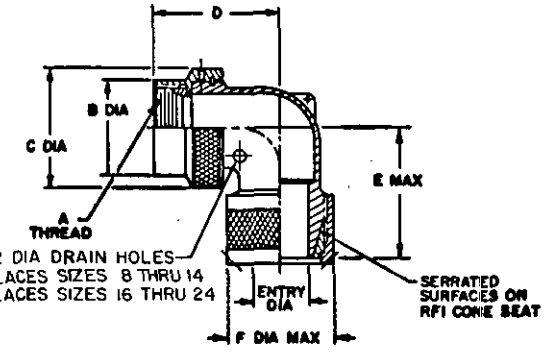

RIGHT ANGLE LONG BACKSHELL – 2

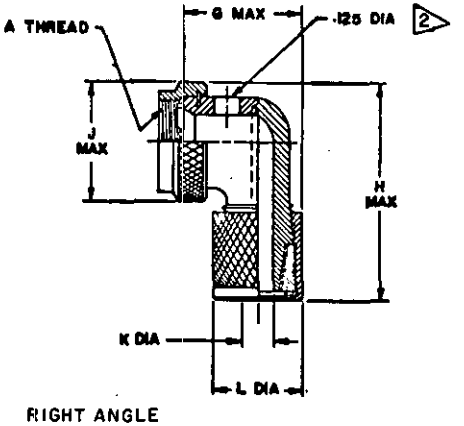

RIGHT ANGLE
SHORT BACKSHELL
2 – 3 WITHOUT ENCAPSULATING HOLES
4 WITH ENCAPSULATING HOLES

FINISH B OR F

TABLE I.

Shell size	A Thread UNEF-2B	B dia	C dia	D	E	F dia	G	H	J	K	L	M	N	P	Entry dia
8/9	7/16 - 28	.562	.84	1.14	1.27	.781	.600	1.130	.656	.156	.440	.66	1.50	1.344	.281
10/11	9/16 - 24	.687	1.09	1.20	1.31	.843	.720	1.500	.800	.250	.645	.77	1.75	1.344	.343
12/13	11/16 - 24	.812	1.09	1.27	1.31	.937	.880	1.690	.940	.325	.760	.93	1.88	1.344	.437
14/15	13/16 - 20	.937	1.21	1.33	1.38	1.062	1.015	1.937	1.062	.406	.850	1.07	2.50	1.344	.562
16/17	15/16 - 20	1.062	1.39	1.39	1.44	1.125	1.140	2.125	1.250	.500	.980	1.19	2.63	1.344	.625
18/19	1-1/16 - 18	1.187	1.65	1.45	1.59	1.187	1.265	2.375	1.390	.562	1.047	1.31	2.89	1.344	.687
20/21	1-3/16 - 18	1.312	1.65	1.52	1.59	1.250	1.375	2.562	1.500	.625	1.109	1.42	3.00	1.422	.750
22/23	1-5/16 - 18	1.437	1.94	1.58	1.76	1.375	1.600	2.700	1.650	.812	1.356	1.65	3.25	1.422	.875
24/25	1-7/16 - 18	1.562	1.94	1.56	1.76	1.500	1.718	2.850	1.850	.937	1.481	1.88	3.38	1.422	1.000

Ⓑ CANCELED AFTER 10 MARCH 81,
NO SUPERSEDING DOCUMENT.

APPROVED 14 Nov 1972 REVISED Ⓐ 2 JAN 1976 Ⓑ 10 MAR 1981

FED. SUP CLASS
5935

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/2562

Source: https://assist.dla.mil -- Downloaded: 2020-10-29T16:44:24Z
Check the source to verify that this is the current version before use.