
FED. SUP CLASS
5310

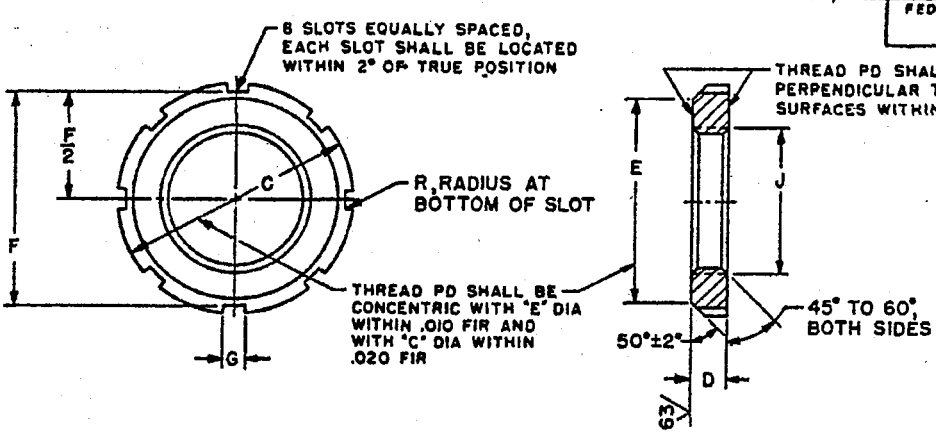

DASH NO.	T THREAD	C +.005 -.015	D ±.010	E +.000 -.020	F ±.010	G MIN	G MAX	J ±.010	R +.010 -.000	EST. WT. (LB)
1	1/2 -28UNEF-3B	1.047	.188	.859	.922	.120	.130	.510	.010	.030
2	9/16-24 NEF-3B	1.109	.219	.922	.984	.120	.130	.572	.010	.039
3	5/8 -24 NEF-3B	1.172	.219	.984	1.047	.120	.130	.635	.010	.042
4	11/16-24 NEF-3B	1.312	.219	1.125	1.188	.120	.130	.698	.010	.054
5	3/4 -20UNEF-3B	1.391	.250	1.203	1.266	.178	.198	.760	.015	.068
6	13/16-20UNEF-3B	1.469	.250	1.281	1.344	.178	.198	.822	.015	.075
7	7/8 -20UNEF-3B	1.531	.250	1.344	1.406	.178	.198	.885	.015	.079
8	15/16-20UNEF-3B	1.594	.250	1.406	1.469	.178	.198	.948	.015	.084
9	1 -20UNEF-3B	1.719	.281	1.469	1.531	.178	.198	1.010	.015	.105
10	1-1/16-18 NEF-3B	1.812	.281	1.562	1.625	.178	.198	1.072	.015	.117
11	1-1/8 -18NEF-3B	1.875	.281	1.625	1.688	.178	.198	1.135	.015	.123
12	1-3/16-18NEF-3B	1.938	.281	1.688	1.750	.178	.198	1.198	.015	.129
13	1-1/4 -18NEF-3B	2.000	.281	1.750	1.812	.178	.198	1.260	.015	.134
14	1-5/16-18NEF-3B	2.062	.281	1.812	1.875	.178	.198	1.322	.015	.140
15	1-3/8 -18NEF-3B	2.125	.281	1.875	1.938	.178	.198	1.385	.015	.146
16	1-7/16-18NEF-3B	2.188	.281	1.938	2.000	.240	.260	1.448	.020	.149
17	1-1/2 -18NEF-3B	2.250	.281	2.000	2.062	.240	.260	1.510	.020	.154
18	1-5/8 -18NEF-3B	2.375	.312	2.125	2.188	.240	.260	1.635	.020	.186
19	1-3/4 -16UN-3B	2.531	.312	2.281	2.344	.240	.260	1.760	.020	.210
20	1-7/8 -16N-3B	2.656	.312	2.406	2.469	.240	.260	1.885	.020	.223
21	2 -16UN-3B	2.781	.312	2.531	2.594	.240	.260	2.010	.020	.236
22	2-1/8 -16N-3B	2.906	.312	2.656	2.719	.240	.260	2.135	.020	.249
23	2-1/4 -16UN-3B	3.031	.312	2.781	2.844	.240	.260	2.260	.020	.263
24	2-3/8 -16N-3B	3.156	.312	2.906	2.969	.240	.260	2.385	.020	.276
25	2-1/2 -16UN-3B	3.281	.312	3.031	3.094	.240	.260	2.510	.020	.289

NOTES:

1. MATERIAL: Steel, alloy, FS4140, in accordance with Fed-Std-66.
2. PROTECTIVE COATING: Phosphate coated in accordance with MIL-P-16232, Type Z, Class 3.
3. THREADS: Threads shall be in accordance with MIL-S-7742.
4. HARDNESS: Rockwell C25-32.
5. SURFACE ROUGHNESS: All machined surfaces to be 125 micro inches minimum, in accordance with USA Standard B46.1, unless otherwise specified.
6. INSPECTION: Magnetic particle inspection in accordance with MIL-I-6868.
7. DIMENSIONS: All dimensions are in inches unless otherwise specified.
8. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS27955-1.
9. Break sharp edges .003 to .015.
10. Referenced documents shall be of the issue in effect on the date of invitations for bid.
11. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

Ⓐ ENTIRE STANDARD REVISED

P.A.	TITLE	MILITARY STANDARD
WC	NUT, PLAIN-ROUND, SPANNER	
Other Cust 69 AS		MS27955
PROCUREMENT SPECIFICATION MIL-N-21337	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-20-23T16:53:35
Check the source to verify that this is the current version before use.

REVIEWER: AV, IS, NSA, WC, 69, AS
USER: NONE

APPROVED 14 FEB 1961 REVISED Ⓐ 18 FEB 1967

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.