INCH-POUND
MS28753D
6 August 2010
SUPERSEDING
MS28753C
2 November 1999

DETAIL SPECIFICATION SHEET

# FITTING END, SELF-SEALING FUEL HOSE, SWIVEL, DETACHABLE, FLANGED, STRAIGHT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.


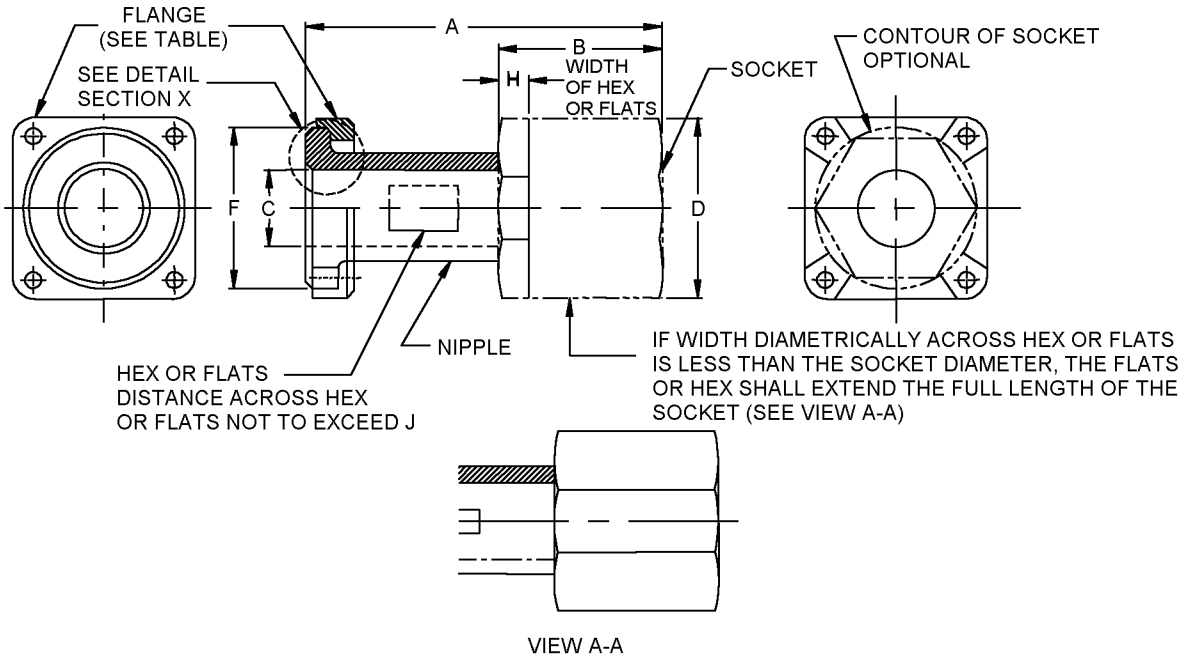



FIGURE 1. Straight fuel hose fitting.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

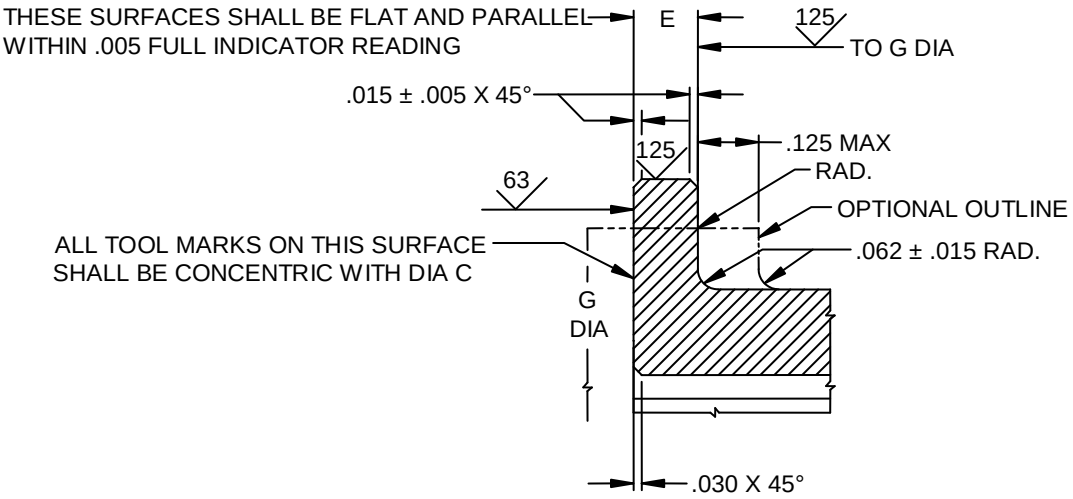


DETAIL SECTION X

| PIN (see note 4) | Nominal tubing and hose size (REF) | Flange PIN | A Max | B Max | C Min | D Max | E +.000 -.005 |
|---|---|---|---|---|---|---|---|
| MS28753D16 | 1 (1.000) | MS20756D16 | 3.141 | 2.000 | .813 | 1.953 | .156 |
| MS28753D20 | 1 ¼ (1.250) | MS20756D20 | 3.141 | 2.000 | 1.047 | 2.313 | .156 |
| MS28753D24 | 1 ½ (1.500) | MS20756D24 | 3.078 | 2.000 | 1.281 | 2.563 | .188 |
| MS28753D32 | 2 (2.000) | MS20756D32 | 3.500 | 2.250 | 1.750 | 3.125 | .188 |
| MS28753D40 | 2 ½ (2.500) | MS20756D40 | 3.891 | 2.500 | 2.250 | 3.625 | .188 |
| MS28753D48 | 3 (3.000) | MS20756D48 | 3.891 | 2.500 | 2.875 | 4.438 | .188 |

| PIN | F +.000 -.005 | G Max | H Min | J Min | Weight lb (Approx) |
|---|---|---|---|---|---|
| MS28753D16 | 1.500 | 1.188 | .375 | 1.343 | .261 |
| MS28753D20 | 1.844 | 1.500 | .500 | 1.656 | .299 |
| MS28753D24 | 2.125 | 1.750 | .500 | 1.906 | .305 |
| MS28753D32 | 2.750 | 2.375 | .625 | 2.531 | .325 |
| MS28753D40 | 3.281 | 2.875 | 1.000 | 3.051 | .607 |
| MS28753D48 | 3.781 | 3.375 | 1.250 | 3.250 | .954 |

| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|---|---|
| .156 | 3.962 | 1.047 | 26.594 | 1.750 | 44.450 | 2.313 | 58.750 | 3.000 | 76.200 | 3.375 | 85.725 |
| .188 | 4.775 | 1.188 | 30.175 | 1.844 | 46.838 | 2.375 | 60.325 | 3.051 | 77.495 | 3.500 | 88.900 |
| .375 | 9.525 | 1.250 | 31.750 | 1.906 | 48.412 | 2.500 | 63.500 | 3.078 | 78.181 | 3.625 | 92075 |
| .500 | 12.700 | 1.281 | 32.537 | 1.953 | 49.606 | 2.531 | 64.287 | 3.125 | 79.375 | 3.781 | 96.037 |
| .625 | 15.875 | 1.343 | 34.112 | 2.000 | 50.800 | 2.563 | 65.100 | 3.141 | 79.781 | 3.891 | 98.831 |
| .813 | 20.650 | 1.500 | 38.100 | 2.125 | 53.975 | 2.750 | 69.850 | 3.250 | 82.550 | 4.438 | 112.725 |
| 1.000 | 25.400 | 1.656 | 42.062 | 2.250 | 57.150 | 2.875 | 73.025 | 3.281 | 83.337 | | |

FIGURE 1. Straight fuel hose fitting – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in Inches. Unless otherwise specified, tolerances: decimals ± .010; angles ± .01°.
2. Metric equivalents are given for information only.
3. Hex flange, see MS20756.
4. Part or Identifying Number (PIN)

FIGURE 1. Straight fuel hose fitting – Continued.

REQUIREMENTS:

Material: Aluminum alloy, see SAE-AS4841.

Hex or flats shall fit standard wrench openings.


Dimensions C, F and G shall be concentric within .010 full indicator reading.

Surface roughness shall be in accordance with ASME-B46.1.

Fittings shall be permanently marked with the applicable MS PIN on an unfinished surface of the nipple.

Remove all burrs and sharp edges. The interior surface of the fitting shall be smooth and free from projections.

Example of PIN: MS28753D16

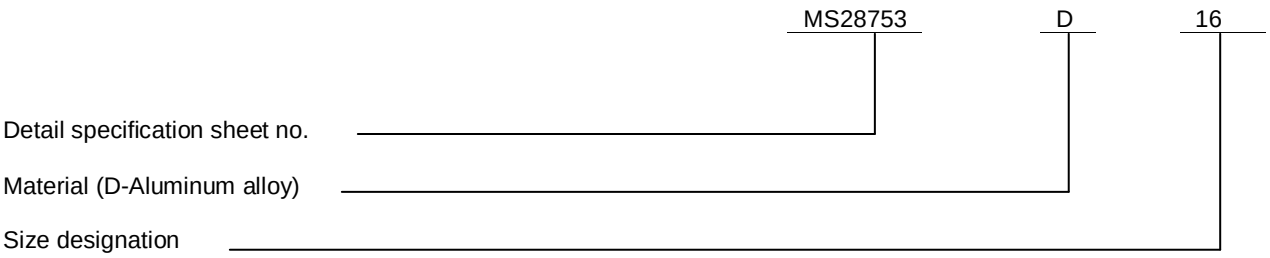


Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. This document references the following:

MS20756
ASME-B46.1
SAE-AS4841



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Air Force – 99
DLA – CC

Preparing activity:
DLA – CC

(Project 4730-2010-065)

Review activity:
Air Force – 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.