
FSC 4810
2915

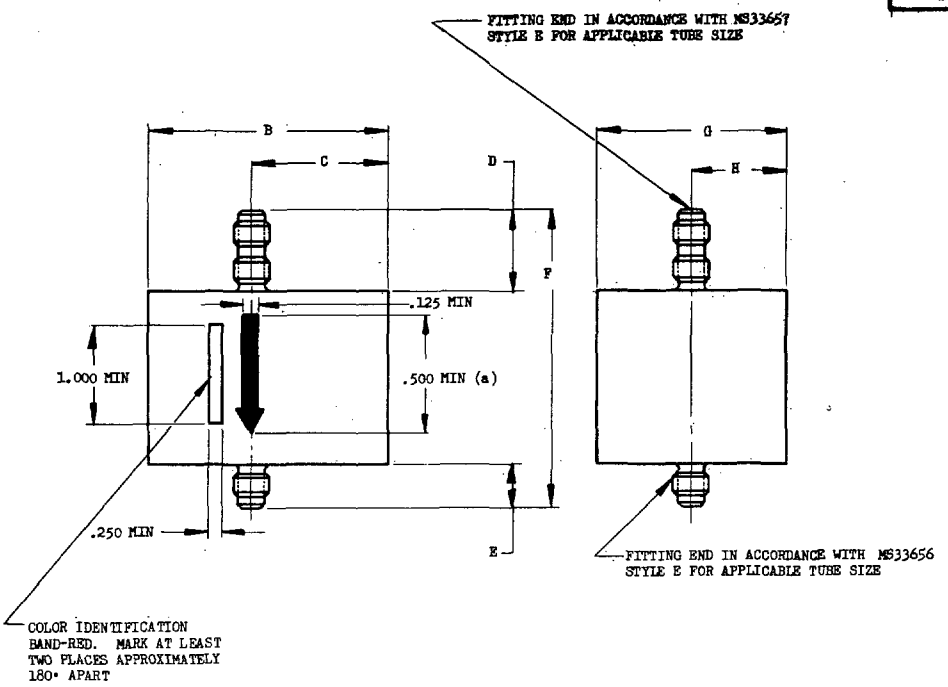


| DASH NO. | MAX WEIGHT LB | TUBING OD | A REF | B MAX | C MAX | D REF | E REF | (D) F +.000 -.050 | G MAX | H MAX |
|---|---|---|---|---|---|---|---|---|---|---|
| -4 | .23 | .250 | 1.156 | 1.812 | 1.312 | 1.016 | .550 | 2.750 | | |
| -6 | .25 | .375 | 1.250 | 1.875 | 1.375 | 1.093 | .556 | 2.937 | 1.125 | .562 |
| -8 | .27 | .500 | | | | 1.250 | .657 | 3.187 | | |
| -12 | .55 | .750 | 1.808 | 2.575 | (D) 1.825 | 1.562 | .864 | 4.234 | (D) 1.520 | (D) .755 |
| -16 | .75 | 1.000 | 2.000 | (D) 2.700 | | | .911 | (D) 4.077 | (D) 1.750 | (D) .875 |
| -20 | 1.00 | 1.250 | 2.433 | (D) 3.200 | | 1.609 | .958 | 5.000 | 2.750 | 1.375 |
| -24 | 1.16 | 1.500 | 2.448 | | | 1.625 | 1.083 | 5.156 | | |
| | | | | | | | | | | |

(a) *BOTH SIDES OF VALVE BODY SHALL BE MARKED WITH AN ARROW INDICATING DIRECTION OF FLOW.* THE ARROWS SHALL BE CAST, ENGRAVED, OR PERMANENTLY METAL STAMPED ON VALVE BODY.

MATERIAL: SEE PROCUREMENT SPECIFICATION.
FINISH: SEE PROCUREMENT SPECIFICATION.
REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES.

DESIGNED FOR USE WITH HYDROCARBON FUEL AT AN OPERATING PRESSURE NOT EXCEEDING 60 PSI.
PROVISIONS SHALL BE MADE FOR LOCKWIRING TO MOUNTING BOSS.
FOR INSTALLATION, CLEARANCE SHALL BE ALLOWED FOR THE MAXIMUM OVERALL DIMENSIONS SHOWN ON THIS STANDARD.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

User activities: USAF - 11, Army - AV, Navy - AS
Review activities: USAF - [illegible], Army - [illegible], Navy - [illegible]

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 7 Sep 54 - REVISED (A) 20 Feb 62 (B) 2 Dec 64 (C) 16 Sep 66 (D) 19 Mar 69

| | | |
|---|---|---|
| P.A. USAF - 11<br>Other Cust<br>Army - AV<br>Navy - AS | TITLE<br>VALVE - FUEL DRAIN, SELF-LOCKING, LINE MOUNTED | MILITARY STANDARD<br>MS29530 |
| PROCUREMENT SPECIFICATION<br>MIL-V-25023 | SUPERSEDES: USAF DRAWING 49F9798-61, -62, AND -63 | SHEET 1 OF 1 |

DD FORM 1 SEP 67 672-1 (Coordinated) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Proj. 2915-0044

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-519/A-6 176

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:02Z
Check the source to verify that this is the current version before use.