
FED. SUP CLASS
5306

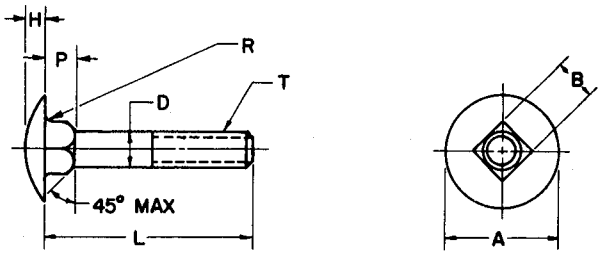

	NOMINAL SIZE		#10 (.1900)	1/4 (.2500)	5/16 (.3125)	3/8 (.3750)
T	THREADS PER INCH		24UNC-2A	20UNC-2A	18UNC-2A	16UNC-2A
D	BODY DIAMETER	MAX	.199	.260	.324	.388
A	HEAD DIAMETER	MAX	.656	.844	1.031	1.219
		MIN	.625	.813	1.000	1.188
H	HEAD HEIGHT	MAX	.114	.145	.176	.208
		MIN	.094	.125	.156	.188
P	DEPTH OF SQUARE	MAX	.125	.156	.187	.219
		MIN	.094	.125	.156	.188
B	WIDTH OF SQUARE	MAX	.199	.260	.324	.388
		MIN	.185	.245	.307	.368
R	FILLET RADIUS	MAX	1/32	1/32	1/32	1/32

L LENGTH	LENGTH TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1	±1/32	1	8	23	39
1-1/4		2	9	24	40
1-1/2		3	10	25	41
1-3/4			11	26	42
2			12	27	43
2-1/4			13	28	44
2-1/2			14	29	45
2-3/4			15	30	46
3			16	31	47
3-1/2			17	32	
4			18		
4-1/2			19		
5			20		

MATERIAL: Steel, Grade 1, or ASTM-A307, Grade A, 55,000 PSI minimum tensile strength.
PROTECTIVE COATING: Cadmium Plate, in accordance with Specification QQ-P-416, Type II, Class 3. Zinc Plate, in accordance with Specification QQ-Z-325, Type II, Class 3.
THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H-28.
THREAD LENGTH (MIN): (Extreme point to last complete thread) shall be two diameters, plus 1/4 in. for bolts up to and including 6 in. long. Bolts too short for formula thread length, thread will extend as close to the neck as practicable but in no event shall the full thread be more than 2 1/2 pitches from the neck.
DIMENSIONS: All dimensions are in inches, unless otherwise specified.
PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35752-1.
NOTES: (1) Bolts shall be free from defects such as loose or hanging burrs, and scale, that would affect their serviceability.
(2) Referenced documents shall be of the issue in effect on date of invitations for bid.
(3) This standard takes precedence over documents referenced herein.

(B) CANCELLED AFTER 20 MAY 1974
NO LONGER REQUIRED - SEE MS35751

APPROVED 30 OCTOBER 1956 REVISED (A) 13 SEPT 1966 (B) 20 MAY 1974

REVIEWER: AV, EA, IS
USER: AT, MC, ME, MU, OS, PA, WT, YD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC	TITLE	MILITARY STANDARD
Other Cust 82	BOLT, SQUARE NECK, TRUSS HEAD, (STEP) STEEL, CADMIUM OR ZINC PLATED, UNC-2A	MS35752
PROCUREMENT SPECIFICATION FF-B-584	SUPERSEDES: BAKX series	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.