
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVIEWER ACTIVITIES: ARMY - MD, NAVY - AS, AIR FORCE - 70, 82

USER ACTIVITIES: ARMY - ME, NAVY - MS, AIR FORCE - 03, 71

FED. SUP CLASS
6640

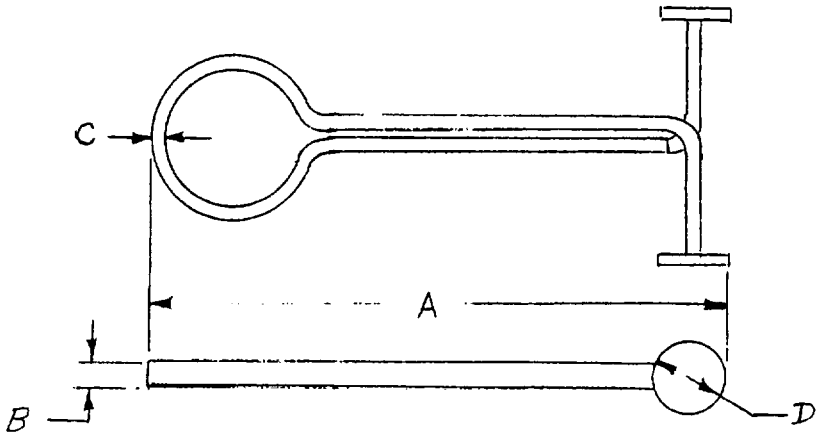

PART NUMBER	MAX OD TUBING ACCOMMODATED (IN.)	A OVERALL LENGTH (IN.)	B WIDTH (IN.)	C THICKNESS (IN.)	D FINGER DISK DIAMETER (IN.)
MS36006-1	0.625	3.25 to 3.50	0.312	0.093	0.50

MATERIAL: Flat brass spring wire in accordance with Federal Specification QQ-W-321, Composition 2, 6, 7, or 8.

FINISH: Nickel plating in accordance with Federal Specification QQ-N-290, Type V, Class 1B.

DESIGN: Edges of jaws shall be slightly rounded to prevent injury to rubber tubing. Jaws shall be in close contact for a distance of approximately one inch. Finger disk shall be riveted or soldered and shall be approximately 0.02 inch in thickness.

NOTES:
1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
2. For design feature purposes, this standard takes precedence over procurement document referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. FSCM: 22527, 64484, 87664.

APPROVED 23 Dec 1959 REVISED (A) 15 Dec 1967 (B) 4 Dec 1985

(B) ENTIRE STANDARD REVISED

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
EA		CLAMP, RUBBER TUBING, SHUTOFF PINCHCOCK TYPE, MOHR DESIGN	MS 36006
Other Cust MS 99			
Procurement Specifications NNN-C-435	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NUMBER 6640-1310

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:32Z
Check the source to verify that this is the current version before use.