
FED. SUP CLASS
4730

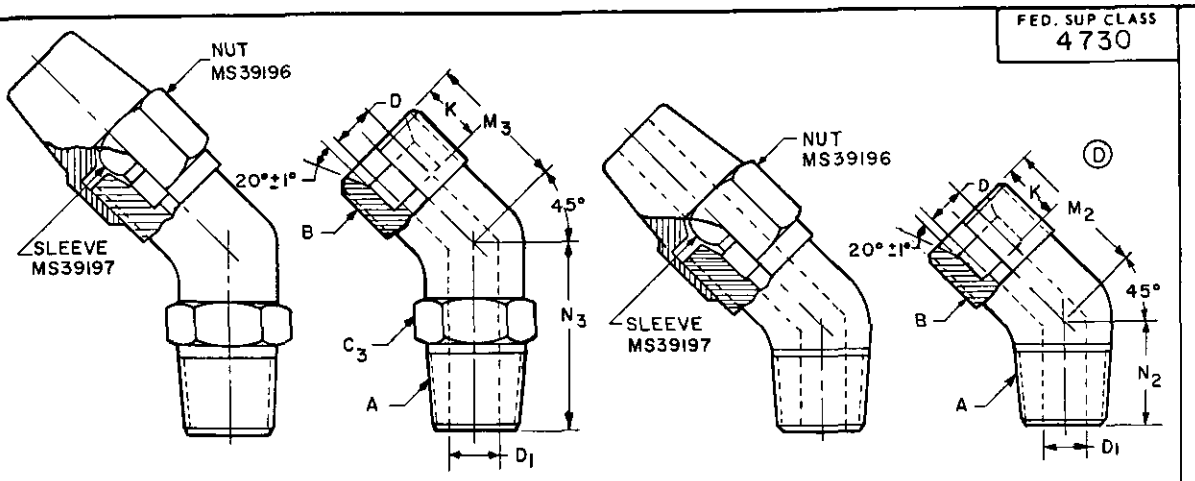

LONG
(CASTINGS)

REGULAR
(FORGINGS AND EXTRUSIONS)

TABLE I

ELBOW, LONG - INACTIVE FOR NEW DESIGN AFTER 30 DECEMBER 1971

DASH NUMBER ASSY	DASH NUMBER BODY	TUBE O.D.	A PIPE THREAD NPTF	B STRAIGHT THREAD	C_3 HEX FLAT NOM	D DIA DRILL	D_1 DIA DRILL	K	M_3 ±.03	N_3 ±.03
1	21	3/8	1/4	17/32-24UNS-2A	9/16	0.312	0.312	0.31	0.60	0.91
2	22	3/8	3/8	17/32-24UNS-2A	11/16	0.312	0.406	0.31	0.62	0.83
3	23	1/2	3/8	11/16-20UN-2A	11/16	0.406	0.406	0.44	0.71	0.91
4	24	5/8	1/2	13/16-18UNS-2A	7/8	0.531	0.531	0.44	0.81	0.98

TABLE II

ELBOW, REGULAR

DASH NUMBER See note 9 ASSY	DASH NUMBER See note 9 BODY	TUBE O.D.	A PIPE THREAD NPTF	B STRAIGHT THREAD	D DIA DRILL	D_1 DIA DRILL	K	M_2 ±.03	**N_2 ±.03
6	26	3/8	1/4	17/32-24UNS-2A	0.312	.312	0.31	0.72	0.86
7	27	1/2	3/8	11/16-20UN-2A	0.406	.406	0.44	0.85	0.95
8	28	5/8	1/2	13/16-18UNS-2A	0.531	.531	0.44	0.94	1.17

** Use of hexagon on forged shapes, where N_2 length permits, shall be optional with the manufacturer.

NOTES:
1. MATERIAL: Brass, in accordance with procurement specification.
2. PROTECTIVE COATING: None.
3. DIMENSIONS AND TOLERANCES: Dimensions and tolerances not shown shall be in accordance with the SAE Standard for Spherical Sleeve (Compression) Tube Fittings (SAE J246).
4. THREADS: Threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
   A. For complete item (with nut and sleeve), use the MS number, plus the assembly dash number. Example: MS39185-6.
   B. For the body only, use the MS number, plus the body dash number. Example: MS39185-26
6. Reference documents shall be of the issue in effect on date of invitations for bid.
7. For design purposes, this standard takes precedence over procurement documents referenced herein.
8. The illustration is for identification and is not intended to restrict designs or shapes not dimensioned.
9. Previously inactive bodies, dash numbers 26, 27 and 28, are now active for design only; normally for replenishment the complete assembly should be requisitioned.

Ⓔ CANCELLED–For Procurement Use SAE J246

REVIEWER: CG, CS, ME, MI
USER: AT, AV, ER, GL, MC

APPROVED 3 APR 62 REVISED Ⓐ 27 FEB 67 Ⓑ 12 NOV 68 Ⓒ 30 DEC 71 Ⓓ 10 DEC 76 Ⓔ 24 OCT 86

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AR Other Cust	TITLE ELBOW, PIPE TO TUBE, 45 DEGREE, MALE PIPE END, FOR AIR LINES - SPHERICAL SLEEVE	MILITARY STANDARD MS39185
PROCUREMENT SPECIFICATION MIL-F-45911	SUPERSEDES: CFCX4	SHEET 1 OF 1

DD FORM 1 SEP 87 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-0835

AMSC/NA

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 — 704-036/45890

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:47Z
Check the source to verify that this is the current version before use.