

FED. SUP CLASS
4720



HOSE END VIEW

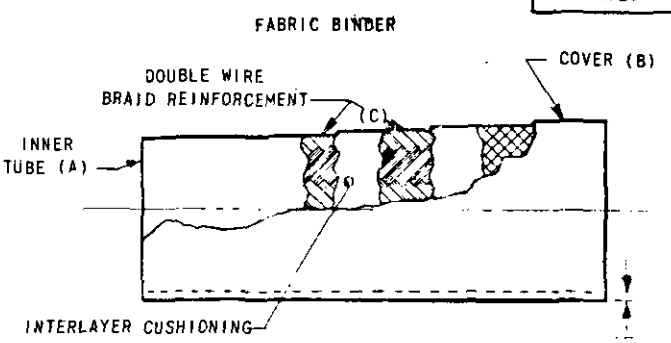

NOMINAL HOSE SIZE I.D.	DASH NO.	A INNER TUBE		B COVER		B COVER ALTERNATE		C WIRE REINFORCEMENT		T COVER THICKNESS RANGE		MAXIMUM WORKING PRESSURE
		INSIDE DIAMETER	I.D. TOLERANCE	OUTSIDE DIAMETER	O.D. TOLERANCE	OUTSIDE DIAMETER	O.D. TOLERANCE	OUTSIDE DIAMETER	O.D. TOLERANCE	MAX	MIN	
1/4	-4	0.250	+0.023 -0.008	0.687	±0.031	0.598	±.027	0.500	±0.023	0.060	0.031	5,000
3/8	-6	0.375	+0.023 -0.008	0.843	±0.031	0.754	±.027	0.656	±0.023	0.060	0.031	4,000
1/2	-8	0.500	+0.031 -0.015	0.968	±0.031	0.874	±.031	0.781	±0.031	0.060	0.031	3,500
3/4	-12	0.750	+0.031 -0.015	1.250	±0.031	1.156	±.031	1.063	±0.031	0.060	0.031	2,250
1	-16	1.000	+0.040 -0.015	1.562	±0.046	1.500	±.031	1.375	±0.031	0.085	0.042	2,000
1-1/4	-20	1.250	+0.047 -0.015	2.000	±0.062	1.867	±.039	1.750	±0.047	0.100	0.050	1,625
1-1/2	-24	1.500	+0.047 -0.015	2.250	±0.062	2.	039	2.000	±0.047	0.100	0.050	1,250
2	-32	2.000	+0.047 -0.015	2.750	±0.062		±.039	2.500	±0.047	0.100	0.050	1,125

NOMINAL HOSE SIZE	CONCENTRICITY BETWEEN BORE (A) AND O.D. (B)	BORE (A) AND REINFORCEMENT O.D. (C)
1/4, 3/8, 1/2	.040 TIR	0.030 TIR
1, 1-1/4	0.050 TIR	0.040 TIR

Ⓐ

Ⓑ CANCELLED AFTER 25 OCTOBER 1978 for future procurement use MIL-H-52471/5

NOTES:

1. PRESSURES IN POUNDS PER SQUARE INCH (PSI)
2. DIMENSIONS IN INCHES.
3. INSIDE AND OUTSIDE DIAMETERS ARE MEASURED AT LEAST 2 INCHES FROM END.
4. Ⓐ THIS HOSE CONFORMS TO MIL-H-52471, TYPE B AND MUST BE LISTED ON QPL 52471
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. Ⓐ PART NO. EXAMPLE: MS39263-4B INDICATES 1/4-INCH NOMINAL SIZE DOUBLE WIRE BRAID HOSE.

REVIEW ACTIVITIES:
USER ACTIVITIES: MI, MU, WC, SH, 82

APPROVED 12 NOV 1965 REVISED (A) 28 DECEMBER 1970 (B) 25 October 1978

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ARMY-ME Other Cust	TITLE HOSE, RUBBER: HYDRAULIC, PRESSURE TYPE, DOUBLE WIRE BRAID REINFORCEMENT	MILITARY STANDARD MS 39263
PROCUREMENT SPECIFICATION MIL-H-52471	SUPERSEDES:	SHEET | OF |

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OBSOLETE

Source: https://assist.dla.mil - Downloaded: 2026-03-25T17:50Z
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1978—603-022/5287