FED. SUP CLASS
4730

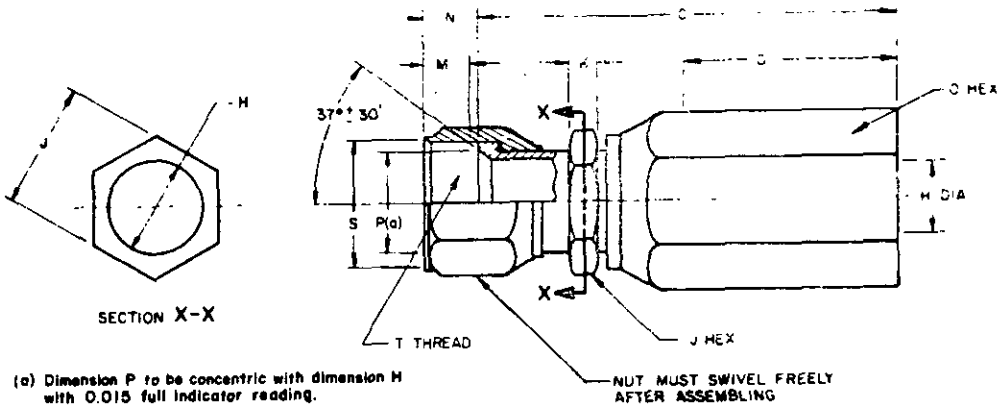


TABLE I. Dimensions for 37° flare, swivel nut, straight adapters.

Size (Nom)	Dash No.	Hose Dash No.	Hose O.D. Ref.	C Max.	D Min.	H Min.	J Max.	K Min.	M Min.	N Min.	O Max.	P Dia.	S Dia.	T CL-2B
1	-20	-20	1-1/4	5.00	3.11	1.00	2.00	0.41	0.56	0.64	2.25	1.41	1.53	1-5 8 -20
	-24	-24	1-1 2	5.34	3.10	1.23	2.25	0.41	0.66	0.74	2.63	1.63	1.78	1-7 8 -20

Maximum working pressure of adapters.

1-1/4	1-1 2
3000	2500

TAB.. for swivel nut.

Dash No.	O.D.	ounds) Max.
-20	1-1/4	
-24	1-1/2	

A CANCELLED AFTER 25 JUNE 1980
USE MIL-F-52525/18.

NOTES:
1. Material shall be steel or malleable iron.
2. The adapters shall be zinc plated in accordance with QQ-Z-325, Typ. ' in accordance with QQ-P-416, Class 3, Type II, except the embrittlement .tional.
3. Threads shall be in accordance with NBS Handbook H-28, except threads th.
4. Swivel nut method of fabrication and assembly is optional.
5. All dimensions are in inches.
6. Marking shall include the manufacturer's name or trade mark, the size of the adapte. "R-X".
7. Pressures are in pounds per square inch.
8. Proof pressure shall be that pressure which is equal to twice the maximum working pressu. .ing pressure X2).
9. Burst pressure shall be that pressure which is not less than four times the maximum working pressure (working pressure X4).
10. Adapters are for use with four spiral light wire reinforcement hose conforming to MIL-H-52471, Type E.
11. Installation designs shall provide for the maximum adapter dimensions specified for the size and type.
12. The MS part number consists of the MS sheet number, plus the dash numbers. Example: MS -20 -20. The MS indicates a straight adapter with swivel nut. The -20 indicates the nominal termination size (in increments of 1/16 inch). The next -20 indicates the hose size 1-1/4 inch.
13. Reference documents shall be of the issue in effect on date of invitation for bids or request for proposal.
14. For design feature purposes this standard takes precedence over procurement documents referenced herein.

User activities:
Army - MU, WC
Air Force - 99

Review activities:
Army - GL
DSA - CS

A 25 JUNE 1980
APPROVED 4 NOVEMBER 1976 REVISED

P.A. ME Other Cust	TITLE Adapter, straight, tube to hose, field attachable (reusable), hydraulic, screw-on pressure type, female, swivel, 37° flare, four spiral light wire reinforcement hose	MILITARY STANDARD MS39357
PROCUREMENT SPECIFICATIONS MIL-A-52525	SUPERSEDES:	Page 1 of 1

DD FORM 672-1 PREVIOUS EDITION OF THIS FORM IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026/0.23547:52Z
Check the source to verify that this is the current version before use.