MIL-E-1/73A
23 April 1965
SUPERSEDING
MIL-E-1/73
5 February 1953

MILITARY SPECIFICATION SHEET

ELECTRON TUBE, RECEIVING

TYPE 26Z5W

This specification sheet forms a part of the latest issue of Military Specification MIL-E-1.

DESCRIPTION: Twin diode

Outline --- 6-7

Base --- E9-1

Envelope --- T6-1/2

Cathode --- Coated unipotential

Base connections:

Pin No.	---	1	2	3	4	5	6	7	8	9
Element	---	2p	nc	2k	h	h	1p	nc	1k	hct

ABSOLUTE-MAXIMUM RATINGS:

Parameter:	Ef	epx	Epp/p	ib/p	Io	i surge	RL	CL	Ehk	TE	Alt
Unit:	V	v	Vac	ma	mAdc	a	Ohms	µf	v	°C	ft
Maximum:	30.5	1,375	---	300	110	1.0	---	---	450	170	(see note 8)
Minimum:	22.5	---	---	---	---	---	---	---	---	---	---
TEST CONDITIONS:	26.5	---	400	---	---	---	3,650	8	---	---	---

REQUIREMENT OR TEST:

GENERAL

3.2 Qualification - Required

E-50.2 Holding period

E-50.3 Preheating

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 20260-15T12:52Z
Check the source to verify that this is the current version before use.

METHOD OR PARAGRAPH	REQUIREMENT OR TEST	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Qualification							
1031	Variable-frequency vibration	No voltages	---	---	---	---	---	---
1031	Vibration-fatigue test	See note 2	---	---	---	---	---	---
	Quality conformance inspection, part 1							
1353	† Operation of rectifiers	See note 3	0.65	II	Io	100	---	mAdc
1231	Emission (diode 1)	E2b = 0; E1b = 40 Vdc	0.65	II	I1s	160	---	mAdc
1231	Emission (diode 2)	E1b = 0; E2b = 40 Vdc	0.65	II	I2s	160	---	mAdc
1201	Shorts and discontinuity detection	See note 4	0.4	II	---	---	---	---
Appendix D, 20(a), 30	Visual and mechanical inspection criteria		---	---	---	---	---	---
	Quality conformance inspection, part 2							
1211	Insulation of electrodes		6.5	L6	R	10	---	Meg
1301	Heater current (1)		6.5	L6	If	180	220	mA
1336	Heater-cathode leakage	Ehk = Eo (see note 3)	6.5	L6	Ihk	---	150	μAdc
1041	Shock	G = 750 (see note 2)	6.5	L6	---	---	---	---
1031	Low-frequency vibration	No voltages	6.5	L6	---	---	---	---
Appendix D, 20(b)	Dimensions	Outline 6-7; dimensions A thru E	6.5	L6	---	---	---	---
1105	Permanence of marking		---	---	---	---	---	---
---	Bump	See note 1	2.5	I	---	---	0.3	v


METHOD OR PARAGRAPH	REQUIREMENT OR TEST	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSP LEVEL OR CODE	ALLOWABLE DEFECTIVES PER CHARACTERISTIC 1 ST SAMPLE	ALLOWABLE DEFECTIVES PER CHARACTERISTIC COMBINED SAMPLES	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 3									
1506	Heater-cycling life test	Ef = 32 V; Ehk = -450 Vdc; Eb = 0 (see note 5)	---	---	---	---	---	---	---	---
4.7.3	Heater-cycling life-test end points	Heater current (1)	---	---	---	---	If	180	220	mAdc
		Heater-cathode leakage	---	---	---	---	Ihk	---	150	μAdc
		Operation of rectifiers	---	---	---	---	Io	88	---	mAdc
		Total defectives	---	---	0	1	---	---	---	---
4.7 and 1501	Intermittent life test (1,500 hours)	Group B (see note 6)	---	---	---	---	---	---	---	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:52Z
Check the source to verify that this is the current version before use.

METHOD OR PARAGRAPH	REQUIREMENT OR TEST	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSP LEVEL OR CODE	ALLOWABLE DEFECTIVES PER CHARACTERISTIC		SYMBOL	LIMITS		UNIT
					1 ST SAMPLE	COMBINED SAMPLES		MIN	MAX	
	Quality conformance inspection, part 3 -Continued									
4.7.3	Intermittent life-test end point (1,500 hours)	Operation of rectifiers	---	---	---	---	Io	88	---	mAdc
1136	Container drop (periodic check)	See note 7	---	---	---	---	---	---	---	---

NOTES:

1. Test in circuit as shown below. The tube under test shall be tapped three times on each of two planes approximately 90° apart. Sharp blows shall be delivered with a mallet consisting of a 1/8-inch diameter fiber rod inserted and glued into the small end of a No. 8 high quality cork, 1-1/16 inches in length and having a large diameter of 7/8 inch and a small diameter of 11/16 inch. The overall length of rod and cork shall be 6 inches. Any vertical deflection of the oscilloscope trace, exceeding 0.3 v, shall indicate a defective tube.

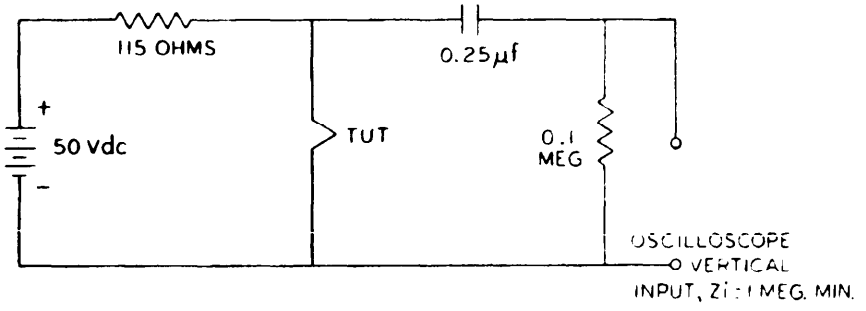

2. Post-shock and fatigue-test end points:

Heater-cathode leakage	250 µAdc maximum
Operation of rectifiers	94 mAdc minimum

3. In a full-wave circuit, adjust Zp/p such that a tube having Etd = 22 Vdc at 100 mAdc per plate gives Io = 110 mAdc.

4. Paragraph 3.1 of method 1201 shall apply.

5. Double sampling plan. First sample = 20, second sample = 20.

6. In life-test operation, the values of RL and CL are approximate and shall be adjusted initially to give Io equal to, or greater than, 110 mAdc with ib equal to, or greater than, 300 ma with a tube having Etd = 22 Vdc at 100 mAdc per plate. Ehk = Eo.

7. This test is not required for qualification approval.

8. See 6.5.2.3 for altitude (low-pressure) rating, and 6.5.2.4 for altitude, maximum-peak voltage.

Custodians:
Army - EL
Navy - SH
Air Force - 11

Review activities:
Army - EL
Navy - SH
Air Force - 11, 17, 85

User activities:
Army - MU
Navy - WP, MC, CG
Air Force - None

Preparing activity:

Navy - SH

(Project 5960-2063)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:52Z
Check the source to verify that this is the current version before use.