MILITARY SPECIFICATION SHEET

ELECTRON TUBE, GAS SWITCHING

TYPE 1B23

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: TR, separate cavity, frequency range 936.5 to 955.5 MHz

ABSOLUTE RATINGS:

Parameter:	Open circuit ignition voltage	Ii	Alt
Unit:	Vdc	μAdc	ft
Maximum:	-1,000	200	10,000
Minimum:	-800	---	---

PHYSICAL CHARACTERISTICS: See figure 1

TEST CONDITIONS:

Parameter:	F	Ii
Unit:	MHz	μAdc
	950	200

GENERAL:

Qualification - Required

Source: https://assist.dla.mil -- Downloaded: 202610-15T12:47Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	SYMBOL	LIMITS		UNIT
					MINIMUM	MAXIMUM	
	Quality conformance inspection, part 1	7					
---	Water-vapor content	5		Po2/Po1	---	0.55	---
4401	Ignitor ignition time	-	Ebb = -800 Vdc; R 3.25 Meg	t	---	5.0	sec
4406	Ignitor voltage drop	-	Ii = 100 μAdc	Eid	375	525	Vdc
4416	Insertion loss	3		Li	---	1.6	dB
---	Tuning	1, 8		F	936.5	955.5	MHz
4478	High-level protection	4		---	---	100	%
	Quality conformance inspection, part 2						
4021	Degradation due to vibration	-		---	---	---	---
4101	Dielectric material strain	-		---	---	---	---
---	Ignitor current	2		Ii	---	70	μAdc
4421	Ignitor interaction	-	Ii 200 μAdc	ΔLi	---	0.2	dB
	Quality conformance inspection, part 3						
---	Life test	6	Group C	t	500	---	hrs
---	Life-test end points:						
4421	Ignitor interaction	-	Ii 200 μAdc	ΔLi	---	0.2	dB
---	Water-vapor content	5		Po2 Po1	---	0.8	---

NOTES:

1. This measurement shall be made with the tube mounted in test cavity according to Drawing 162-JAN.
2. No tube shall require more than the stated maximum ignitor current to prevent relaxation oscillations when tested in the standard circuit.
3. This measurement shall be made in test cavity according to Drawing 162-JAN. With the cavity calibrator in position, the cavity shall be tuned to resonance and the relative transmitted power level noted. With the tube inserted, the cavity shall then be tuned to resonance and the transmitted power noted. The dB loss in transmitted power due to the insertion of the tube shall not be more than the specified amount.
4. When the tube is fired by the application of high power in cavity according to Drawing 162-JAN which is at resonance, the transmitted power obtained shall be less than that of a standard tube filled with pure hydrogen to a pressure of 25 mmHg. The power level at the input shall be sufficient to fire the rf gap of the tube and to insure that the measurement is being made on the flat part of the "power in the gap versus leakage power" characteristic. If the main discharge gap does not fire, it is caused to be fired by a short application of ignitor voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:47Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

5. With the tube operating as outlined in note 4, a small portion of the tube envelope shall be cooled by the application of solid CO_2. The ratio of the minimum reading of the output meter (Po2) to that obtained before the application of solid CO_2 (Po1) shall be less than the given value, and the final reading shall be less than the initial one.

6. The specified life is based on ignitor life only. This will be reduced if the tube is operated at full rated rf conditions.

7. Unless otherwise specified, the AQL for all tests listed under quality conformance inspection, part 1, shall be 1.0, inspection level II.

8. The tube shall be mounted in the specified external cavity and placed between a matched generator and detector. The signal generator frequency shall be varied to obtain the resonant frequency of the tube and cavity as evidenced by a pronounced peak at the output indicator. The value of this resonant frequency shall be within the limits specified.

9. Changes from previous issue. Revision letters are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Air Force - 11, 17
DSA - ES


User activities:
Army - WC
Navy - AS, OS, MC, CG, SH

Preparing activity: Navy - EC

Agent: DSA - ES

(Project 5960-2030)

Source: https://assist.dla.mil -- Downloaded: 202610-15T12:47Z
Check the source to verify that this is the currentversion before use.

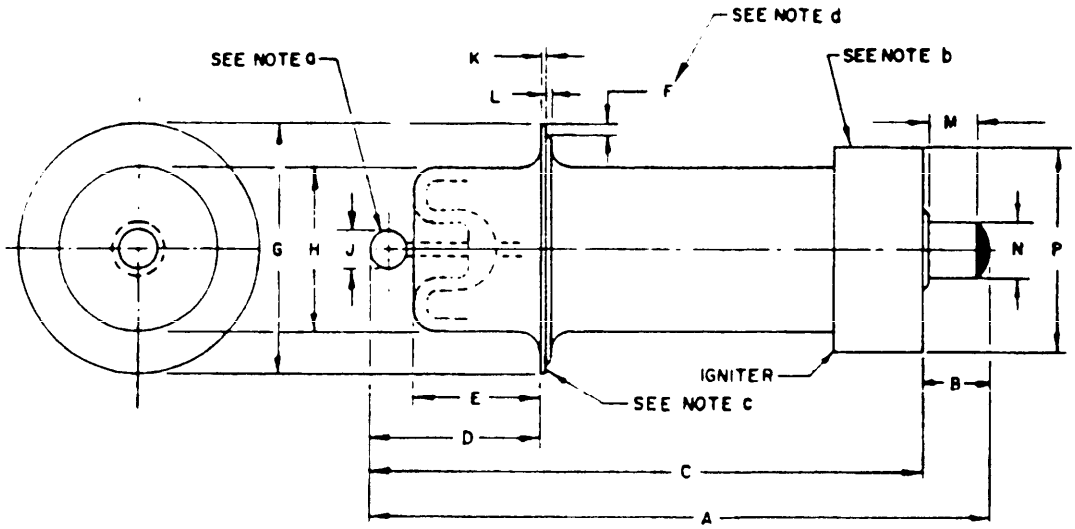

LTR	DIMENSIONS				NOTES
	INCHES		MILLIMETERS		
	MIN	MAX	MIN	MAX	
	Qualification inspection				
A	2.609	2.984	66.27	75.79	
B		.313		7.95	
K		.008		.20	
L		.032		.81	
Quality conformance inspection, part 1					
C	2.297	2.672	58.34	67.87	
D	.906	.969	23.01	24.61	
E	.656	.781	16.66	19.84	
F	.047		1.19		
Quality conformance inspection, part 2					
G	1.109	1.141	28.17	28.98	
H	.688	.813	17.48	20.65	
J	.185	.189	4.70	4.80	
M	.220		5.59		
N	.246	.254	6.25	6.45	
P	.896	.930	22.76	23.62	

NOTES:
a. The H-F electrode shall be concentric with the disc electrode within .018(.46 mm).
b. The base shall be concentric with the disc electrode within .040(1.02 mm).
c. Contact disc external surfaces and H-F electrode shall be gold plated min 10 msi or silver plated 15 msi on external surfaces (edges of disc need not be plated).
d. Contact portion of disc measured radially which shall be free from splits or tears, shall be smooth and shall be perceptably flat.

Source: https://assist.dla.mil -- Downloaded: 202610-15T12:47Z
Check the source to verify that this is the currentversion before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-15T12:47Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 68 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N 0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 202640-15T12:47Z
Check the source to verify that this is the current version before use.