MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MICROWAVE, NEGATIVE GRID

TYPE 2C36

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

DESCRIPTION: Triode, planar

See figure 1

Mounting position: Any

Weight: 0.4 ounce nominal

ABSOLUTE RATINGS: UHF oscillator, anode pulse modulated

Parameter:	(A) F1	Ef	Eb	(A) Ib	eb	Pp	tk	T (seal)	Rk	Du	tp
Unit:	MHz	V	Vdc	mAdc	v	W	sec	°C	Ohms	---	μs
Maximum:	1,200	6.6	350	16.0	1,500	5.0	---	175	---	0.004	2.0
Minimum:	---	6.0	---	---	---	---	---	---	---	---	---
TEST CONDITIONS:	---	6.3	180	12.0	---	---	300	---	400	---	---

GENERAL:

Qualification - Required

Holding period (MIL-STD-1311) t = 168 hours

(A) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:48Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1							
1301	Heater current		0.65	II	If	380	420	mA
1256	Electrode current (1) (anode)		0.65	II	Ib	8.0	16.0	mAdc
1256	Electrode current (2) (anode)	Ec = -28 Vdc; Rk = 0	0.65	II	Ib	---	10.0	µAdc
(A) 1306	Transconductance		0.65	II	Sm	3,350	5,650	µmhos
1231	Emission	(Eb = Ec)/Ik = 30 mAdc; Rk = 0 (see note 2)	0.65	II	Etd	---	10	Vdc
1231	Peak emission	eb = ec = 100 v; tp = 3.0 µs; prr = 500	0.65	II	is	800	---	ma
	Quality conformance inspection, part 2							
---	Power output	F = 1,075 MHz ± 25 MHz; eb = 1,000 v; prr = 2,000; tp = 1.0 µs; cavity in accordance with 171-JAN,	6.5	S3	po	125	---	w
1031	Vibration	No voltages	6.5	S3	---	---	---	---
1266	Total grid current		6.5	S3	Ic	0	-1.0	µAdc
1211	Insulation of electrodes	Ef = 6.3 V; Eg to all = 100 Vdc	6.5	S3	R	25	---	Meg
(A) 1316	Amplification factor		6.5	S3	Mu	15	35	---
1331	Direct-interelectrode capacitance	Test in cavity in accordance with 170-JAN,	6.5	S3	Cgp Cgk Cpk	1.75 1.05 0.28	2.05 1.35 0.48	pF pF pF
(A) ---	Torque	Applied between anode and cathode without shock (see note 3)	6.5	S3	---	10	---	lb-in.
(A) ---	Seal	T = 175° C (min); t = 16 hours (min) (see note 1)	6.5	S3	---	---	---	---
	Quality conformance inspection, part 3							
---	Life-test provisions	Group C; power output t = 250 hours	---	---	---	---	---	---
---	Life-test end point	Power output	---	---	po	100	---	w

Source: https://assist.dla.mil -- Downloaded: 202610-15T12:48Z
Check the source to verify that this is the current version before use.

NOTES:

1. This test shall consist of subjecting the tube to the temperature and minimum time specified, after which the tube shall be tested for heater current and the value shall be within 380 to 420 mA.

2. May be made at constant voltage as an alternate with Eb/-Ec = 10 Vdc; Rk = 0; Is = 35 mAdc (min).

3. After subjection to the torque specified, the tube shall be tested for total grid current and the value shall not exceed -1.2 μAdc.

Custodians:
Army - EL
Navy - EC
Air Force - 85


Review activities:
Army - EL
Navy -
Air Force - 11, 85
DSA - ES

User activities:
Army - ME
Navy - AS, OS, MC, CG , SH
Air Force - 19

Preparing activity:
Navy - EC

(Project 5960-2350)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:48Z
Check the source to verify that this is the current version before use.

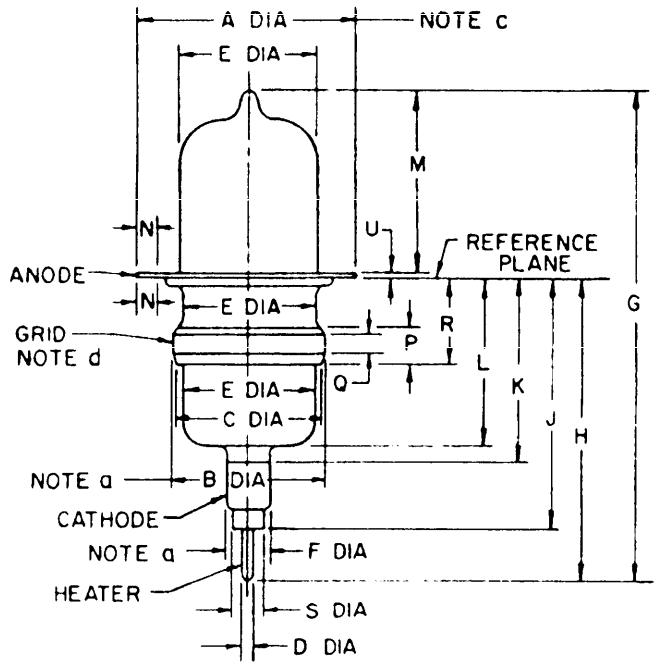

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses		Notes
	Minimum	Maximum	
Quality conformance inspection, part 2			
A	.995 (25.27)	1.005 (25.53)	a, c
B	.740 (18.80)	.750 (19.05)	a, c
C	.695 (17.65)	.725 (18.42)	
D	.045 (1.14)	.055 (1.40)	a, b
E	-- --	.660 (16.76)	a
F	.197 (5.00)	.207 (5.26)	a, b
G	-- --	2.375 (60.33)	
H	1.405 (35.69)	1.475 (37.47)	
J	1.200 (30.48)	1.230 (31.24)	
K	-- --	.900 (22.86)	
L	-- --	.815 (20.70)	
M	-- --	.887 (22.53)	
N	.080 (2.03)	-- --	b
P	.175 (4.45)	.195 (4.95)	
Q	.090 (2.29)	-- --	b
R	.375 (9.53)	.425 (10.80)	
S	-- --	.190 (4.83)	
U	.007 (.18)	.013 (.33)	

NOTES:
a. Ref dia 'F' to be concentric with respective diameters as follows: Dia 'A' .040 (1.02 mm) FIR, Dia 'B' .030 (.76 mm) FIR, Dia 'D' .030 (.76 mm) FIR, Dia 'E' .060 (1.52 mm) FIR. Full indicator reading includes out of roundness and tilt of components.
b. Areas designated by dimensions 'D', 'F', 'N' and 'Q' must be clean and free from glass.
c. Ref dia 'A' to be concentric with diameter 'B' within .030 (.76 mm) FIR.
d. This surface to be flat within .005 (.13 mm).

FIGURE 1. Outline drawing of electron tube type 2C36.

Source: https://assist.dla.mil -- Downloaded: 202610-15T12:48Z
Check the source to verify that this is the currentversion before use.