INCH-POUND
MIL-DTL-23971/1A
23 April 2002
SUPERSEDING
MIL-P-23971/1
2 December 1977

DETAIL SPECIFICATION SHEET

POWER DIVIDERS, 4 PORT QUADRATURE, SOLDER TERMINALS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the power dividers described herein shall consist of this specification sheet and MIL-DTL-23971.

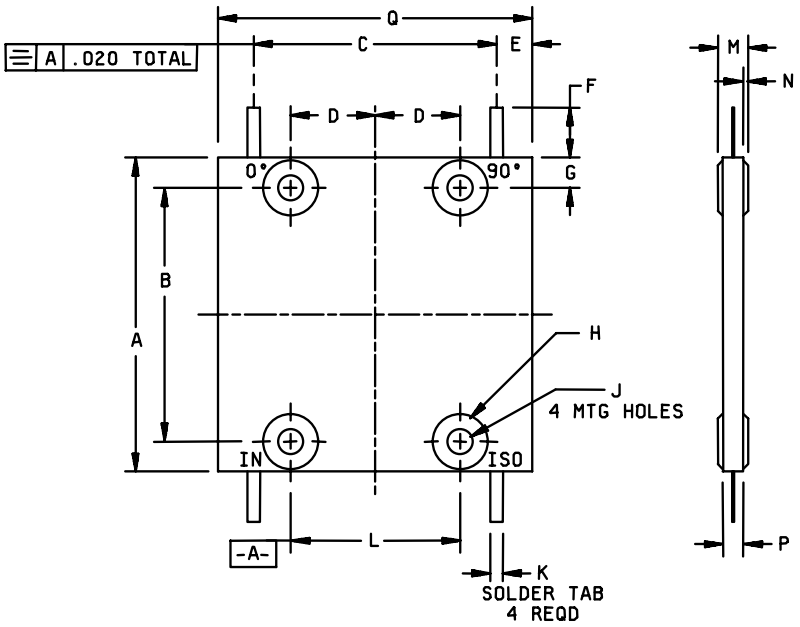

FIGURE 1. Dimensions and configuration, P/N 001 and 002.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:32Z
Check the source to verify that this is the current version before use.

	Dimensions			
	Inches		Millimeters	
	Max	Min	Max	Min
A	1.27	1.23	32.3	31.2
B	1.020	1.000	25.91	25.40
C	.981	.951	24.92	24.16
D	.347	.327	8.81	8.31
E	.17	.11	4.3	2.8
F	.25	.15	6.4	3.8
G	.130	.110	3.30	2.79
H	.240 dia	N/A	6.10 dia	N/A
J	.110 dia	.90 dia	2.79 dia	22.9 dia
K	.0505	.0495	1.28	1.26
L	.684	.664	17.4	16.9
M	.12	N/A	3.0	N/A
N	.025	N/A	.64	N/A
P	.095	.065	2.4	1.7
Q	1.27	1.23	32.3	31.2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.02 (.5 mm) for two place decimals.

FIGURE 1. Dimensions and configuration, P/N 001 and 002 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:32Z
Check the source to verify that this is the current version before use.

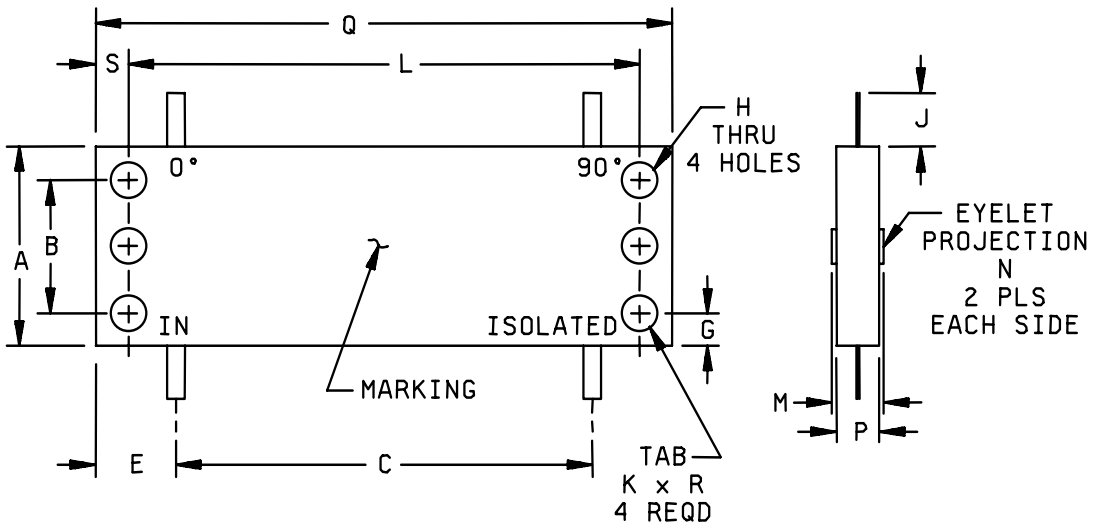

	Dimensions			
	Inches		Millimeters	
	Max	Min	Max	Min
A	.58	.54	14.7	13.7
B	.385	.365	9.78	9.27
C	1.19	1.15	30.2	29.2
D	N/A	N/A	N/A	N/A
E	.24	.20	6.1	5.1
F	N/A	N/A	N/A	N/A
G	.11	.07	2.8	1.8
H	.105 dia	.093 dia	2.67 dia	2.36 dia
J	N/A	.15	N/A	N/A
K	.0505 wide	.0495 wide	1.28 wide	1.26 wide
L	1.447	1.427	36.75	36.25
M	.144	.124	3.66	3.15
N	.007	N/A	0.2	N/A
P	.120	N/A	.120	N/A
Q	1.64	1.60	41.7	40.6
R	.0055 Thk	.0045 Thk	.14 Thk	.11 Thk
S	.11	.07	2.8	1.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.02 (.5 mm) for two place decimals.

FIGURE 2. Dimensions and configuration, P/N 003.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:32Z
Check the source to verify that this is the current version before use.

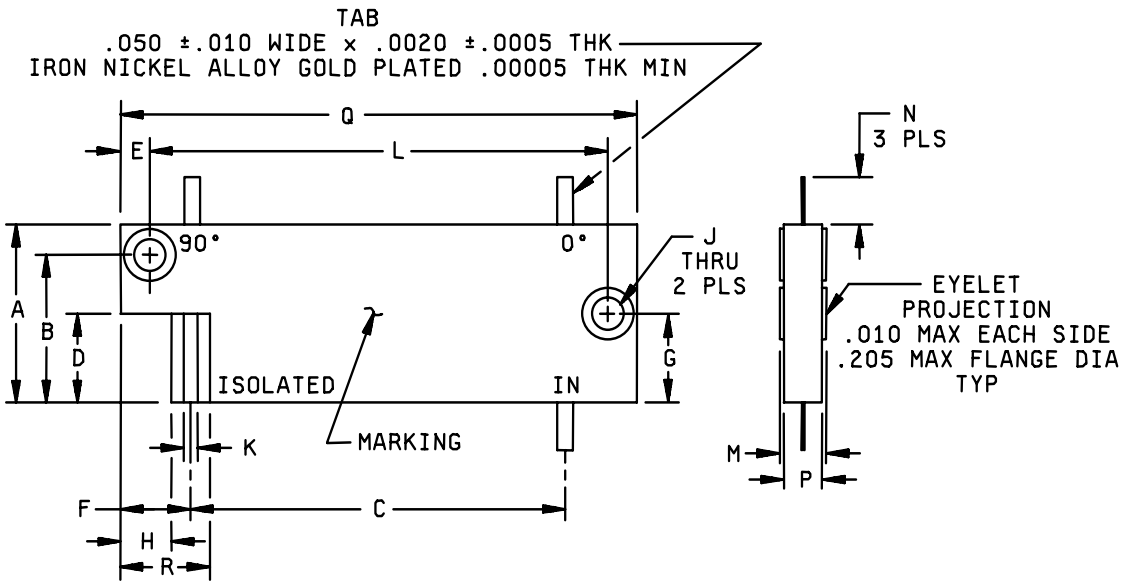

	Dimensions			
	Inches		Millimeters	
	Max	Min	Max	Min
A	.58	.54	15	14
B	.44	.40	11	10
C	1.19	1.15	30.2	29.2
D	.30	.26	7.6	6.6
E	.11	.07	2.8	1.8
F	.24	.20	6.1	5.1
G	.30	.26	7.6	6.6
H	.18	.14	4.6	3.6
J	.105 dia	.093 dia	2.67 dia	2.36 dia
K	.054	.034	1.37	.86
L	1.442	1.432	36.63	36.37
M	.139	.129	3.53	3.28
N	N/A	.18	N/A	4.6
P	.120	N/A	3.05	N/A
Q	1.65	1.59	41.9	40.4
R	.30	.26	7.6	6.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (.13mm) for three place decimals and ±.02 (.5 mm) for two place decimals.

FIGURE 3. Dimensions and configuration, P/N 004.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figures 1, 2, and 3.

Terminals: Solder tabs.

Material and finish of terminals:

Part numbers 01, 03, and 04 - Nickel with electrodeposited tin coating 0.0001 to 0.0005 inch thick per ASTM-B545 “Standard Specification for Electrodeposited Coatings of Tin” or Iron-nickel alloy in accordance with SAE-AMS-I-23011 “Iron-Nickel Alloys for Sealing to Glasses and Ceramics”, Class I (KOVAR), gold plated in accordance with SAE-AMS-2422 “Plating, Gold” and/or, ASTM-B488 “Electrodeposited Coating of Gold for Engineering Uses”, type I, grade C. Nickel is to be used only if specification cannot be met using alternate material means.

Part number 02 - Kovar, gold plated in accordance with SAE-AMS-2422 and/or, ASTM-B488, type II, class I, grade C.

Ambient temperature:
Operating - -54° to +110°C.
Storage - -62° to +125°C.

Electrical performance characteristics: See table I.

TABLE I. Electrical performance characteristics.

M23971/ 1-	Impedance (ohms)	Frequency range (MHz)	Average coupling (dB)	vswr max	Insertion loss max (dB)	Isolation min (dB)	Phase balance 90°	Amplitude balance (dB)	Power level		Figure
									avg (W)	pk (W)	
01	50	225-400	3 +.2, -0	1.2:1	0.3	23	±1.5	0.4	60	300	1
02	50	250-500	3 +.2, -0	1.2:1	0.25	23	±1.5	0.5	60	300	1
03	50	225-400	3 +.2, -0	1.2:1	0.25	25	±1.5	0.4	100	200	2
04											3

Part number: M23971/1- (and dash number from table I).

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Navy - AS, MC, OS

Preparing activity:
DLA - CC

(Project 5985-1227-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:32Z
Check the source to verify that this is the current version before use.