
INCH-POUND
MIL-DTL-23971/6D
27 November 2017
SUPERSEDING
MIL-DTL-23971/6C
23 April 2013

DETAIL SPECIFICATION SHEET

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, TO-5

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-23971.

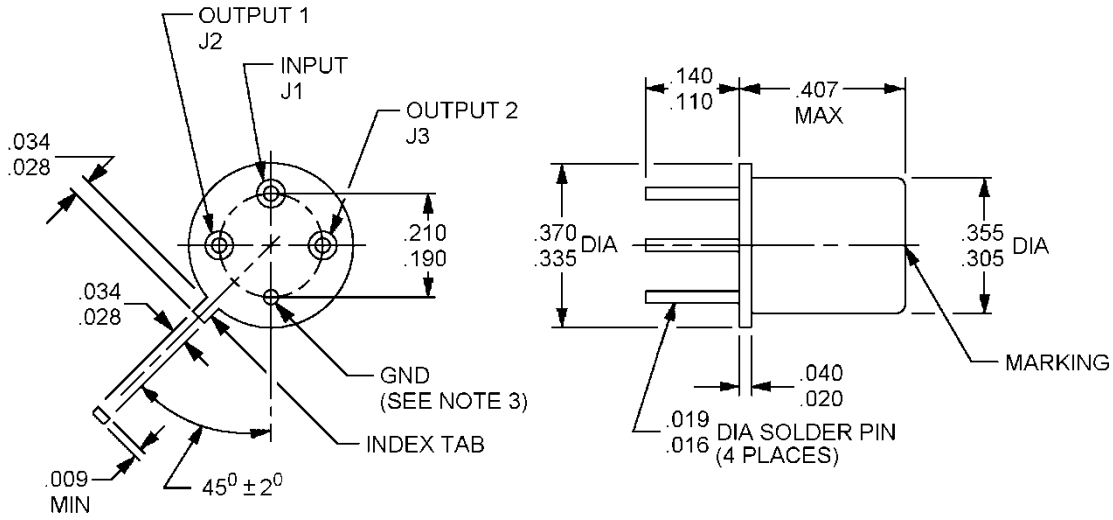

Inches	mm	Inches	mm	Inches	mm
.009	0.23	.040	1.02	.305	7.75
.016	0.41	.110	2.79	.335	8.51
.019	0.48	.140	3.56	.355	9.02
.020	0.51	.190	4.83	.370	9.40
.028	0.71	.210	5.33	.407	10.34
.034	0.86				


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Pin is grounded to the internal circuit of the power divider by the manufacturer.

FIGURE 1. Dimensions and configuration, 2-way, dash number 01.

AMSC N/A

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

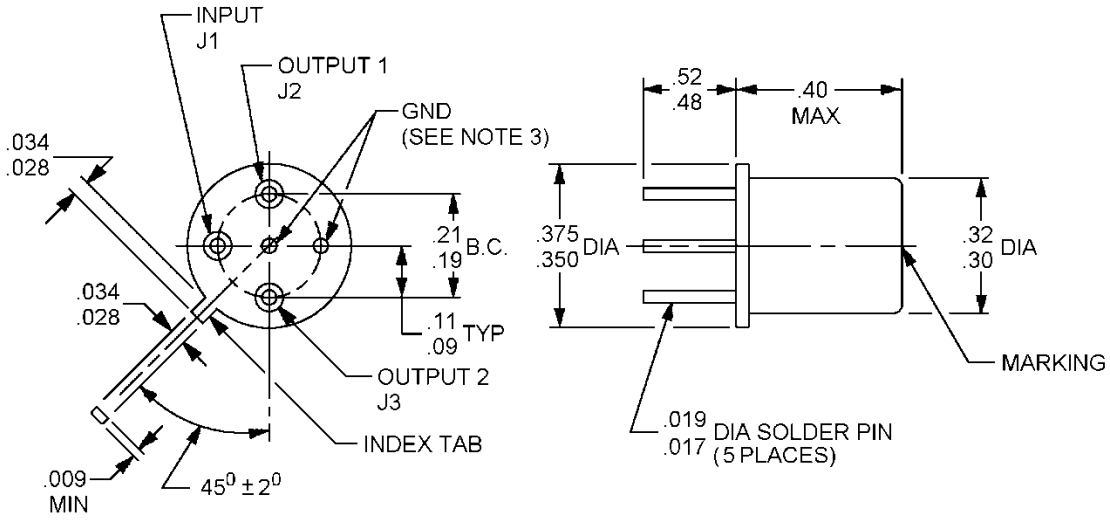


Inches	mm	Inches	mm
.009	0.20	.21	5.3
.017	0.43	.30	7.6
.019	0.48	.32	8.1
.028	0.71	.350	8.89
.034	0.86	.375	9.52
.09	2.3	.40	10.2
.11	2.8	.48	12.2
.19	4.8	.52	13.2

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Ground pins are grounded to the internal circuit of the power divider, by the manufacturer.

FIGURE 2. Dimensions and configuration, 2-way, dash number 03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

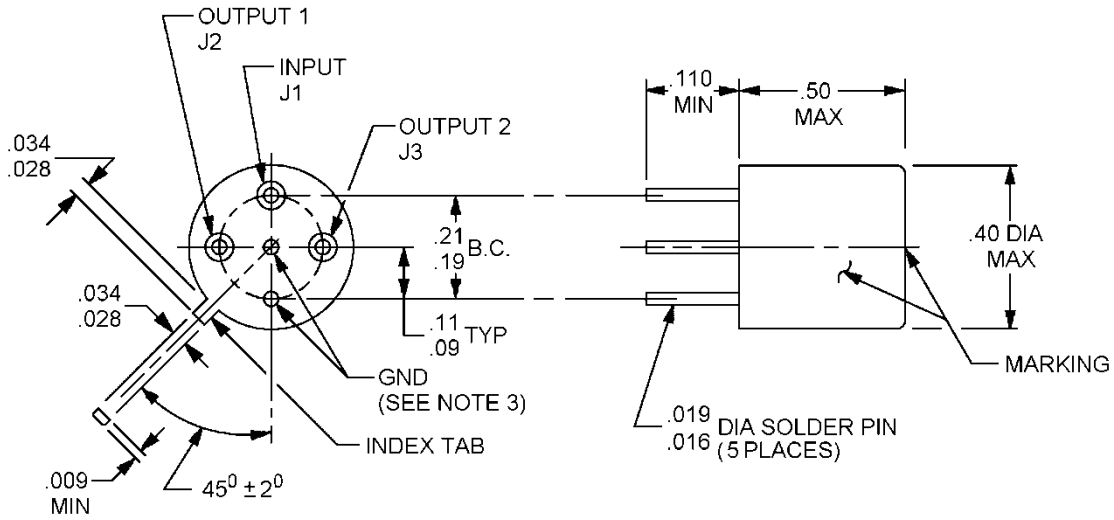


Inches	mm	Inches	mm
.009	0.23	.11	2.8
.016	0.41	.110	2.80
.019	0.48	.19	4.8
.028	0.71	.21	5.3
.034	0.86	.40	10.2
.09	2.3	.40	12.7

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Ground pins are grounded to the internal circuit of the power divider, by the manufacturer.

FIGURE 3. Dimensions and configuration, 2-way, dash numbers 02, 04, 05, 06, and 07.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

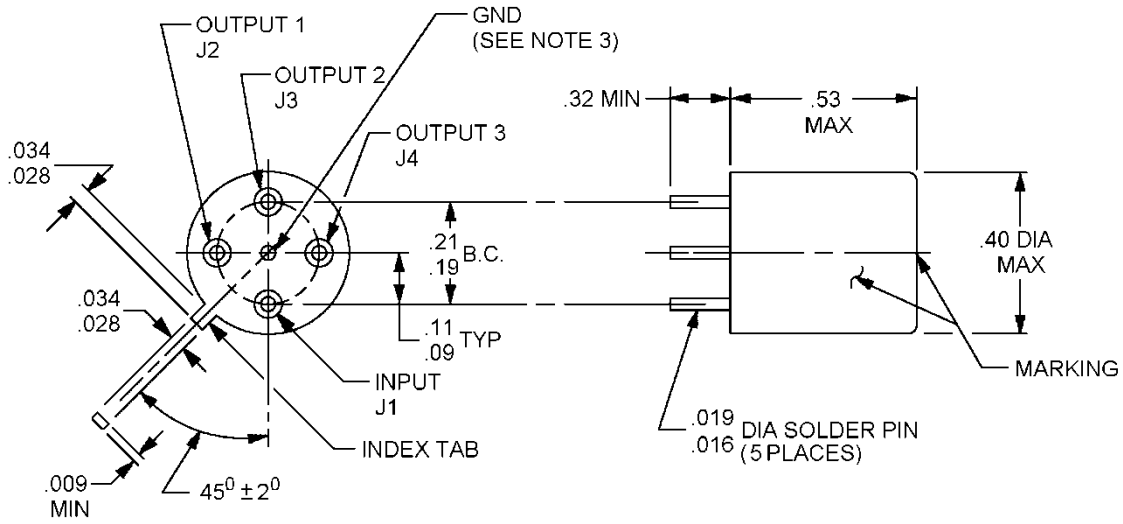


Inches	mm	Inches	mm
.009	0.23	.11	2.8
.016	0.41	.19	4.8
.019	0.48	.21	5.3
.028	0.71	.32	8.1
.034	0.86	.40	10.2
.09	2.3	.53	13.5

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Ground pins are grounded to the internal circuit of the power divider, by the manufacturer.

FIGURE 4. Dimensions and configuration, 3-way, dash number 08.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

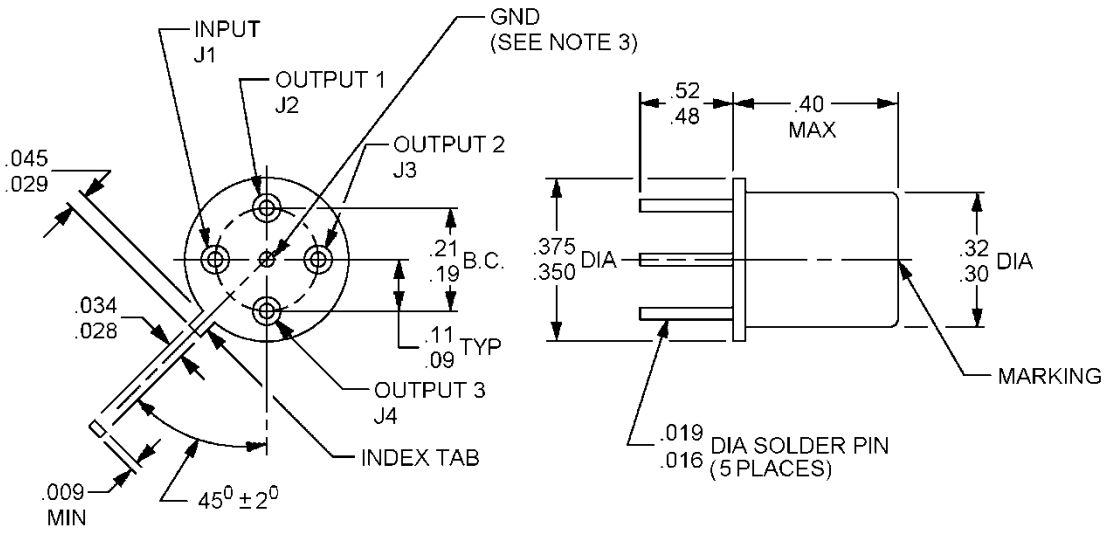

Inches	mm	Inches	mm
.016	0.41	.21	5.3
.019	0.48	.30	7.6
.028	0.71	.32	8.1
.029	0.74	.350	8.89
.034	0.86	.375	9.52
.045	1.14	.40	10.2
.09	2.3	.48	12.2
.11	2.8	.52	13.2
.19	4.8		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Ground pins are grounded to the internal circuit of the power divider, by the manufacturer.

FIGURE 5. Dimensions and configuration, 3-way, dash number 09.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics and physical requirements.

M23971/6-	Impedance (ohms)	Frequency range (MHz)	Average coupling (dB)	VSWR max	Insertion loss max (dB)	Isolation min (dB)	Phase balance max (degree)	Amplitude balance (dB) max	Power level		Weight pounds (grams)	Ambient temperature		Fig.
									avg (W)	pk (W)		Operating	Storage	
01	50	1-100	3.0 +.5 -.0	1.3:1	0.6	30	±1.0	± 0.1		1/	.003 (1.36)	-54°C to +100°C	-75°C to +150°C	1
02	50	2-32	3.0 +.2 -.0	1.3:1	0.5	30	±1.0	± 0.2	---	.1	.005 (2.27)	-45°C to +85°C	-57°C to +85°C	3
03	50	2-100	3.0 +.2 -.0	1.3:1	0.25	40	±1.0	± 0.1	---	3.	.062 (28.0)	-18°C to +85°C	-57°C to +71°C	2
04	50	10-100	3.0 +.2 -.0	1.3:1	0.5	30	±1.0	± 0.2	---	0.1	.005 (2.27)	-45°C to +85°C	-57°C to +85°C	3
05	50	20-200	3.0 +.2 -.0	1.3:1	0.5	30	±1.0	± 0.2	---	0.1	.005 (2.27)	-45°C to +85°C	-57°C to +85°C	3
06	50	100-300	3.0 +.2 -.0	1.3:1	0.5	30	±1.0	± 0.2	---	0.1	.005 (2.27)	-45°C to +85°C	-57°C to +85°C	3
07	50	200-400	3.0 +.2 -.0	1.3:1	0.5	30	±1.0	± 0.2	---	0.1	.005 (2.27)	-45°C to +85°C	-57°C to +85°C	3
08	50	10-100	4.8 +.3 -.0	1.3:1	0.5	30	±1.0	± 0.3	1.0	---	.060 (27.2)	not applicable	not applicable	4
09	50	10-200	4.8 +.3 -.0	1.3:1	0.5	30	±2.0	± 0.2	---	3.0	.006 (2.72)	-46°C to +52°C	-57°C to +71°C	5

1/ Power level: The network shall not be damaged by the following: Input powers at 100°C ambient.

(a) 0.50 watt to input port with ports 1 and 2 seeing a load VSWR of 1.5 maximum; 0.05 watts with one output shorted and one open.

(b) 0.10 watt input to each of ports 1 and 2 with input port seeing a load of 1.5 VSWR maximum; 0.05 watt with input port shorted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figures 1 through 5.

Housing: Metal can, hermetically sealed.

Terminals: Male, plug-in.

Material: Copper.

Electrical characteristics: See table I.

Weight: See table I.

Ambient temperature: See table I.

Environmental tests: See table II.

Part or Identifying Number (PIN): M23971/6- (dash number from table I).

TABLE II. Environmental tests: In accordance with MIL-DTL-23971, except:

M23971/6	Barometric Pressure MIL-STD-202-105	Thermal Shock MIL-STD-202-107	Resistance to soldering heat MIL-STD-202-210	Vibration, high frequency MIL-STD-202-204	Shock (specified pulse) MIL-STD-202-213	Salt Spray MIL-STD-202-101
01	2/	Test condition B	1/	Test condition D	Test condition I	2/
02, 04	2/	2/	2/	Test condition B	Test condition I	Test condition A
05, 06, 07, 08	2/	2/	2/	Test condition B	Test condition I	2/

1/ Immersions shall be 0.03 inch maximum from level of header.
2/ Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-23971, this document references the following:
MIL-STD-202-101
MIL-STD-202-105
MIL-STD-202-107
MIL-STD-202-204
MIL-STD-202-210
MIL-STD-202-213

The margins of this specification are marked with vertical lines to indicate modifications generated by this revision. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Navy - AS, MC, OS

Preparing activity:
DLA - CC

(Project 5985-2018-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.