INCH-POUND

MIL-DTL-23971/7A
23 April 2002
SUPERSEDING
MIL-P-23971/7
22 February 1980

DETAIL SPECIFICATION SHEET

POWER DIVIDER, 4 PORT QUADRATURES, N CONNECTORS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the power divider described herein shall consist of this specification sheet and MIL-DTL-23971.

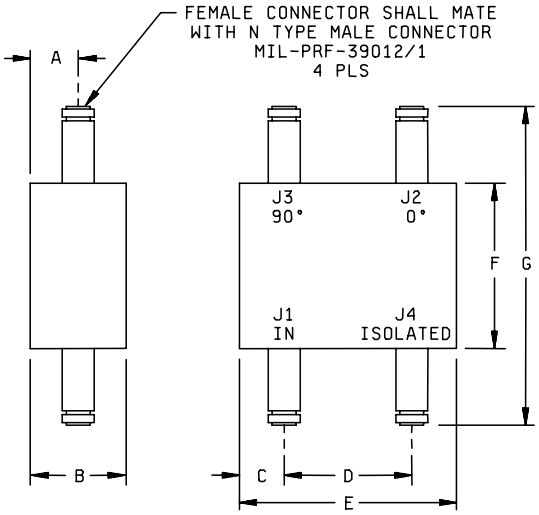


| | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Max | Min | Max | Min |
| A | .380 | .370 | 9.65 | 9.40 |
| B | .76 | .74 | 19.3 | 18.8 |
| C | .355 | .345 | 9.02 | 8.76 |
| D | 1.01 | .99 | 25.7 | 25.1 |
| E | 1.71 | 1.69 | 43.4 | 42.9 |
| F | 1.31 | 1.29 | 33.3 | 32.8 |
| G | 2.51 | 2.49 | 63.8 | 63.2 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration, dash number 01.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1.

Case: O-ring seal.

Weight: 0.269 pounds (120 grams).

Ambient temperature: Operating -55° to +100°C.

Electrical performance characteristics:

Impedance: 50 ohms.

Frequency range: 7.0 to 12.4 GHz.

Average coupling: 3 dB +.2, -.0.

VSWR: 1.35:1 maximum.

Insertion loss: .1 dB maximum.

Isolation: 15 dB minimum.

Phase balance: 90° ±1.5°.

Amplitude balance: ±0.5 dB.

Power level: 100 W average, 3 kW peak.

Part number: M23971/7-01

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Navy - AS, MC, OS

Preparing activity:
DLA - CC

(Project 5985-1227-07)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.