INCH-POUND
MIL-DTL-23971/9C
18 September 2026
SUPERSEDING
MIL-DTL-23971/9B
3 May 2012


DETAIL SPECIFICATION SHEET

POWER DIVIDER, N-WAY, 0 DEGREES, SMA CONNECTORS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Inactive for new design after 2 March 2017.

The requirements for acquiring the power divider described herein shall consist of this specification sheet and MIL-DTL-23971.

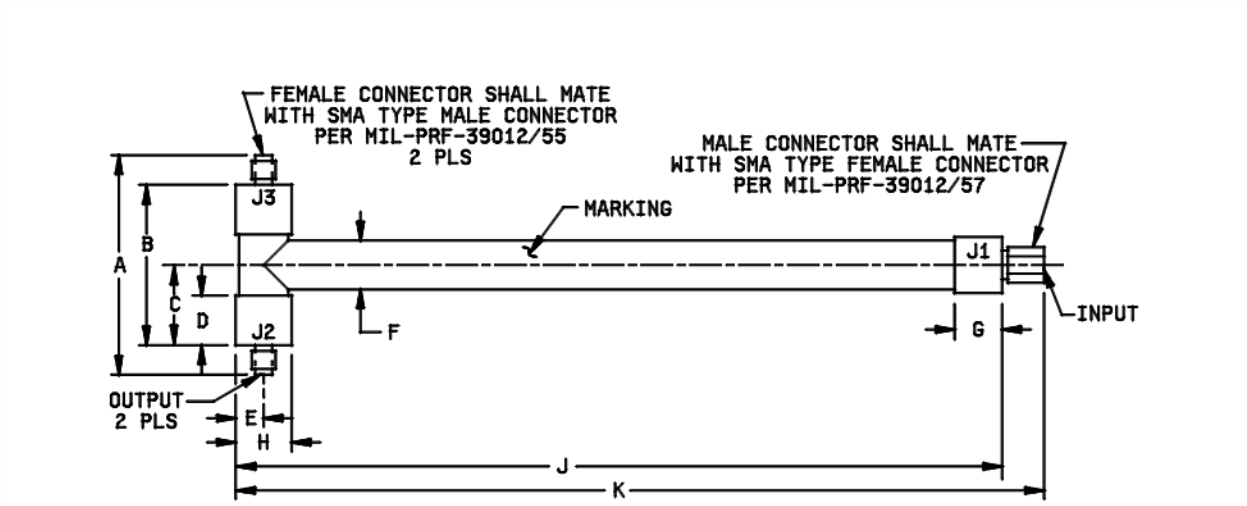

	Dimensions			
	Inches		Millimeters	
	Max	Min	Max	Min
A	2.00	1.88	50.8	47.8
B	1.43	1.41	36.3	35.8
C	.98	.96	24.9	24.4
D	.45	.43	11.4	10.9
E	.255	.245	6.5	6.2
F	4.45 dia	4.25 dia	113.0 dia	108.0 dia
G	.43	.41	10.9	10.4
H	.51 dia	.49 dia	13.0 dia	12.4 dia
J	6.78	6.77	172.2	172.0
K	7.20	7.08	182.9	179.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration, 2-way dash number 01.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1.

Body: O-ring seal.

Ambient temperature:	operating	storage
	-40° to +105°C	-65° to +125°C

Electrical performance characteristics:

Impedance: 50 ohms.

Frequency range: 0.5 to 1.5 GHz.

Average coupling: 3 ±.25 dB. 1/

VSWR: 1.15:1 maximum. 1/

Insertion loss: 0.05 dB maximum.

Isolation: 6.0 dB minimum.

Phase balance: ± 6.0 degrees maximum.

Amplitude balance: ±1.0 dB maximum.

Power level: 150 W average, 2 kW peak.

Environmental tests: In accordance with MIL-DTL-23971 except:

Thermal shock: In accordance with MIL-STD-202-107, test condition B.

Shock: In accordance with MIL-STD-202-213, test condition G, except peak value of 100G.

Salt atmosphere: In accordance with MIL-STD-202-101, test condition A.

1/ Measured from 0.960 to 1.215 GHz.

Part number: M23971/9-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:35Z
Check the source to verify that this is the current version before use.

Referenced documents: In addition to MIL-DTL-23971, this document references the following
MIL-PRF-39012/55
MIL-PRF-39012/57
MIL-STD-202-101
MIL-STD-202-107
MIL-STD-202-213

Changes from previous issue. The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-2026-011)

Review activities:
Navy - AS, MC, OS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:35Z
Check the source to verify that this is the current version before use.