MIL-R-23954D
20 May 1983
SUPERSEDING
MIL-R-23954C
15 November 1977

MILITARY SPECIFICATION

REFUSE CONTAINERS, HOISTING UNIT; TILT-OVER, FOR FRONT LOADING COMPACTION TYPE TRUCKS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers steel refuse containers operationally suitable for use with front loading, compaction type body, refuse collection, trucks procured under MIL-T-46701 and MIL-T-46748.

* 1.2 Classification. Refuse containers shall be of the following classes, types, and sizes as specified (see 6.2) (see figures 1 through 4 for illustrations).

Class I - Equipped for use with two point container hoisting device.
Class II - Equipped for use with single and two point container hoisting devices.
Class III - Equipped for use with single point container hoisting device.
Type A - Top and end loading.

Size 3 - 3 cubic yards (cu yd) net volume
Size 4 - 4 cu yd net volume.
Size 5 - 5 cu yd net volume.
Size 6 - 6 cu yd net volume.
Size 8 - 8 cu yd net volume.

Type B - Top loading.

Size 1 - 1 cu yd net volume.
Size 2 - 2 cu yd net volume.
Size 3 - 3 cu yd net volume.
Size 4 - 4 cu yd net volume.

Type C - Curb collection.

Size 2 - 2 cu yd net volume.
Size 3 - 3 cu yd net volume.
Size 4 - 4 cu yd net volume.

Type D - Trailer type, wheel mounted.

Size 4 - 4 cu yd net volume.
Size 5 - 5 cu yd net volume.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 3990

Source: https://assist.dla.mil -- Downloaded: 202610-19T18:28Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-781 - Strapping, Steel, and Seals.

MILITARY

MIL-T-704 - Treatment and Painting of Materiel.
MIL-C-3774 - Crates, Wood; Open 12,000- and 16,000-Pound Capacity.
MIL-T-46701 - Truck: Tilting Frame, Container Handling, Commercial, 51,000 Pounds, GVW, 6X4; Including Detachable Bodies.
MIL-T-46748 - Truck, Refuse Collection; Compaction Type Body, with Front Container Hoisting Device; 6X4, Commercial.

STANDARD

MILITARY

MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents form a part of this specification to the extent specified herein.

OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

29 CFR 1910.145 - Specifications for Accident Prevention Signs and Tags.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-19T18:28Z
Check the source to verify that this is the current version before use.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

Z245.3 - Safety Requirements for Stability of Refuse Bins.

(Application for copies should be addresssed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

AMERICAN WELDING SOCIETY, INC., (AWS)

Welding Inspection Manual.
D1.1 - Structural Welding Code.

(Application for copies should be addressed to the American Welding Society, Inc., 2501 N.W., 7th Street, Miami, FL 33125.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the contractor shall furnish one complete refuse container of the class, type, and size specified for first article inspection and approval (see 4.2.1 and 6.4).

* 3.2 Standard commercial product. The container shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the container being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

* 3.3 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

3.4 Design. The containers shall be completely compatible with the container hoisting device of the refuse collection truck as specified in MIL-T-46701 and MIL-T-46748. The container design shall permit complete

Source: https://assist.dla.mil -- Downloaded: 202610-19T18:28Z
Check the source to verify that this is the current version before use.

discharge of the contents by using the operating controls on the truck, without manual assistance of any kind. There shall be no construction or obstruction within the container to interfere with the discharging of contents. It shall not be necessary to manually open the container lid(s) in order to accomplish the dumping of refuse into the truck body. A means of escape, consisting of a latch or linkage whereby at least one door of each container can be opened from the inside, shall be provided on type A, B, and D containers. When specified (see 6.2), type B containers shall be of a tapered commercial design to facilitate nesting of like containers. When specified (see 6.2), four swivel casters of sufficient capacity, with antifriction wheel bearings shall be provided, and container shall be fitted with caster pads. A drain hole not less than 1-1/2 inches diameter nominal pipe size, fitted with a threaded corrosion-resistant plug, shall be provided at the bottom of one end wall of each container. When specified (see 6.2), type C and/or type D containers shall be equipped with riding steps regularly offered by the manufacturer on his standard type C and/or type D container. In addition to other requirements specified herein, limiting requirements for container bodies, lids, and doors, unless otherwise specified (see 6.2), shall be as shown in table I.

TABLE I. Limiting requirements, type A, B, C, and D containers.

Type and size	Wt of payload per cu yd net volume (lb nom)	Body width (in., ± 1/2 in.)	Body height (in., not less than)	Metal thickness, nom (in., not less than)			Size of end doors (in., not less than)
				Bottom	Side panel	End panel	
Type A							
Size 3	650	72	54	0.1046	0.1046	0.1046	23 X 23
Size 4	550	72	56	0.1046	0.1046	0.1046	23 X 23
Size 5	500	72	60	0.1046	0.1046	0.1046	30 X 28
Size 6	500	72	60	0.1046	0.1046	0.1046	30 X 27
Size 8	350	72	78	0.1046	0.1046	0.1046	30 X 27
Type B							
Size 1	1,000	65 min 72 max.	27	0.1046	0.1046	0.1046	N/A
Size 2	1,000	64 min 72 max.	36	0.1046	0.1046	0.1046	N/A
Size 3	650	72	48	0.1046	0.1046	0.1046	N/A
Size 4	550	72	48	0.1046	0.1046	0.1046	N/A
Type C							
Size 2	1,000	72	36	0.1345	0.1046	0.1345	N/A
Size 3	650	72	48	0.1345	0.1046	0.1345	N/A
Size 4	550	72	48	0.1345	0.1046	0.1345	N/A
Type D							
Size 5	550	72	56	0.1046	0.1046	0.1046	MS*

*MS - Manufacturer's standard.

3.5 Construction. Containers shall be constructed in accordance with the requirements specified herein and as necessary to be operationally compatible with the front loading refuse collection trucks specified (see 3.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:28Z
Check the source to verify that this is the current version before use.

3.5.1 Hoisting attachment.

3.5.1.1 Class I container. Class I container shall have a hoisting attachment suitably located on each end wall, and designed to accommodate the lifting forks of two point container hoisting devices. At the option of the contractor, the hoisting attachments may be of the boxed sleeve or open bracket guide design, provided that in either design each attachment shall be not less than 24 inches long, except that for size 1 container the attachments shall be not less than 13 inches long. Each hoisting attachment shall be designed, reinforced, braced, and attached to withstand a pull of not less than 4,000 pounds (lb), applied as a sheering action, without failure or permanent distortion of any part. The two point hoisting attachment shall be constructed of not less than 0.1196 inch thick steel (US revised standard gage No. 11).

* 3.5.1.2 Class II containers. Class II containers shall have a hoisting attachment located on each end wall designed to accommodate the two point container hoisting device, and shall have a hoisting attachment located on rear side wall designed to accommodate the single point container hoisting device as shown in figure 5. The two point hoisting attachment shall be constructed of not less than 0.1196 inch thick steel (US revised standard gage No. 11). At the option of the contractor, the end wall two point container hoisting attachments may be of the boxed sleeve or open bracket guide design, provided that in either design each attachment shall be not less than 24 inches long, except that for size 1 container, the attachments shall be not less than 13 inches long. Each end wall hoisting attachment shall be designed, reinforced, braced, and attached to withstand a pull of not less than 4,000 lb, applied as a shearing action, without failure or permanent distortion of any part. The hoisting attachment located on the rear side wall will be designed to accommodate the hookup system of the single point hoisting device. The rear side wall hoisting attachment shall be capable of being locked automatically to the hoisting device on the truck (see 3.4), and of withstanding a pull of not less than 4,500 lb. The single point container hoisting attachment shall be as shown in figure 5.

* 3.5.1.3 Class III containers. Class III containers shall have a hoisting attachment located on rear side wall designed to accommodate the single point container hoisting device. The rear side wall hoisting attachment shall be capable of being locked automatically to the hoisting device on the truck (see 3.4), and of withstanding a pull of not less than 4,500 lb. The single point container hoisting attachment shall be as shown in figure 5.

* 3.5.2 Top lids. Unless otherwise specified (see 6.2), and excepting type C containers, all containers shall have top lids. Unless otherwise specified (see 6.2), thickness of sheet steel for top lids shall be not less than 0.0598-inch (US revised standard gage No. 16) nominal thickness. Type A, sizes 3 and 4, and type B containers shall have right and left top lids with their meeting edge on the transverse centerline of the container. Type C containers shall have flap lids, unless otherwise specified (see 6.2), which may be closed to prevent undue wind discharge of contents during hoisting and dumping operations or between loading operations. The type C container flap lids shall be that regularly offered by the manufacturer on his standard type C container. Type A, sizes 5, 6, and 8 containers, and type D containers shall have front and back lids with their meeting edge parallel with the longitudinal center of the container, and the rear lid shall have shock

Source: https://assist.dla.mil -- Downloaded: 202610-19T18:28Z
Check the source to verify that this is the currenversion before use.

absorbing torsion spring stops to protect the lid during dumping operations. Each lid shall have a handle suitably located for manual opening and closing. Top lids shall extend 10 to 15° beyond the perpendicular from the hinge of the lid to insure a stable lid to stay safely in an open position. Unless otherwise specified (see 6.2), lids for containers size 5 and larger, shall have boxed edges constructed with a cross section of not less than 1 inch. For containers size 4 and smaller, rolled edges not less than 3/8-inch inside diameter are acceptable. When metal top lids are not required, type D containers shall be equipped with a fabric covering of suitable material equal to the manufacturer's current standard commercial offering. When specified (see 6.2), a mechanical advantage device shall be provided to assist the opening of top lids for top loading containers. The maximum force for opening of the lids shall be not more than 15 lb and the lid shall stay in the open position without props. When a mechanical advantage device is provided, single lids are acceptable.

3.5.3 End doors. Unless otherwise specified (see 6.2), type A and D (when manufacturer's current standard commercial type D model is so equipped), containers shall have a door in the upper portion of each end panel. Thickness of sheet steel for end doors shall be not less than 0.0747-inch (US revised standard gage No. 14) nominal thickness. At least one door of each container shall be openable from the inside. Doors shall have snug fitting edges to preclude the entrance of flies. Bottom edge of end doors shall not be over 48 inches above the bottom of the container.

* 3.5.3.1 Sliding end doors. When specified (see 6.2), type A and D containers shall have sliding door assemblies in the upper portion of each end panel. All doors shall be provided with latch system in the closed position to keep doors closed during lifting cycle. Doors and tracks shall be designed to operate on the outside and slide to the closed position during the hoisting operation. Thickness of sheet steel for end doors shall be not less than 0.0747-inch (US revised standard gage No. 14) nominal thickness. Bottom edge of end doors shall not be over 48 inches above the bottom of the container.

* 3.5.4 Hinges. Top lids furnished with shock absorbing torsion spring stops shall have heavy-duty hinge pins not less than 1 inch in diameter. For top lids without springs, the hinge pins shall not be less than 3/8 inch in diameter. Straps for hinges shall be of 1/4-inch thick heavy-duty steel or greater and shall be single piece construction. For size 4 and smaller, the edges rolled for reinforcement are acceptable as part of the hinge. Butt hinges are not acceptable. Right and left lids shall be hinged at not less than two points, front and rear lids and flap lids shall be hinged at not less than three points. Each end door shall have two heavy-duty plate butt hinges not less than 4 by 4 inches with fixed pins. Type D container end doors shall be equipped with manufacturer's current standard commercial hinges.

3.5.5 Bottom rests. Containers shall have bottom rest of one of the following fabrications:

a. Three steel 3-inch channels, located at each end and one in the center, each channel running full depth of the container.
b. One steel 3-inch channel centrally located and running full depth of the container and equipped with corner stabilizing pads, having the same height as the channel. Corner pads shall be adequate for mounting casters.

Source: https://assist.dla.mil -- Downloaded: 202610-19T18:28Z
Check the source to verify that this is the current version before use.

3.5.6 Reinforcements. The refuse container shall be fully reinforced to withstand the stresses from heavy loading and rough usage, and to provide rigidity and resist buckling. The ends of angles, channels, pipes, and other hollow members shall be welded closed to prevent entry of vermin or other objects. Reinforcements shall include the following:

a. Side panels of size 5 and larger containers shall have not less than one pressed rib in each panel, or shall have an equivalent reinforcement angle or channel welded on the inside face of each panel. End panels shall have sufficient reinforcement, as required, to withstand applied loadings and pickup forces.
b. The perimeters of openings for lids and doors shall have reinforcements to provide rigidity and act as stops. Double-thickness metal, or reinforcing pads, shall be provided where hinges are attached.
c. Lids and doors shall have pressed ribs or equivalent reinforcement to provide rigidity. Edges shall be in accordance with 3.5.2 and 3.5.3. Double-thickness metal reinforcing shall be provided where hinges are attached to flat panel surface rather than to reinforced edges.
d. Steel scuff or bumper plates, not less than 0.1345 inch (US revised standard gage No. 10) shall be provided at each end of the rear panel of the container body, adjacent to the hoisting attachments, to protect the container from damage caused by the points of the hoisting forks.

3.5.7 Type D containers. Type D containers shall be equipped with two pneumatic tires, hand actuated parking brake, T-bar lifting handle, pintle hook type hitch, skid rest, 40 inch to 48 inch tow bar equipped with tow ring and two safety chains. Suspension shall be of the drop axle design. Above items shall be of the manufacturer's current standard commercial offering.

3.6 Performance. In addition to other design and operational requirements specified herein, all containers shall be capable of withstanding the test specified in 4.3 without breakage, joint failure, or permanent distortion of any part. The test load, in lb, shall be equivalent to the product of the size number multiplied by the weight of payload per cu yd as shown in table I.

3.7 Cleaning, treatment, and painting. Unless otherwise specified (see 6.2), surfaces normally painted in good commercial practice shall be cleaned, treated, and painted as specified herein. When specified (see 6.2), the unit shall be cleaned, treated, and painted in accordance with MIL-T-704, type A or B. Surfaces to be painted shall be cleaned and dried to insure that they are free from contaminants such as oil, grease, welding slag and spatter, loose mill scale, water, dirt, corrosion product, or any other contaminating substances. As soon as practicable after cleaning, and before any corrosion product or other contamination can result, the surfaces shall be prepared or treated to insure the adhesion of the coating system. The painting shall consist of at least one coat of primer and one finish coat. The primer shall be applied to a clean, dry surface as soon as practicable after cleaning and treating. Painting shall be with manufacturer's current materials according to manufacturer's current processes and the total dry film thickness shall be not less than 2.5 mils over the entire surface. The paint shall be free from runs, sags, orange peel, or other defects. The color of the finish coat shall be as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-19T18:28Z
Check the source to verify that this is the currentversion before use.

* 3.7.1 Protective coating. When specified (see 6.2), a protective coating system shall be provided on the interior surface of the refuse containers. The protective coating material shall be polyurethane monomer container system. The system shall consist of a single component polyurethane coating applied in a dry thickness of not less than 3 mils on the interior surface. This coating shall be compatible with a two component, 100 percent solids, 2-1/2 to 1 ratio, polyurethane elastomer which is to be applied as a critical area liner. This liner shall be not less than 20 mils dry on the vertical walls and not less than 30 mils dry on the bottom. The height of the vertical wall application for each coating shall be not less than 12 inches from the bottom with the mil thickness measured 6 inches from the bottom. The protective coating system shall compliment unloading while providing impact and abrasion protection as well as being chemically resistant to acids, alkalis, water, and salt. Asphaltic or coal tar extended solutions are not acceptable.

3.8 Stability. Containers shall be stable in accordance with ANSI Z245.3.

3.9 Signs.

3.9.1 Caution signs. Caution signs shall be in accordance with ANSI Z245.3.

* 3.9.2 Danger signs. Three danger signs shall be permanently affixed to the lower center of the outside face of the wall opposite the bail wall and each end wall of the container. Exterior size of danger sign shall be not less than 7 inches high and 10 inches long. The sign shall read as follows:

"DANGER - STAY CLEAR AT ALL TIMES WHEN CONTAINER IS OFF GROUND"

The configuration, wording, dimensions, and color of the sign shall conform to OSHA 29 CFR 1910.145.

* 3.10 Marking. When specified (see 6.2), each container shall be marked with the contract or order number and the National Stock Number (NSN). This marking shall be of permanent type paint and contrasting color of the container. The letter size of the marking shall be a minimum of 2 inches high.

3.11 Workmanship.

3.11.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

3.11.2 Welding. All welding procedures shall be qualified in accordance with section 5 of AWS D1.1. All welding shall conform to the requirements of section 1 through 7 of AWS D1.1. Joints and seams shall be in continuous weld.

3.11.3 Castings and forgings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the castings ability to perform its intended function. Forgings shall be uniform in quality and condition, and shall be free from tears, cracks, seams, laps, internal ruptures, imbedded scale, segregations, or other defects which may detrimentally affect the suitability for the purpose intended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:28Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Material inspection. The contractor is responsible for insuring that supplies and materials are inspected for compliance with all the requirements specified herein and in applicable referenced documents.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. First article inspection shall be performed on one refuse container. This inspection shall include the examination of 4.2 and the test of 4.3. The first article shall be the first refuse container produced prior to initiation of the production items.

* 4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.3 and packaging inspection of 4.5.

4.3 Examination. Each container shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.4 Test. The first article refuse container shall be tested as follows to verify compliance with the requirements of this specification. All tests shall be repeated for not less than 10 cycles.

a. Place the empty container on a level ground surface.
b. The container shall be lifted by each of the applicable hoisting devices through the complete dumping cycle to insure compatibility with the trucks specified in 3.3.
c. Load the container with a quantity of dry sand of the total payload weight specified in 3.6 for the applicable size container.
d. The loaded container shall be lifted by each of the applicable hoisting devices to the height of 48 inches from the ground level and held in this position for 1 minute.

Source: https://assist.dla.mil -- Downloaded: 20260-19T18:28Z
Check the source to verify that this is the current version before use.

e. The loaded container shall be lowered at controlled speed from a height of 4 feet onto one 4 by 4 inch piece of wood placed horizontally on the ground so that the wood is in a diagonal position across the corners of the bottom of the container. The container shall then be lifted and examined for permanent distortion, warpage, bending or other damage to any part of the container. Any failure or defect shall be cause for rejection.
f. Type C containers shall be tested in accordance with the above criteria except that type C containers equipped with riding steps shall be tested with a 300-lb weight applied to each riding step in addition to the load designated in 4.4 c.
g. Type D containers shall be tested in accordance with the above cirteria except that type D containers equipped with hand actuated parking brake shall be tested while fully loaded, with brake set, parked on a 30 percent grade to insure holding capability.

4.5 Packaging inspection. The container shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

* 5.1 Packing. The packing shall be level A, B, or C as specified (see 6.2).

* 5.1.1 Level A. Each container, except type D, shall be shipped in a crate conforming to MIL-C-3774, type I. Cushioning, anchoring, blocking, and bracing shall be in accordance with the appendix of MIL-C-3774.

* 5.1.2 Level B. Containers shall be shipped uncrated. All lids and doors shall be closed and secured to prevent accidental opening with strapping conforming to QQ-S-781, with the class, type, duty, finish, and grade at the contractor's option. Cushioning shall be placed under strapping where required, to prevent damage to the container.

* 5.1.3 Level C. Each container shall be preserved in accordance with the contractor's standard practice in a manner to prevent deterioration and damage. Each container shall prepared for shipment in a manner which will insure arrival at destination in a satisfactory condition. Preparation for delivery shall comply with applicable carrier rules and regulations. If containers are shipped uncrated, all lids and doors shall be closed and secured to prevent accidental opening.

5.2 Marking. Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The containers specified are for use with refuse collection trucks having front mounted hoisting device with two pickup arms or a single-point pickup mechanism.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Class, type, and size of container required (see 1.2).
c. When first article is required for inspection and approval (see 3.1, 4.2.1, and 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:28Z
Check the source to verify that this is the current version before use.

d. When nestability is required (see 3.4).
e. When limiting requirements are other than specified (see 3.4).
f. When casters are required (see 3.4).
g. When riding steps are required on type C containers (see 3.4).
h. When top lids are other than specified (see 3.5.2).
i. When top lids are not required (see 3.5.2).
j. When a mechanical advantage device is required (see 3.5.2).
k. When thickness of sheet steel for top lids is other than as specified (see 3.5.2).
l. When flap lids are not required (see 3.5.2).
m. When snug fitting boxed edges are required (see 3.5.2).
n. When end doors are required (see 3.5.3).
o. When sliding end doors are required (see 3.5.3.1).
p. When cleaning, treatment, and painting shall be MIL-T-704, method A or B (see 3.7).
q. Color of finish coat required (see 3.7).
r. When protective coating is required (see 3.7.1).
s. When special marking is required (see 3.10).
t. Level of packing required (see 5.1).

6.3 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL) and invokes the provisions of paragraph 7-104.9(n) of the Defense Acquisition Regulations (DAR), the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL (DD Form 1423) incorporated into the contract. When the provisions of DAR 7-104.9(n) are not invoked, the data shall be delivered in accordance with the contract requirements.

6.4 First article. When a first article inspection is required, the item will be tested and should be a first article sample. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - ME
Navy - YD

Review activity:

DLA - GS

Preparing activity:

Navy - YD

Project No. 3990-0163

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:28Z
Check the source to verify that this is the current version before use.

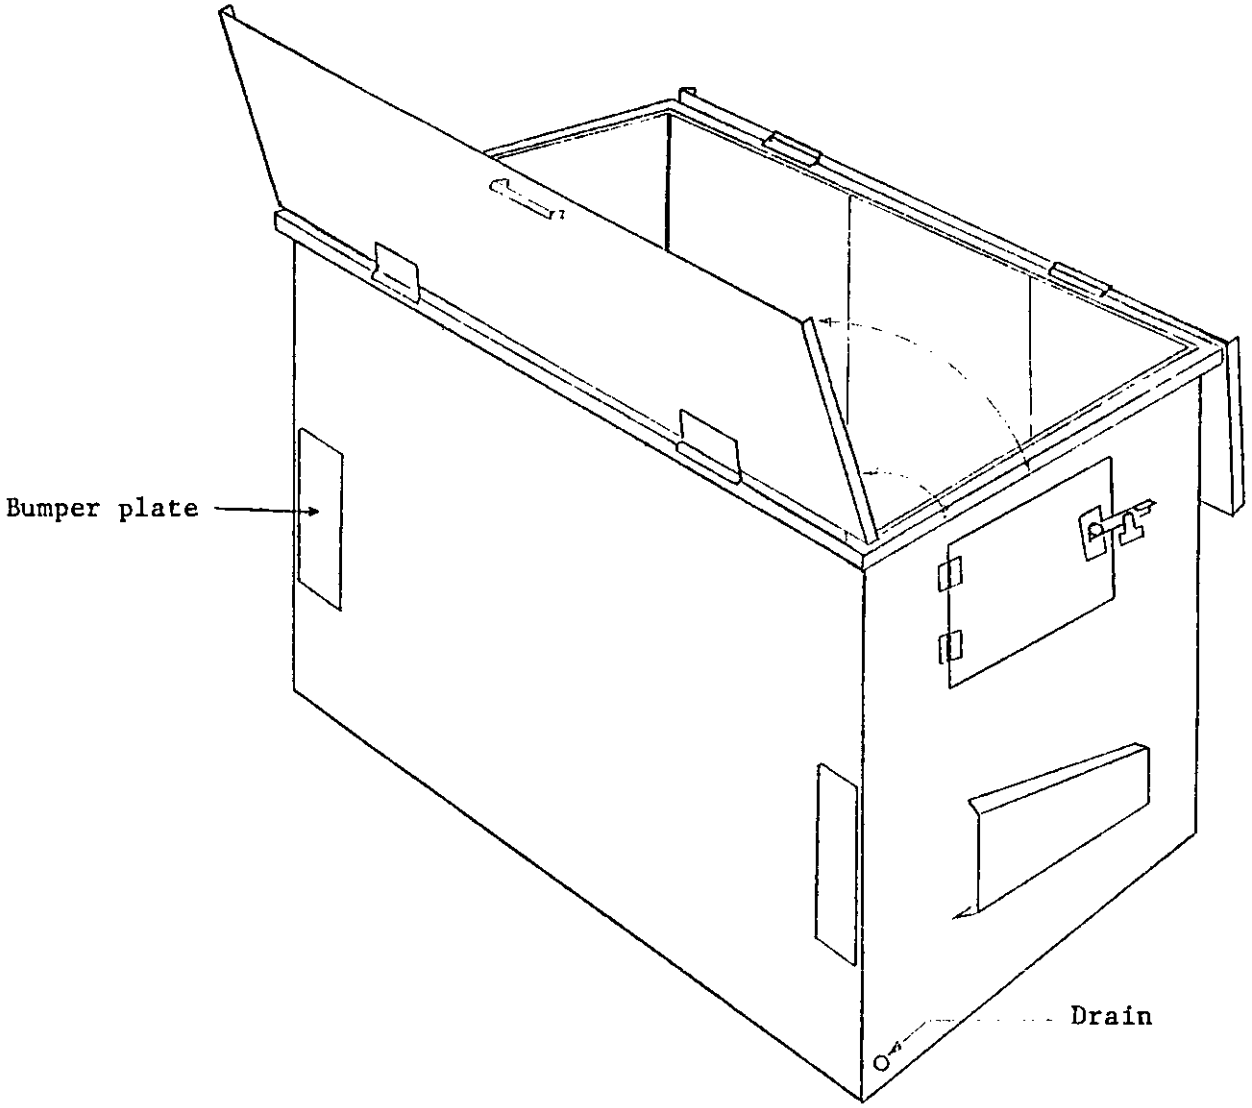


FIGURE 1. Class I, type A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:28Z
Check the source to verify that this is the current version before use.

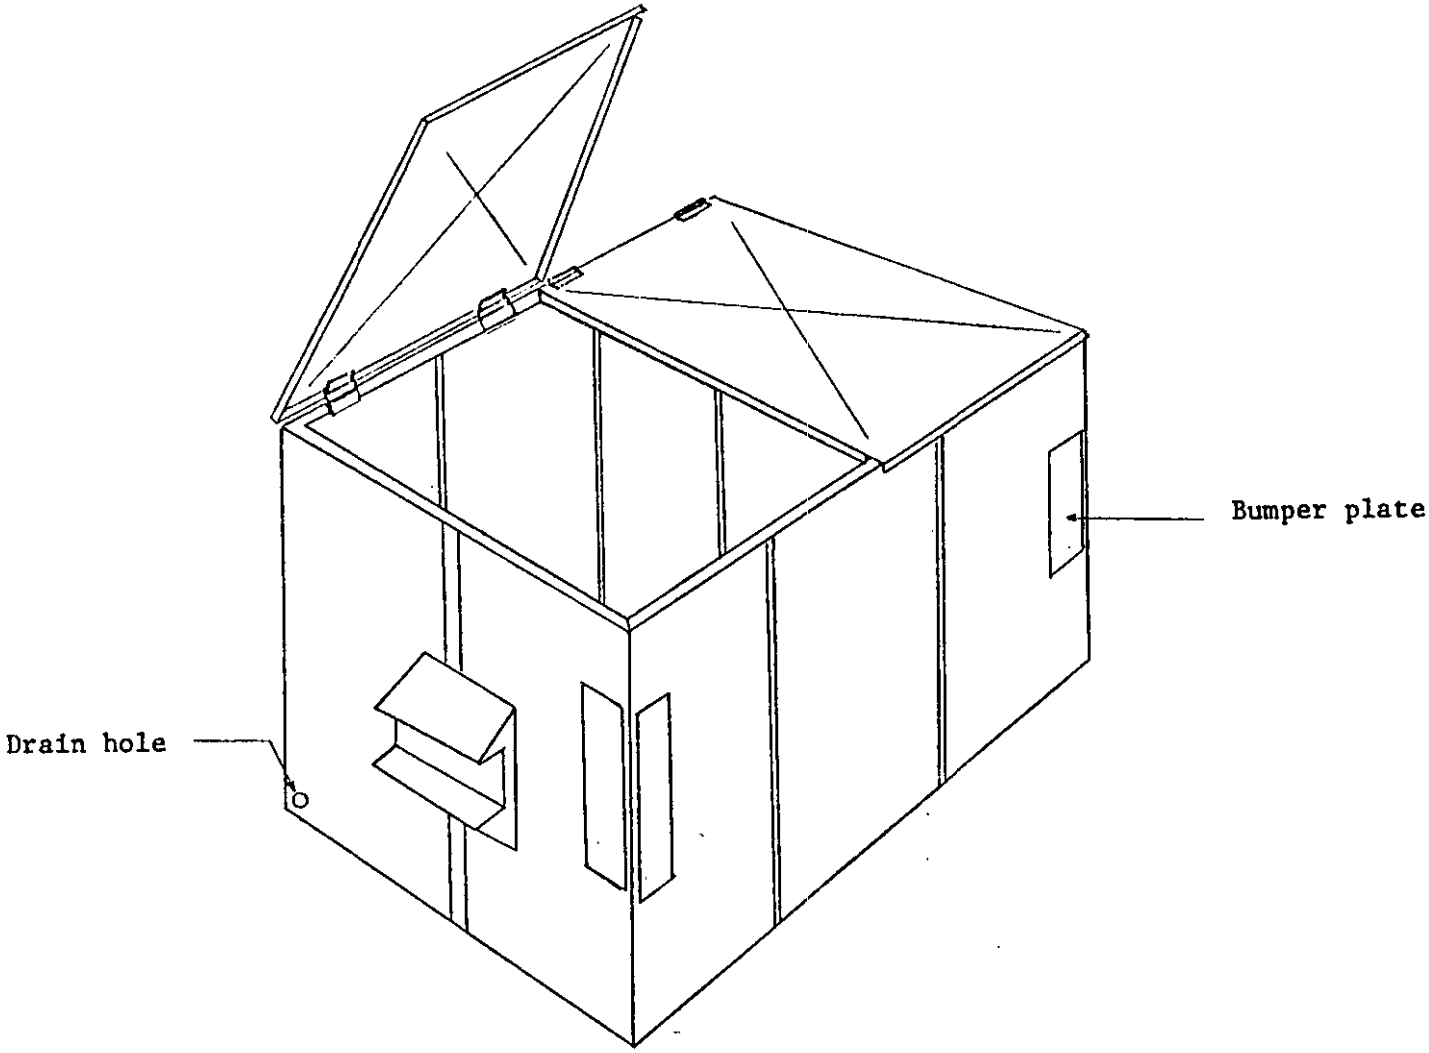


FIGURE 2. Class I, type B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:28Z
Check the source to verify that this is the current version before use.

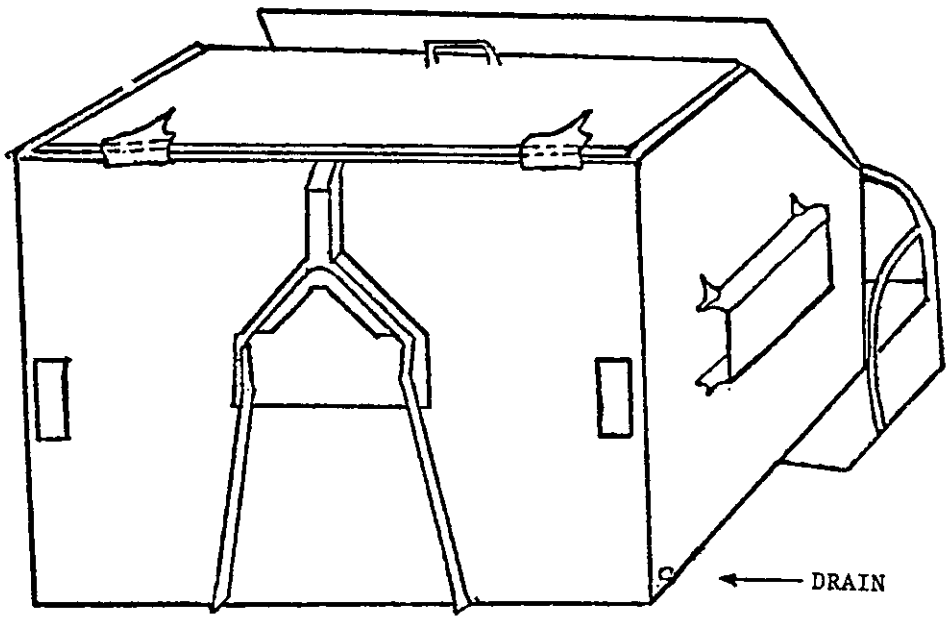


FIGURE 3. Class II, type C.

Source: https://assist.dla.mil -- Downloaded: 202610-19T18:28Z
Check the source to verify that this is the current version before use.


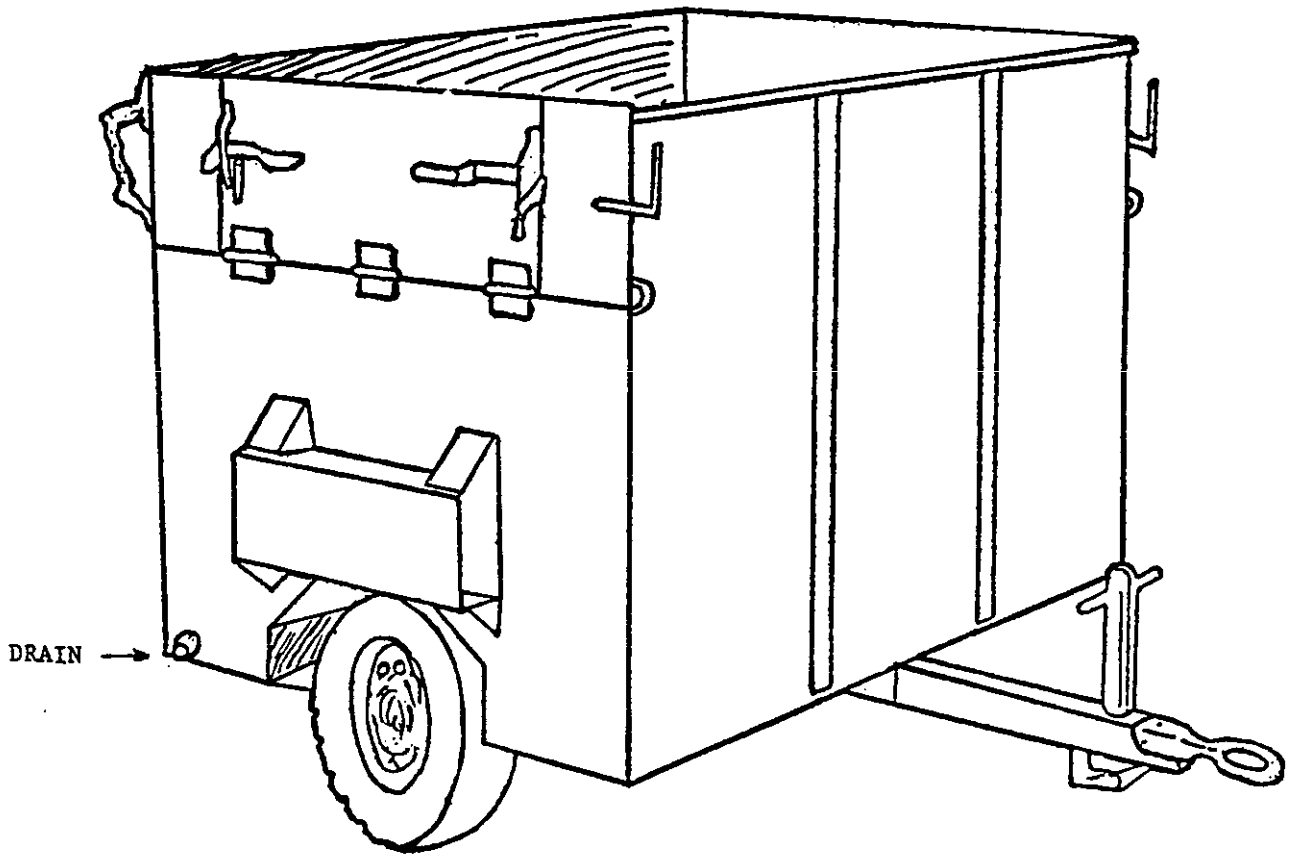


FIGURE 4. Class I, type D.

Source: https://assist.dla.mil -- Downloaded: 202610-19T18:28Z
Check the source to verify that this is the current version before use.

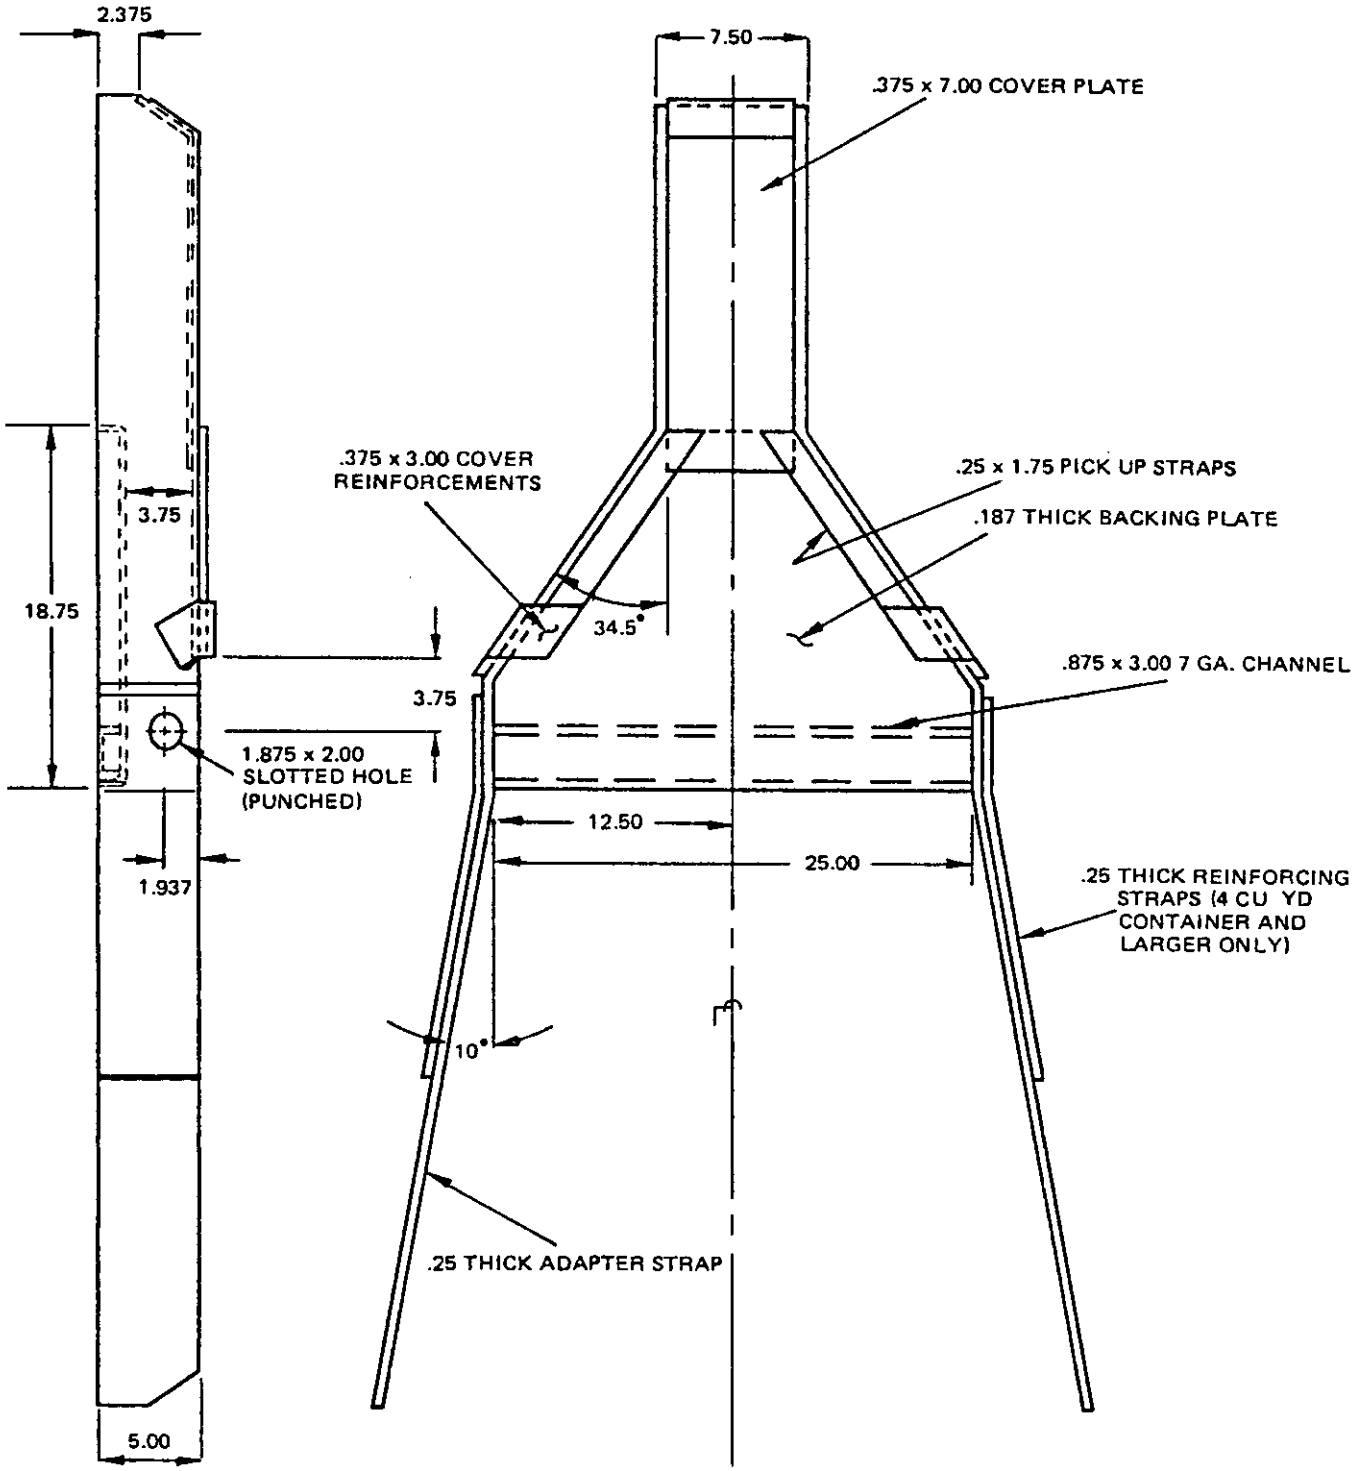

☆ U.S. GOVERNMENT PRINTING OFFICE: 1983—605-034/2872

FIGURE 5. Single point container hoisting attachment.

Source: https://assist.dla.mil -- Downloaded: 202610-19T18:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side) 3990-0163

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-R-23954D	REFUSE CONTAINERS, HOISTING UNIT; TILT-OVER FOR FRONT LOADING COMPACTION TYPE TRUCKS

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:28Z
Check the source to verify that this is the current version before use.