INCH-POUND


MIL-C-15370/19
22 September 1989


MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL, FLAT PACK


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

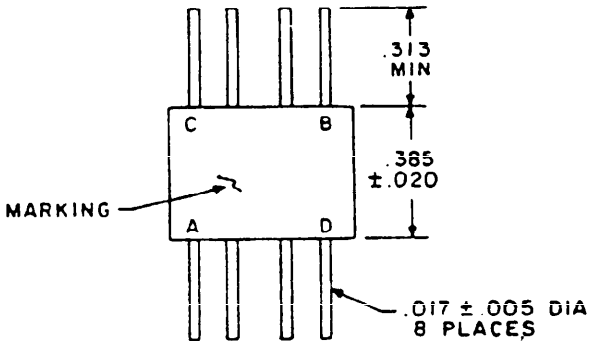

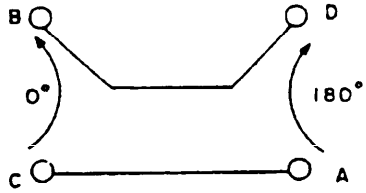

REFERENCE SCHEMATIC

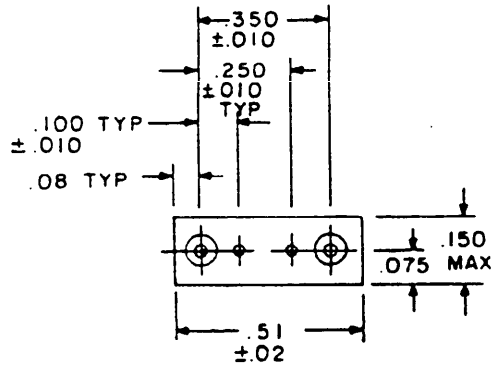


Inches	mm
.005	0.13
.010	0.25
.017	0.43
.020	0.51
.075	1.90
.08	2.0
.100	2.54
.150	3.81
.250	6.35
.313	7.95
.350	9.39
.385	9.78
.51	12.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Pins not marked are grounded.
4. Terminal identification need not appear on couplers. Terminal A shall be identified by a mechanical index on the head or body, or a mark on the flat surface of the coupling within the region shown.

FIGURE 1. Dimensions and configuration for part numbers M15370/19-001 and M15370/19-002.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

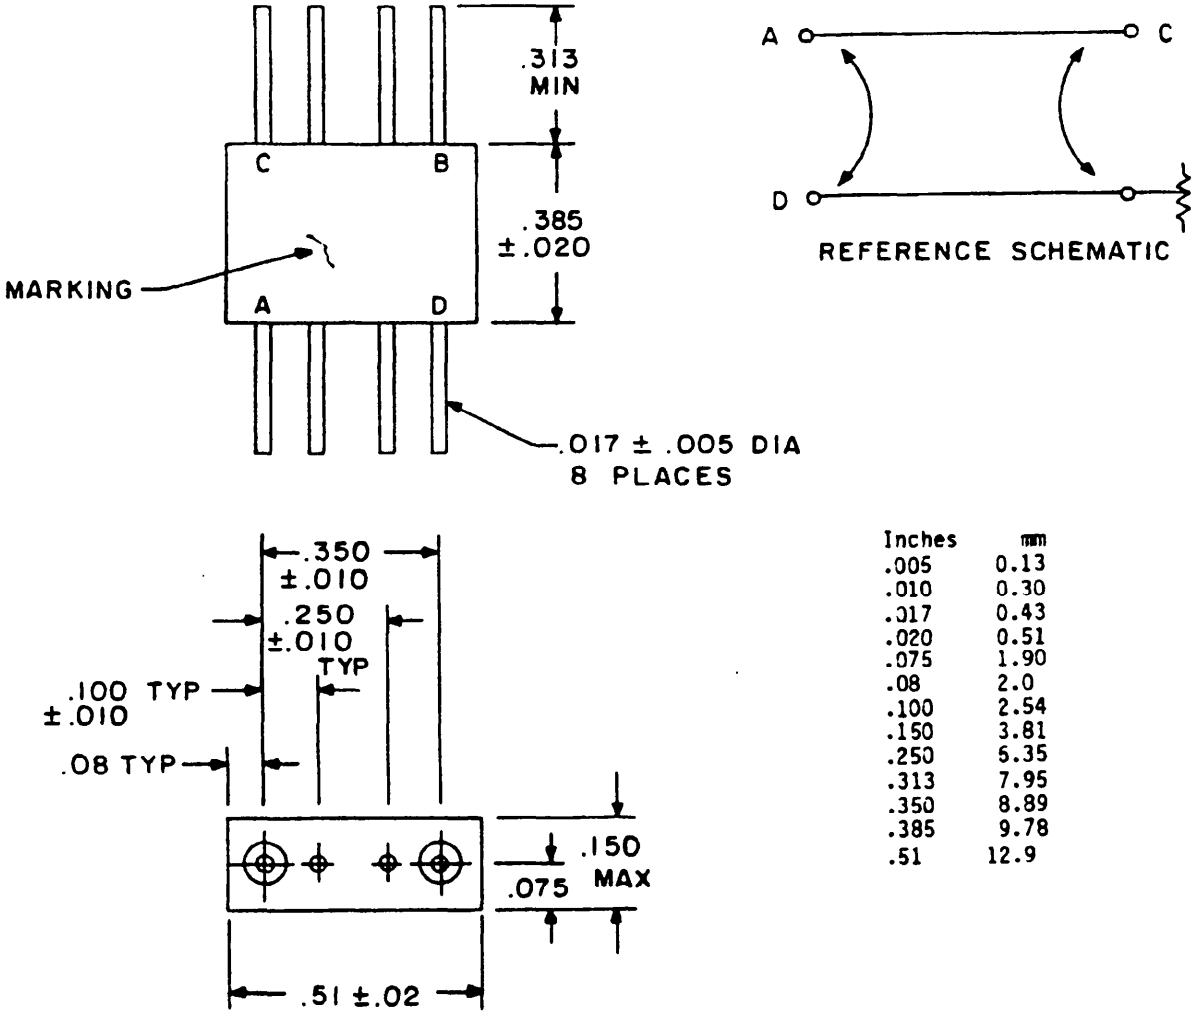

Inches	mm
.005	0.13
.010	0.30
.017	0.43
.020	0.51
.075	1.90
.08	2.0
.100	2.54
.150	3.81
.250	6.35
.313	7.95
.350	8.89
.385	9.78
.51	12.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Pins not marked are grounded.
4. Terminal identification need not appear on couplers. Terminal A shall be identified by a mechanical index on the head or body, or a mark on the flat surface of the coupling within the region shown.

FIGURE 2. Dimensions and configuration for part numbers M15370/19-003 through M15370/19-011.

Source: https://assist.dla.mil -- Downloaded: 20261O-18T06:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	Insertion loss (dB) max	VSWR max		RF input power to primary	
		Nominal	Tolerance				Primary line	Secondary line	Over frequency range	Avg
	MHz								Watts	Watts
001N S	1 - 100	20.25	±0.2	±0.2	20	0.3	1.10:1	1.10:1	1 - 100 MHz	3
002N S	10 - 500	10	±0.7	±0.5	20	1.1	1.50:1	1.50:1	10 - 500 MHz	1
003N S	10 - 500	20	±1.0	±0.5	20	0.5	1.30:1	1.30:1	10 - 500 MHz	3
004N S	10 - 100	10	±0.25	±0.25	25	0.5	1.20:1	1.20:1	10 - 100 MHz	3
005N S	10 - 500	10	±0.25	±0.25	25	0.5	1.20:1	1.20:1	10 - 500 MHz	3
006N S	10 - 500	20.25	±0.25	±0.25	20	0.35	1.20:1	1.20:1	10 - 500 MHz	3
007N S	293 - 343	20	±0.5	±0.25	30	0.35	1.20:1	1.20:1	293 - 343 MHz	3
008N S	600 - 800	20	±2.0	±0.5	20	0.8	1.40:1	1.40:1	600 - 800 MHz	3
009N S	10 - 1000	14	±0.35	±0.35	25	0.75	1.30:1	1.30:1	10 - 1000	3
010N S	10 - 1000	15	±0.35	±0.35	25	0.5	1.30:1	1.30:1	10 - 1000	3
011N S	10 - 1000	20.25	±0.35	±0.35	20	0.5	1.30:1	1.30:1	10 - 1000	3

Source: https://assist.dla.mil -- Downloaded: 20260-18T06:12Z
Check the source to verify that this is the current version before use.

TABLE II. Physical and environmental characteristics. 1/

Dash no.	Weight (grams)	Temperature range (operating on top nonoperating on the bottom)	Thermal shock, method 107	Vibration, high-frequency, method 204	Shock (specified pulse), method 213	Seal, method 112	Solder-ability, method 208	Resistance to soldering heat, method 210	Terminal strength, method 211
001	3.0	-55°C to +100°C -65°C to +125°C	---	D	C	D	---	B	---
002	3.0	-54°C to +85°C -65°C to +100°C	---	D	C	D	---	B	---
003	3.0	-55°C to +100°C -65°C to +125°C	---	D	C	D	---	B	---
004	3.0	-55°C to +100°C -65°C to +125°C	---	D	C	D	---	B	---
005	3.0	-55°C to +100°C -65°C to +125°C	---	D	C	D	---	B	---
006	3.0	-55°C to +100°C -65°C to +125°C	---	D	C	D	---	B	---
007	3.0	-55°C to +100°C -65°C to +125°C	---	D	C	D	---	B	---
008	3.0	-55°C to +100°C -65°C to +125°C	---	D	C	D	---	B	---
009	3.0	-55°C to +100°C -65°C to +125°C	---	D	C	D	---	B	---
010	3.0	-55°C to +100°C -65°C to +125°C	---	D	C	D	---	B	---
011	3.0	-55°C to +100°C -65°C to +125°C	---	D	C	D	---	B	---

1/ Letters denote test conditions of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026/10-18T06:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 and 2.

Electrical: See table I.

Physical and environmental characteristics: See table II.

Weight: See table II.

Marking: Part numbers shall be located as shown on figures 1 and 2.

Part number: M15370/19- (and a dash number from table I).

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table III. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part number.

TABLE III. Substitution data.

Part number M15370/19-	Manufacturer's code	Manufacturer's part number	NSN 5985
001	32252	FP-D4-20H	01-158-4467
002	21912	CH134	01-067-1203
003	21912	CH135	---
003	32252	FP-D4-20U	01-105-6203
004	32252	FP-D3-10V	01-164-9143
004	12457	CRF-10A-250	
005	32252	FP-D3-10U	
006	32252	FP-D3-20U/B	01-182-8264
007	32252	FP-D3-20V	
008	94117	295030P1	
009	32252	FP-D3-14G	01-202-8665
010	32252	FP-D3-15G	01-175-8665
011	32252	FP-D3-20G	

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.