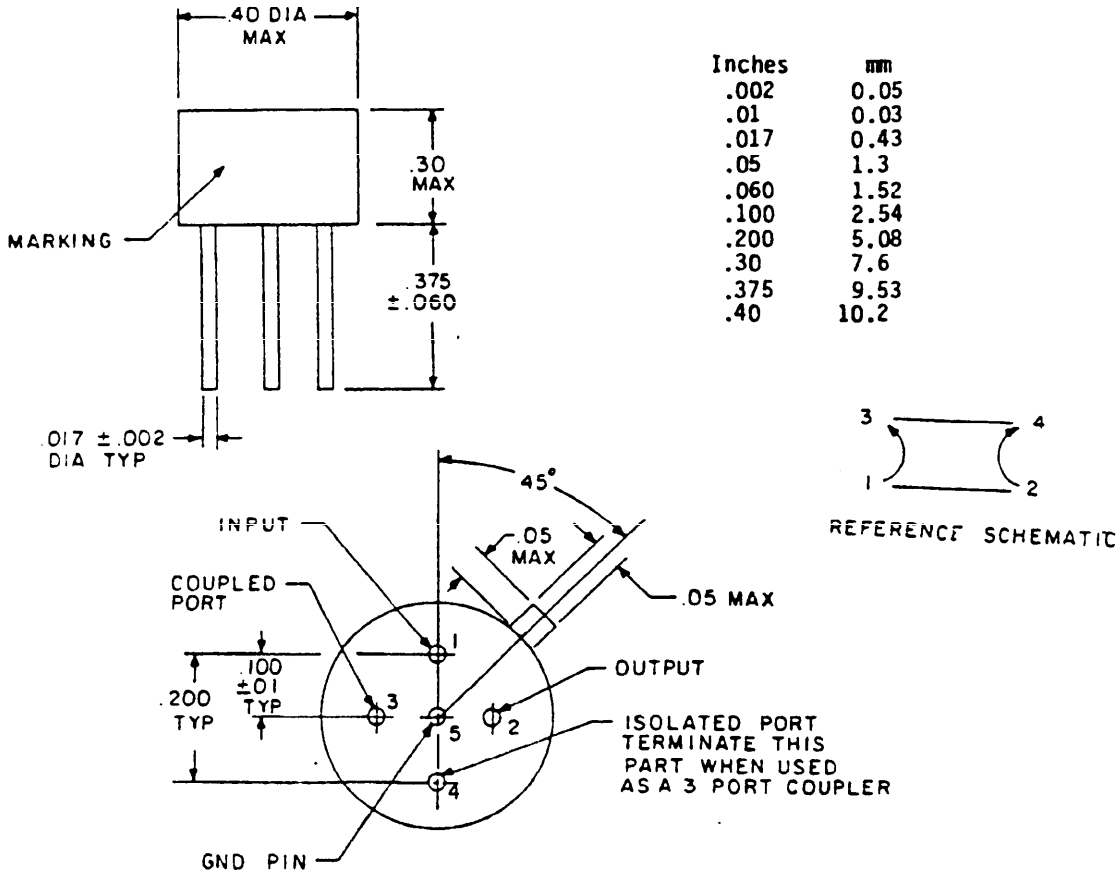
MILITARY SPECIFICATION SHEET

# COUPLERS, DIRECTIONAL, TO CONFIGURATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.




| Inches | mm |
|---|---|
| .002 | 0.05 |
| .01 | 0.03 |
| .017 | 0.43 |
| .05 | 1.3 |
| .060 | 1.52 |
| .100 | 2.54 |
| .200 | 5.08 |
| .30 | 7.6 |
| .375 | 9.53 |
| .40 | 10.2 |



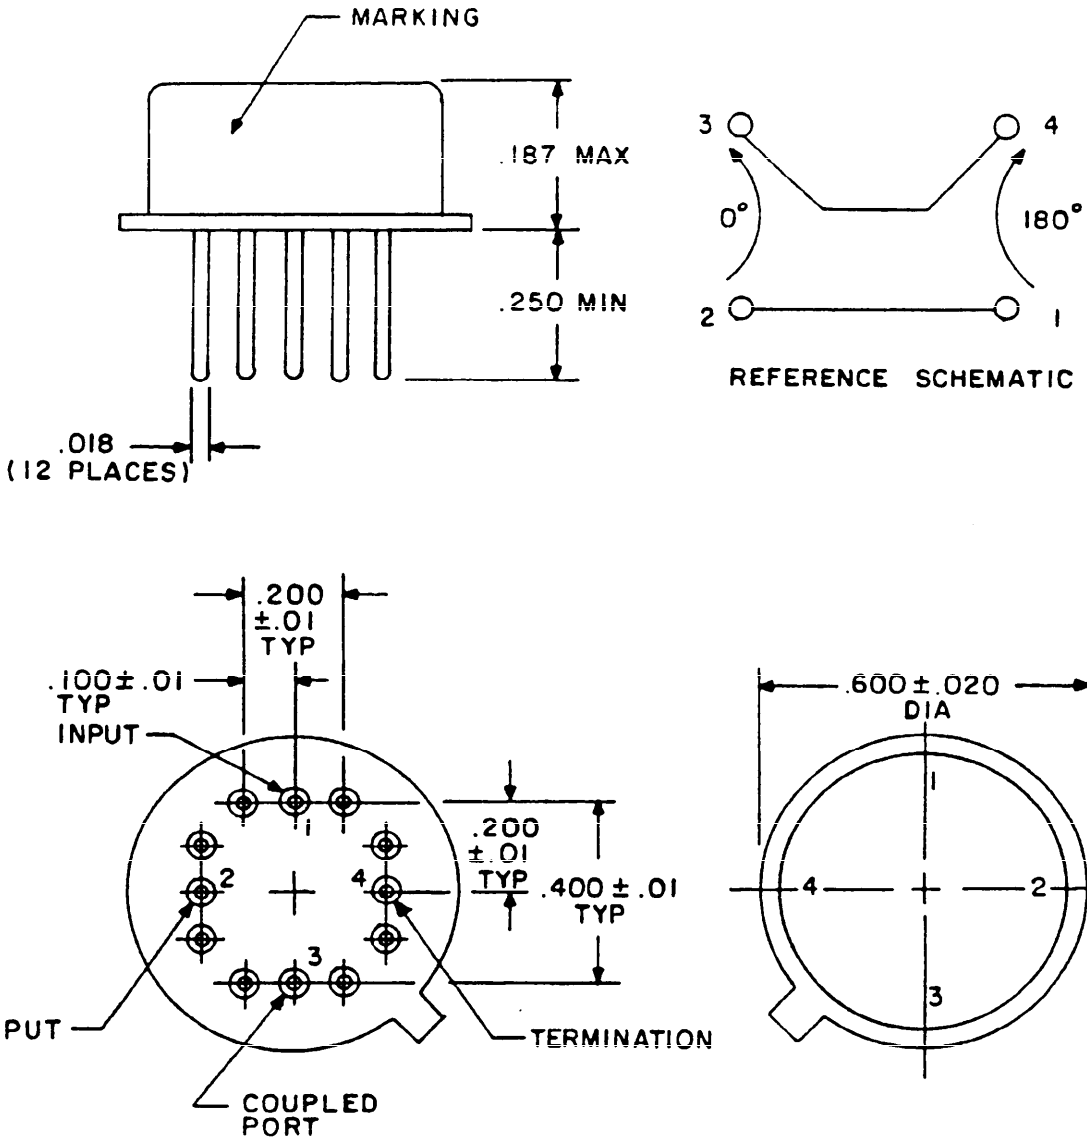

REFERENCE SCHEMATIC

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 1. Dimensions and configuration for part numbers M15370/20-001 through M15370/20-006.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:13Z
Check the source to verify that this is the current version before use.




NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All unmarked pins are grounded to case.

| Inches | mm |
|---|---|
| .01 | 0.3 |
| .018 | 0.46 |
| .020 | 0.51 |
| .100 | 2.54 |
| .200 | 5.08 |
| .250 | 6.35 |
| .400 | 10.20 |
| .600 | 15.24 |

FIGURE 2. Dimensions and configuration for part numbers M15370/20-007 and M15370/20-009.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:13Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

| Dash number | Frequency range | Coupling (dB) | | Coupling variation (dB) max | Effective directivity (dB) min | Insertion loss (dB) max | VSWR max | | RF input power to primary | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | Nominal | Tolerance | | | | Primary line | Secondary line | Over frequency range | Avg |
| | MHz | | | | | | | | MHz | Watts |
| 001N S | 1 - 100 | 6 | ±0.5 | ±0.25 | 25 | 0.8 | 1.30:1 | 1.30:1 | 10 - 100 | 1 |
| 002N S | 100 - 200 | 6 | ±0.5 | ±0.25 | 25 | 0.8 | 1.30:1 | 1.30:1 | 100 - 200 | 1 |
| 003N S | 5 - 500 | 10 | ±1.0 | ±0.5 @ 10-200 MHz<br>±0.7 @ 5-500 MHz | 20 @ 10-200 MHz<br>15 @ 5-500 MHz | 0.6 @ 10-200 MHz<br>1.0 @ 5-500 MHz | 1.30:1 @ 10-200 MHz<br>1.50:1 @ 5-500 MHz | 1.30:1 @ 10-200 MHz<br>1.50:1 @ 5-500 MHz | 5 - 500 | 1 |
| 004N S | 5 - 500 | 20 | ±1.0 | ±0.5 @ 10-200 MHz<br>±0.7 @ 5-500 MHz | 20 @ 10-200 MHz<br>15 @ 5-500 MHz | 0.6 @ 10-200 MHz<br>1.0 @ 5-500 MHz | 1.30:1 @ 10-200 MHz<br>1.50:1 @ 5-500 MHz | 1.30:1 @ 10-200 MHz<br>1.50:1 @ 5-500 MHz | 5 - 500 | 1 |
| 005N S | 750 - 1250 | 6 | ±1.0 | ±0.7 | 18 | 2.3 | 1.50:1 | 1.50:1 | 750 - 1250 | 0.25 |
| 006N S | 750 - 1250 | 20 | ±1.0 | ±0.5 | 18 | 1.0 | 1.50:1 | 1.50:1 | 750 - 1250 | 0.25 |
| 007N S | 10 - 500 | 20 | ±1.0 | ±0.5 | 17 | 0.6 | 1.30:1 | 1.30:1 | 10 - 500 | 3 |
| 008N S | 10 - 600 | 20 | ±1.0 | ±0.5 | 17 | 0.6 | 1.30:1 | 1.30:1 | 10 - 500 | 3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:13Z
Check the source to verify that this is the current version before use.

TABLE II. Physical and environmental characteristics. 1/

| Dash no. | Weight oz. (max) | Temperature range (operating on top nonoperating on the bottom) | Thermal shock, method 107 | Vibration, high-frequency, method 204 | Shock (specified pulse), method 213 | Seal, method 112 | Solder-ability, method 208 | Resistance to soldering heat, method 210 | Terminal strength, method 211 |
|---|---|---|---|---|---|---|---|---|---|
| 001 | 0.07 | -55°C to +105°C<br>-65°C to +125°C | --- | --- | --- | D | --- | D | --- |
| 002 | 0.07 | -55°C to +105°C<br>-65°C to +125°C | --- | --- | --- | D | --- | D | --- |
| 003 | 0.07 | -55°C to +105°C<br>-65°C to +125°C | --- | --- | --- | D | --- | D | --- |
| 004 | 0.07 | -55°C to +105°C<br>-65°C to +125°C | --- | --- | --- | D | --- | D | --- |
| 005 | 0.07 | -55°C to +105°C<br>-65°C to +125°C | --- | --- | --- | D | --- | D | --- |
| 006 | 0.07 | -55°C to +105°C<br>-65°C to +125°C | --- | --- | --- | D | --- | D | --- |
| 007 | 0.14 | -55°C to +105°C<br>-65°C to +125°C | --- | --- | --- | D | --- | D | --- |
| 008 | 0.14 | -55°C to +105°C<br>-65°C to +125°C | --- | --- | --- | D | --- | D | --- |

1/ Letters denote test conditions of MIL-STD-202.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 and 2.

Electrical: See table I.

Physical and environmental characteristics: See table II.

Weight: See table II.

Marking: Part numbers shall be located as shown on figures 1 and 2.

Part number: M15370/20- (and a dash number from table I).

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table III. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part number.

TABLE III. Substitution data.

| Part number M15370/20- | Manufacturer's code | Manufacturer's part number | NSN 5985 |
|---|---|---|---|
| 001 | 53711 | 5616782-13 | --- |
| 001 | 12457 | C-147/52269 | --- |
| 002 | 97942 | 584R070H03 | 01-160-1083<br>01-168-6093 |
| 003 | 97942 | 584R070H01 | 01-093-9408 |
| 003 | 53711 | 5616782-14 | --- |
| 003 | 72314 | 1275-258 | 01-083-5006 |
| 003 | 12457 | C-114 | 01-083-5006 |
| 003 | 94987 | 198113-1 | --- |
| 003 | 12457 | C-114 | --- |
| 003 | 97871 | 550-5714-001 | --- |
| 003 | 12457 | 550-5714-001 | --- |
| 003 | 12813 | 645013-1 | --- |
| 003 | 12457 | C-114 | --- |
| 003 | 94117 | 292340P1 | 01-165-0906 |
| 003 | 12457 | C-114-17 | 01-165-0906 |
| 003 | 05869 | 712476 | --- |
| 003 | 12457 | C-114-2 | --- |
| 003 | 53711 | 5399699-2 | --- |
| 003 | 12457 | C-114 | --- |
| 004 | 53711 | 5616782-15 | --- |
| 004 | 12457 | C-115/52271 | --- |
| 004 | 97942 | 584R070H02 | 01-156-9834 |
| 004 | 94117 | 292340P2 | --- |
| 004 | 12457 | C-115-10 | --- |
| 004 | 05869 | 712476-2 | --- |
| 004 | 12457 | C-115-1 | 01-138-3937 |
| 004 | 53711 | 5399699-1 | --- |
| 004 | 12457 | C-115 | --- |
| 004 | 95542 | 121-134-0001 | --- |
| 004 | 97871 | 550-5716-001 | --- |
| 004 | 57957 | C5132623-1 | --- |
| 004 | 57958 | 5071556-2 | --- |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:13Z
Check the source to verify that this is the current version before use.

TABLE III. Substitution data - Continued.

| Part number M15370/20- | Manufacturer's code | Manufacturer's part number | NSN 5985 |
|---|---|---|---|
| 004 | 12457 | CRT-20-450/28256 | --- |
| 004 | 91417 | 146419-101 | --- |
| 005 | 57958 | 5071556-3 | --- |
| 005 | 12457 | CRT-6-975/28249 | --- |
| 006 | 57958 | 5071556-1 | --- |
| 006 | 12457 | CRT-20-975/28179 | --- |
| 007 | 88379 | 110D015-1 | --- |
| 007 | 21912 | CH-139(8839) | --- |
| 007 | 96215 | 2487300-001 | --- |
| 007 | 21912 | CH-697 | --- |
| 008 | 94117 | 295025P1 | --- |
| 008 | 21912 | CH-688 | --- |

## CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-17)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:13Z
Check the source to verify that this is the current version before use.