MIL-C-15507L(NU)
25 April 1986
SUPERSEDING
MIL-C-15507K(NU)
13 August 1981

MILITARY SPECIFICATION

CAP, GARRISON, WOMAN'S (NAVY)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a woman's garrison cap.

* 1.2 Classification. The cap shall be of one type (Type III) in the following sizes (see 6.2):

Schedule of sizes

20, 20-1/2, 21, 21-1/2, 22, 22-1/2, 23, 23-1/2, and 24

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:17Z
Check the source to verify that this is the current version before use.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction 2 Way and 4 Way Entry
CCC-C-476	- Cloth, Bunting, Nylon, and Nylon and Wool
DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-3738	- Cloth, Elastique, Wool
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-E-20652	- Eyelets, Metallic, and Eyelet Washers, Metallic, General Specification For
MIL-C-24910	- Cloth, Tropical: Polyester and Wool
MIL-T-43548	- Thread, Polyester, Cotton-Covered and Rayon Covered

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-902	- Provisions for Evaluating Quality of Caps, Garrison, Women's

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:17Z
Check the source to verify that this is the current version before use.

US POSTAL SERVICE MANUAL

(Copies of manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION
OF TEXTILE CHEMISTS AND COLORISTS

Test Method - 135-1978 - Dimensional Changes in Automatic Home Laundering of Woven and Knit Fabrics

(Applications for copies should be addressed to the AATCC, P.O. Box 12215 Research Triangle Park, NC 27709.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.
Standard Shades for Threads - 1968

(Applications for copies of color cards should be addressed to the Color Association of the U.S., 343 Lexington Ave., New York, NY 10016.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:17Z
Check the source to verify that this is the current version before use.

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

* 3.3.1 Basic material. The basic material to be used for the crown side, crown top (gusset) and apron pieces of the garrison cap (see 3.5.1), shall be a polyester and wool tropical cloth conforming to MIL-C-24910. The material shall be dyed to match Blue Shade 3346.

* 3.3.2 Cloth, nylon, bunting. The nylon bunting cloth used for the sweatband of the cap (see Table II, operation 1c), shall conform to type I, class A, of CCC-C-476 except that the colorfastness requirements specified therein shall not apply. The cloth shall be dyed a suitable black shade, and shall show "good" fastness to dry cleaning and laundering when tested as specified in 4.4.1.

* 3.3.3 Fusible lining. The material for lining the apron, crown top (gusset) and crown side pieces shall be a fusible lining material, woven, non-woven, or knitted, dyed a suitable black or gray shade, and shall have a thickness of not greater than 0.030 inch. The fused basic material shall conform to the requirements of Table I when tested as specified in 4.4.1.

Table I - Finished fusible requirements

Characteristic	Requirement
Appearance of fused sample:	
Initial	No evidence of bubbling, color change or bleed-through
After 5 dry cleanings	No evidence of bubbling or delamination
After 5 launderings	No evidence of bubbling or delamination
Peel strength	
Initial	23 oz/inch width (min)
After 5 dry cleanings	18 oz/inch width (min)
After 5 launderings	18 oz/inch width (min)

* 3.3.4 Thread. The thread for seaming and stitching the garrison cap shall be a cotton-covered or rayon-covered polyester thread conforming to 2 or 3 ply, ticket No. 50 or 70 or MIL-T-43548. As an alternate, a cotton thread conforming to Type I, IC2, Ticket Nos. A, 0, and 00, 3-ply or V-T-276 may be used. The thread shall be dyed to match Black AA, Cable No. 66043 in accordance with the Standard Shades for Threads.

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:17Z
Check the source to verify that this is the currentversion before use.

* 3.3.4.1 Colorfastness. The dyed thread shall show fastness to light, laundering, wet-dry cleaning, and perspiration equal to or better than the standard sample when tested as specified in V-T-276 or MIL-T-43548. When a standard sample is not available, the dyed thread shall show a minimum of "good" fastness to light, laundering, wet-dry cleaning, and perspiration, when tested as specified in V-T-276 or MIL-T-43548.

* 3.3.5 Eyelets. The eyelets shall be brass rolled flange type with a black enamel finish and shall be secured with brass washers. Eyelets shall conform to Dash No. BE 108 of MIL-E-20652/1 except that the shank end need not be scored. The inside diameter of the washers shall be .220 + .002 inch. The washers shall be an appropriate mate to the eyelets (see 6.4).

* 3.3.6 Labels. Each cap shall have a combination identification, size, and personal label and a separate instruction label in accordance with 3.3.6.1 and 3.3.6.2.

* 3.3.6.1 Combination label. Each cap shall have an identification, size, and personal label conforming to type VI, classes 4 and 10, of DDD-L-20, except that the inscription shall be as shown below. The size of the label shall be not more than 1-1/2 inches in height and 2-1/2 inches in length. The height of the lettering except for the applicable size shall be 1/16 to 1/8 inch. The size lettering shall be not less than 1/4 inch. The label shall show fastness to drycleaning and laundering.

NAME:
SERVICE NO.:
CAP, GARRISON, WOMAN'S (NAVY)
CONTRACT NO.: DLA-100-00-0-000 (EXAMPLE)
STOCK NO.: 8410-00-000-0000 (EXAMPLE)
NAME OF CONTRACTOR:
SIZE:

* 3.3.6.2 Instruction label. Each cap shall have an instruction label conforming to type VI, class 3 of DDD-L-20. The size of the label shall be not more than 1-1/2 inches in height and 2-1/2 inches in length. The size of the lettering shall be 1/8 inch. The label shall show fastness to drycleaning and laundering.

LAUNDERING INSTRUCTIONS

MACHINE WASH PERMANENT PRESS CYCLE
WARM WATER (120° F. MAX) DO NOT BLEACH
TUMBLE DRY, MEDIUM HEAT - REMOVE IMMEDIATELY
MAY ALSO BE DRY CLEANED

OR

FOLLOW NAVEDTRA 414-01-45-81, FORMULA III

3.4 Design. The cap shall be of a garrison style, completely lined with fusible material, having a three piece crown and a one piece apron turned up on the outside of the cap with the tapered ends crossing at the front. An eyelet shall be positioned on the left side of the apron. The cap shall have a sewn-on bias-cut nylon cloth sweatband.

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:17Z
Check the source to verify that this is the currentversion before use.

3.4.1 Figure. Figure 1 is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

* 3.5 Patterns. Standard patterns to be used to cut the working patterns will be furnished by the Government (see 6.3). Unless otherwise indicated in Table II, the patterns allow a 1/4 (+ 1/16) inch seam allowance. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

* 3.5.1 List of pattern parts. The cap shall be cut from material as specified, and in accordance with pattern parts indicated below:

Material	Nomenclature	Cut parts
Cloth, tropical	Crown side	2
polyester and wool	Crown top (gusset)	1
fused material 1/	Apron	1

1/ When option to cut fusible and basic cloth parts separately is chosen (see 3.7.3), the pattern parts for both the basic cloth and the fusible shall be the same as those used for the fused basic cloth, except it is recommended that the fusible parts be approximately 1/16 inch smaller all around.

3.6 Construction.

* 3.6.1 Stitches, seams, and stitchings. Stitch, seams, and stitching types, as specified in Table II shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitchings are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the cap. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. The width of the safety stitch shall be 3/8 inch and the guides and knifes on the safety stitch machine shall be set to trim only the ravelled ends of the fabric.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

* 3.6.3 Thread breaks and ends of seams. Ends of type 301 seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type. The end of type 401 stitching not caught in other stitching or seams shall have a 1/2 to 3/4 inch chain extending from it.

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:17Z
Check the source to verify that this is the currentversion before use.

* 3.7 Manufacturing operations requirements. The cap shall be manufactured in accordance with the operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations listed, provided that the finished cap is identical to that produced by following the sequence of operations as listed in Table II.

* 3.7.1 Shade and size marking. The component parts shall be marked, or ticketed to insure a uniform shade and size throughout the cap. Any method may be used except:

1. Metal fastening devices
2. Sewn-on tickets
3. Adhesive type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets.

The use of a rubber stamp, ink pad numbering machine, or pencil is acceptable provided the numbers are legible and are not visible on the outside of the cap.

3.7.2 Pressing. All pressing as required in Table II shall be performed with a steam iron or steam pressing machine.

3.7.3 Fusing. The operations for fusing the lining to the basic cloth shall be performed on a fusing press with the machine or warp direction of the fusible, whichever applies, parallel to the warp direction of the basic cloth. Fusible and basic cloth parts may be cut in separate operations, and fused in the manner specified, as long as the results obtained and methods for testing are equivalent to those for the cloth fused prior to cutting.

NOTE: Normal pressing equipment and hot head presses will not achieve the required results. The fusing equipment shall be capable of obtaining the appropriate temperature, pressure and dwell time settings recommended by the fusible material supplier. All fusing of the lining to the basic material shall be performed one layer at a time (stacking is not permitted) and according to the fusible manufacturer's instructions.

* 3.7.4 Abbreviations in table of operations. The abbreviations used in Table II are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:17Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting. *a. Prepare fused material in accordance with paragraph 3.7.3. When the option to cut separate basic material and fusible material component parts is chosen, prepare parts as required prior to stitching operations in accordance with paragraph 3.7.3. b. The component parts of the garrison cap shall be cut in strict accordance with the patterns furnished, which show size, shape, directional lines for cutting, and notches for proper assembly of all component parts. c. All component parts cut from the fused or unfused basic material shall be from one piece of material. Ends shall not be used. *d. The component parts cut from the basic cloth shall finish with the face side of the material on the outside. *e. The sweatband shall be nylon bunting, strip cut on the bias with the edges turned under at least 3/16 inch and finish in the cap, 1/2 to 3/4 inch in width. (The length will vary with the size of the cap). Splicing of pieces is not permitted.				
2.	Replacement of defective components. During the spreading, cutting, and manufacturing processes, components having material defects or damages that are classified as defects in MIL-STD-902, shall be removed from production and replaced with non-defective and properly matched components.				
3.	Shade and size marking. All component parts cut from the fused or unfused basic material shall be marked or ticketed in accordance with 3.7.1.				

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:17Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
4.	Crown top (gusset) and crown side pieces.					
	a. Fold the gusset in half in the length direction, and stitch dart on the inside 1/4 inch from folded edge at center, tapering to a point 1/2 (+ 1/4) inch from each pointed end of the crown top. Press the gusset flat with dart in folded position.	301 or 401	OSf-1	12-14	50 50	50 70
	b. Stitch each fused crown side piece to appropriate edge of gusset 1/4 inch from the raw edge in accordance with pattern notches.	301 or 401	SSa-1	12-14	50 50	50 70
	c. Overedge stitch the edges together.	503, 504 or 602	SSa-1	8-10	70	70
	d. Operations 4b and 4c may be performed in one operation by simultaneously stitching and overedging.	515, 516 or 519	SSa-2	12-14	50 70	70 (chain-stching) 70 (over-edging)
	*e. Notch crown side pieces at ends of gusset to crown side stitching, making two (2) notches (left and right) at each end of gusset piece, 1/4 (+ 1/16) inch down from gusset point. Continue stitching the front and back ends of the crown side pieces together.	301 or 401	SSz-3(a)	12-14	50 50	50 70
	f. Turn gusset and crown side seams toward the gusset piece and topstitch 1/16 inch from the folded edge.	301	LSq-2	12-14	50	50
*	g. Spread open and flat the seam allowances of the front and back ends of the crown side pieces and gusset piece and continue to topstitch 1/16 inch away from each side of the end seams.	301	SSz-3(b)	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:17Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	h. Overedge raw edge around the bottom of the crown.	503, 504 or 602	EFd-1	8-10	70	70
	i. Press crown top (gusset) and crown side pieces smooth and flat.					
5.	Apron.					
	a. Overedge top edge of apron.	503, 504 or 602	SSa-1	8-10	70	70
	b. Turn under top edge of apron 5/16 to 3/8 inch, and double needle stitch 3/16 inch gauge along turned edge with top row of stitching 1/16 inch from folded edge.	301 or 401	EFa-2	12-14	50 50	50 70
6.	Assembly.					
	*Stitch bottom edge of apron to bottom edge of crown around the circumference of the cap. The apron shall overlap the crown 1/4 to 3/8 inch with wrong sides together. Stitching shall be 1/16 to 1/8 inch from bottom edge of crown. Left side of apron shall overlap the right at center front (+ 1/8 inch) as indicated by pattern notches.	301 or 401	LSa-1	12-14	50 50	50 70
7.	Attach sweatband and combination label.					
	*a. Align the bottom edge of the sweatband with the bottom edge of the crown around the inside of the cap. Stitch the sweatband to the cap with two rows of stitching, 1/16 inch from each folded edge, simultaneously inserting and catching the bottom edge of the combination label in the top edge of stitching on the right inside crown piece, and catching the bottom edge of the instruction label in the top edge of stitching on the left inside crown piece. Overlap ends of sweatband about 1-1/4 inches at the back of the cap, and turn top end under 1/4 to 3/8 inch.	301	Combination of LSa-2 and SSaa-2	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:17Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Stitch around all the unattached edges of the labels, 1/16 inch from the edges.	301	LSbj-1	12-14	50	50
	NOTE: The label stitching shall not show above the apron on the outside of the finished cap.					
8.	Attach eyelet to apron.					
	a. Prepunch and position an eyelet on the left side of the apron with the center of the eyelet to finish 2 (+ 1/8) inches from the front of the cap, and 3/4 (+1/8) inch from the bottom edge of the apron (see 3.3.5 and figure 1).					
	b. Securely set the eyelet, backing it with a washer, without distorting or cutting the material or splitting the flange of the eyelet.					
9.	Finishing.					
	Turn apron up to finished position. All thread ends shall be trimmed, and loose threads removed from cap. All spots, stains, and shade tickets shall be removed without damaging the material.					
10.	Pressing.					
	Remove all wrinkles, press marks, and gloss on the outside. The crown top (gusset) shall not be exposed above the crown side joining seam by more than 1/8 inch, except at ends, where tolerance is 1/4 inch. The bottom edge of the cap shall have a rolled appearance without being creased, and the sweatband shall not show on the outside of the finished cap. The front and back ends of the cap shall not be creased.					

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:17Z
Check the source to verify that this is the current version before use.

* 3.8 Measurements. The finished cap shall conform to the measurements as shown in Table III. All measurements and tolerances are expressed in inches.

Table III - Sizes and finished measurements

Measurement	20	20-1/2	21	21-1/2	22	22-1/2	23	23-1/2	24
Center (Apron)									
Back(A)	1-5/8	1-11/16	1-3/4	1-13/16	1-7/8	1-15/16	2	2-1/16	2-1/8
Front(B)	2-1/8	2-1/4	2-3/8	2-1/2	2-5/8	2-3/4	2-7/8	3	3-1/8
Side(C)	2	2-1/8	2-1/4	2-3/8	2-1/2	2-5/8	2-3/4	2-7/8	3
Height of Cap(D)	3-1/4	3-3/8	3-1/2	3-5/8	3-3/4	3-7/8	4	4-1/8	4-1/2
Width of Crown(E)	2-3/8	2-9/16	2-3/4	2-15/16	3-1/8	3-5/16	3-1/2	3-3/4	3-7/8

Tolerance: ± 1/8

NOTE: A thru E refer to Figure 1

A. Measurement shall be taken from bottom folded edge of apron to top edge of apron back.
B. Measurement shall be taken from bottom folded edge of apron to top edge of apron front.
C. Measurement shall be taken at center of cap, from bottom folded edge of apron to top folded edge of apron.
D. Measurement shall be taken at center of cap, from bottom folded edge of apron to top folded edge of side crown.
E. Measurement shall be taken across the width of the crown top (gusset), piece at center of cap, from folded edge to folded edge.

3.9 Workmanship. The finished caps shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable point values specified in MIL-STD-902.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:17Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected for conformance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-902, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. A certificate of compliance shall be submitted for the color and thickness of the fusible lining material (see 3.3.3). The contractor is required to submit test reports for all other fusible material requirements. The nylon bunting cloth and the fused basic cloth shall be tested for the characteristics specified in 3.3.2 and Table I in accordance with the test methods referenced in Table IV. The requirements in Table I apply to the average results of the specimens tested. All test reports shall contain the individual values used to express the final results. The sample unit for testing the fused material shall be 3 yards, full width. Two sample units shall be taken from each end item lot, regardless of the lot size. If any unit fails to meet any test requirement specified, the entire lot of fused material shall be unacceptable. For the nylon bunting cloth, the lot size shall be expressed in units of yards, and the sample unit shall be 1/4 yard, full width. The lot of nylon bunting cloth shall be unacceptable if any unit fails to meet the test requirement specified. The sample size for the nylon bunting cloth shall be as follows:

Lot size (yards)	Sample units
800 or less	2
801 through 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 20260-18T06:17Z
Check the source to verify that this is the current version before use.

Table IV - Testing of components

Component	Characteristic	Requirement Paragraph	Test Method
Fusible lining material	Appearance of fused sample:		
	Initial	3.3.3	Visual
	After 5 dry cleanings	3.3.3	4.4.1.1 and visual
	After 5 launderings	3.3.3	AATCC 135-1978 and visual
	Peel Strength		
	Initial 1/	3.3.3	4.4.1.2
	After 5 dry cleanings	3.3.3	4.4.1.1 and 4.4.1.2
	After 5 launderings	3.3.3	AATCC 135-1978 and 4.4.1.2
Nylon bunting cloth	Colorfastness to Wet dry cleaning	3.3.2	5622
	Colorfastness to Laundering	3.3.2	5614

1/ Specimens shall be taken from same samples prepared for dry cleaning test.

4.4.1.1 Dry cleaning apparatus and procedure. Two 18 by 18 inch test specimens of the lining fused to the basic material shall be subjected to 30 minute dry cleaning cycles in a tumble jar mounted in a rotating apparatus similar to that specifed in Test Method 5500 of FED-STD-191. The dry cleaning reagents shall be a mixture of commercially available perchlorethylene solvent and petroleum sulfonate detergent. The test procedure shall be conducted as follows:

(1) Place the 2 test specimens in the tumble jar with 1500 ml solvent and 10 ml detergent. Clamp the jar and rotate at room temperature for 10 minutes.

(2) Replace the mixture with the same amount of perchlorethylene without detergent and rotate for another 10 minutes. Drain.

(3) Repeat procedure (2).

(4) Remove the test specimens and extract the excess solvent by any convenient method that will not distort the specimens. Dry for 60 minutes in a circulating air oven at 160 $\pm 5^{\circ}$F. DO NOT PRESS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:17Z
Check the source to verify that this is the current version before use.

* 4.4.1.2 Apparatus and procedure for in-process peel strength testing. The apparatus to be used for this test shall be a commercial type spring scale accurate to 0.5 oz. The procedure to be followed in performing the test shall be as follows:

(1) Three 1 x 8 inch wide strips parallel to the warp direction shall be cut from the right, middle, and left side of the check sample for peel strength testing.

(2) Separate the fusible from the basic fabric at the end of the 1 inch wide strips for a distance of 2 inches.

(3) Secure the end of the basic fabric to a lightweight clamp-like holder 1 inch or more in width and approximately 1.0 ounce in weight. Hang the clamp to the end of the spring scale.

(4) Position the fusible in another clamp 1 inch or more in width and approximately 1.0 ounce in weight and pull the fusible downwards in a vertical direction with a steady continuous motion (motion to be exerted by hand) until complete separation of the fusible from the samples. Minimum peel strength reading shall be taken visually from the spring scale. Failure of any individual strip shall indicate failure of the check sample.

NOTE: Care shall be taken not to jerk the fabric during the testing.

4.4.2 In-process inspection. Check tests shall be performed on fused fabric prior to manufacture of the caps in accordance with 4.4.2.1 through 4.4.2.3. It is required that tests be performed and results recorded every 4 hours or after fusing sufficient material to manufacture 1000 caps, whichever occurs first. When the option to cut basic material and fusing material separately and then use them together is utilized, tests shall be performed and results recorded every 4 hours or every 1000 caps, whichever occurs first.

4.4.2.1 Appearance of fused sample. All fabric fused at one time on the press(es) shall be examined visually. Any evidence of color change, bleed-through or bubbling constitutes failure of check sample (see 4.4.2.3).

4.4.2.2 Peel strength. The method for testing shall be as specified in 4.4.1.2. A sample fails when the lowest result for any of the specimens is less than the minimum required (see 4.4.2.3).

4.4.2.3 Failure of check samples. If a check sample fails because of inappropriate temperature, pressure or dwell time of the press, or operator error, the sample shall be re-fused and re-tested after correction of the fault. If the check sample fails a second time, all fusing performed on that press since the last passable check test shall be rejected. If the second check test passes, all previous fusing is required to be re-fused before it may be used in production of the caps.

Source: https://assist.dla.mil -- Downloaded: 20260-18T06:17Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of the end item. Examination of the end item shall be in accordance with MIL-STD-902 and in accordance with the following:

Defect	Point Value
a. Accuracy of seaming	
1. Wrong or varying shades of thread on outside	1

* 4.4.4 Examination of packaging requirements. Examination of packaging requirements shall be in accordance with MIL-STD-902.

* 4.4.5 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation packaging. Preservation packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each cap shall be inserted into a snug-fitting, flat style, clear polyethylene film bag of 0.00125 inch thickness (±25 percent tolerance). The bag may be fabricated from polyethylene film tubing or sheeting. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The open end of the polyethylene bag shall not be sealed, and shall extend approximately one inch beyond the end of the cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:17Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Caps shall be preserved-packed to afford adequate protection against deterioration and physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Thirty-five (35) caps of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Thirty-five (35) caps of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled closed and reinforced conforming to type CF, class domestic, variety DW, grade 200, size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethelene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

CAP, GARRISON, WOMAN'S (NAVY)
STOCK NUMBER:
SIZE:
QUANTITY:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:17Z
Check the source to verify that this is the current version before use.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 4 by 5 inches with the words "Mixed Sizes" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 of wood group I, II, III, or IV, Grade A of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The caps are intended for wear by both female enlisted and officer personnel of the Navy.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Size and type required (see 1.2).
c. When first article inspection is required (see 3.2), the item will be tested and should be a first article sample. The Contracting Officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When palletization is required (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1).

* 6.4 Washers and eyelets. Style C62 washers from Stimpson Company, Inc., 900 Sylvan Avenue, Bayport, NY 11705 is acceptable for use with the specified eyelet.

* 6.5 Aviation green garrison caps of elastique wool material (Type I, 19 oz. of MIL-C-3738, Shade Marine Corps 705) are available as part of the US Navy Aviation Working Uniform and shall meet the requirements specified through the NCTRF Certification Program.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:17Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.


Custodian:
Navy - NU


Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8410-N613

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:17Z
Check the source to verify that this is the current version before use.

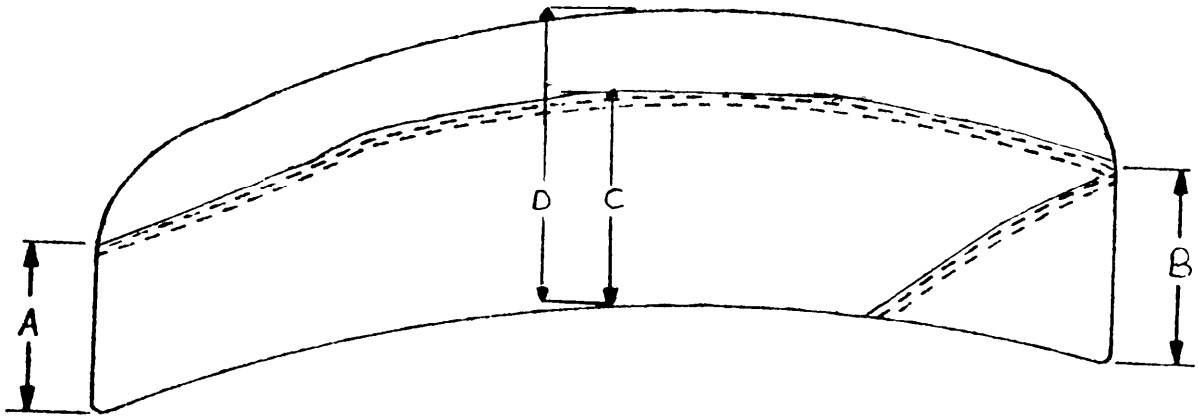



TOP VIEW OF CROWN TOP (GUSSET)

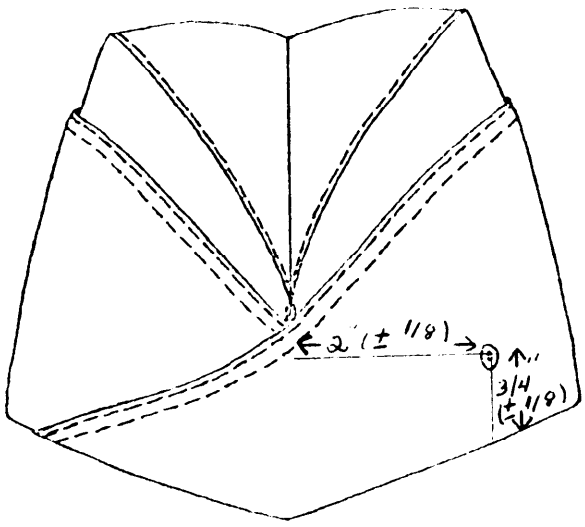


FIGURE 1 CAP, GARRISON, WOMAN'S (NAVY)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:17Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
Code 50
21 Strathmore Road
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-15507L(NU)	CAP, GARRISON, WOMAN'S (NAVY)

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:17Z
Check the source to verify that this is the current version before use.