
MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (PIN PLUG-IN TERMINATION)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the couplers described herein shall consist of this document and the latest issue of Specification MIL-C-15370.

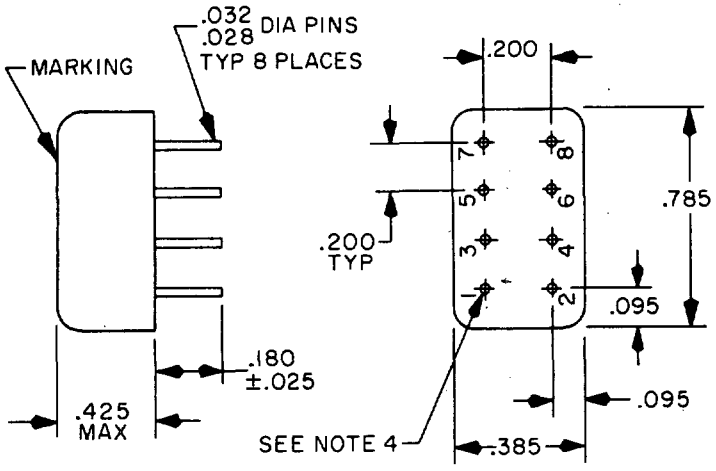

INCHES	MM
.016	.41
.025	.64
.028	.71
.032	.81
.095	2.41
.180	4.57
.200	5.08
.385	9.78
.425	10.80
.785	19.94


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Pin numbers are shown for reference - need not appear on the part.
4. Insulator around pin 1 shall be contrasting color.
5. Unless otherwise specified, tolerance is ±.016 (.41 mm).
6. Termination for P/N M15370/18-001, -002, -003, and -008:

   Input - pin 1
   Coupled output - pin 3
   Output - pin 4
   Ground - pin 2, 5, 7, and 8
   Pin 6 is not used in the circuit.

FIGURE 1. Dimensions and configurations for part numbers M15370/18-001, -002, -003, and -008.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

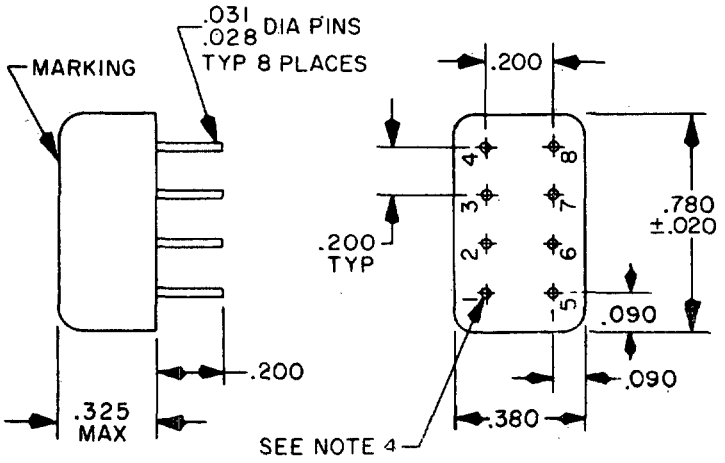


INCHES	MM
.020	.51
.028	.71
.031	.79
.090	2.29
.200	5.08
.325	8.26
.380	9.65
.780	19.81

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Pin numbers are shown for reference - need not appear on the part.
4. Insulator around pin 1 shall be a contrasting color.
5. Unless otherwise specified, tolerance is ±.016 (.41 mm).
6. Termination for P/N M15370/18-004:

   Input - pin 1
   Coupled output - pin 4
   Output - pin 5
   Ground - pins 2, 3, 6, 7, and 8.

FIGURE 2. Dimensions and configuration for part number M15370/18-004.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

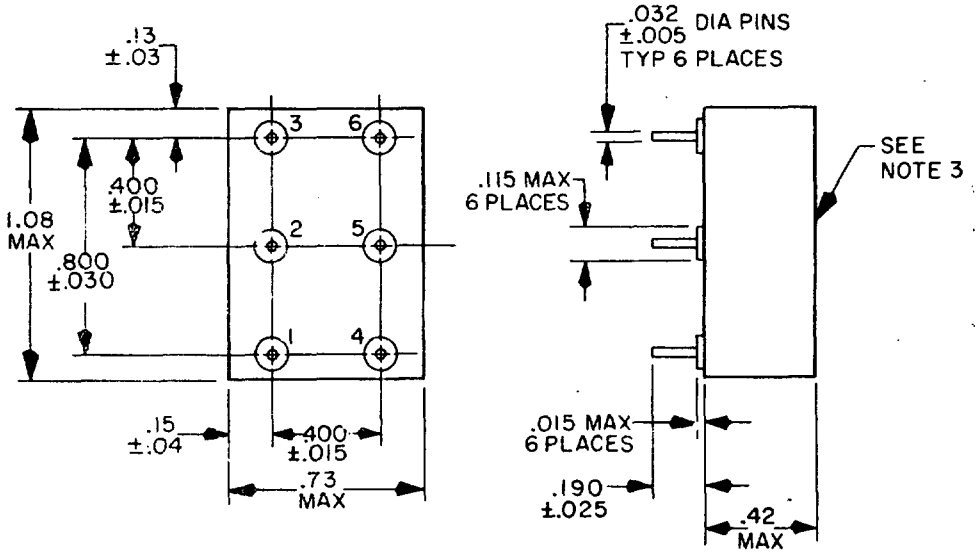

INCHES	MM	INCHES	MM
.005	.13	.13	3.3
.015	.38	.15	3.8
.025	.64	.190	4.83
.03	.76	.400	10.2
.030	.762	.42	10.7
.032	.81	.73	18.5
.04	1.0	.800	20.3
.115	2.92	1.08	27.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking to include appropriate labeling of input, output and coupled port, above those respective pins.
4. Pin numbers are shown for reference - need not appear on the part.
5. Termination for P/N M15370/18-005, -006, and -007:

   Input - pin 1
   Coupled output - pin 4
   Output - pin 3
   Ground - pin 2 and 5
   Pin 6 not used in circuit.

FIGURE 3. Dimensions and configuration for part numbers M15370/18-005, -006, and -007.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash no.	Frequency range	Coupling (mid-frequency)	Coupling variation (max)	Effective directivity		Insertion loss		VSWR(max)		Input power		
				Over frequency band	Min	Over frequency band	Max	Primary line	Secondary line	Over frequency band	Avg.	Peak
	MHz	dB	dB	MHz	dB	MHz	dB			MHz	W	W
-001	0.2-250	19.5	1.0	0.2-2.0	30	0.2-0.4	0.6	1.3	1.5	0.2-2.0	1.5	---
				2.0-125	25	0.4-125	0.5			0.2-250	4.0	---
				125-250	20	125-250	0.6					
002	0.5-500	11.5	0.6	0.5-5.0	25	0.5-1.0	1.0	1.3	1.7	0.5-5.0	1.5	---
				5.0-250	25	0.5-500	1.3			0.5-500	3.0	---
				250-500	15							
003	1-1000	11.0	0.5	1.0-10.0	30	1.0-10.0	1.7	1.5	1.5	1.0-10.0	1.0	---
				10.0-500	20	10.0-500	1.7			1.0-1000	2.0	---
				500-1000	20	500-1000	2.0					
004	10-400	10.0	.25	10-400	35	10-400	0.65	1.1	1.1	10-400	10.0	---
005	50-400	10.0	1.0	50-400	25	50-400	0.6	1.3	1.3	50-400	---	5
006	50-400	15.0	1.0	50-400	25	50-400	0.6	1.3	1.3	50-400	---	5
007	50-400	20.0	1.0	50-400	25	50-400	0.6	1.3	1.3	50-400	---	5
008	250-1000	10.0	1.0	250-400	30	250-600	1.4	1.8	1.8	250-1000	5.0	---
				400-800	20	600-1000	1.9					
				800-1000	15							

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

TABLE II. Physical and environmental characteristics. 1/ 2/

Dash no.	Weight	Temperature range (operating on top nonoperating on the bottom)	Thermal shock, method 107	Vibration, high-frequency, method 204	Shock (specified pulse), method 213	Seal, method 112	Solder-ability, method 208	Resistance to soldering heat, method 210	Terminal strength, method 211
001	.011 lb	-55° to +100°C -55° to +100°C	---	D	I	---	Yes	B	---
002	5.2 g	-55° to +100°C -55° to +100°C	B	D	I	A	Yes	B	A (3 lbs)
003	5.2 g	-55° to +100°C -55° to +100°C	B	D	I	A	Yes	B	A (3 lbs)
004	---	-54° to +100°C -54° to +100°C	A	D	A	A	Yes	B	C (1/2 lb)
005	.4 oz	0° to +65°C -62° to +75°C	---	---	H	---	Yes	---	---
006	.4 oz	0° to +65°C -62° to +75°C	---	---	H	---	Yes	---	---
007	.4 oz	0° to +65°C -62° to +75°C	---	---	H	---	Yes	---	---
008	.011 lb	-55° to +100°C -55° to +100°C	---	D	I	A	Yes	B	---

1/ Letters denote test conditions of MIL-STD-202.
2/ The seal, solderability, resistance to soldering heat, and terminal strength tests shall be performed in the order shown following the shock test of MIL-C-15370 during first article inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 through 3.

Electrical: See table I.

Physical and environmental characteristics: See table II and the following data:

Hermetic seal (when specified, see table II). Hermetically sealed directional couplers shall be tested in accordance with method 112 of MIL-STD-202.

Solderability (when specified, see table II). The terminals of the directional couplers shall be tested in accordance with method 208 of MIL-STD-202. The following detail shall apply:

a. Number of terminals - All.

Resistance to soldering heat (when specified, see table II). Directional couplers shall be tested in accordance with method 210 of MIL-STD-202. The following details shall apply:

a. The use of heat sinks - Not applicable.
b. Terminations not to be tested - Not applicable.
c. Special preparation - Not applicable.
d. Immersion in flux - Not applicable.
e. Depth of immersion in molten solder - .060 ±.020 inch of header.
f. Test condition letter - As specified in table II.
g. Cooling time - Stabilize to +25°C.
h. Examinations and measurements before and after the test - Insertion loss and seal test.

Terminal strength (when specified, see table II). The terminals of the directional couplers shall be tested in accordance with method 211 of MIL-STD-202.

Marking: Part numbers shall be located as shown on figures 1 through 3.

Part number: M15370/18-(and a dash number from table I).

NOTE: Directional couplers covered by this specification sheet are substituted for the following manufacturer's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Part number M15370/18-	Manufacturer's code	Manufacturer's part number	FSN 5985-
001	15542	PDC20-3	---
001	05869	723139-1	---
002	15542	PDC10-1	---
002	80249	IE30055	---
003	15542	PDC10-21	---
004	13499	277-0457-010	01-062-9115
004	32252	R-D3-10U	---
004	32252	R-D3-10-216	01-062-9115
005	13755	CRS-10-225	---
006	13755	CRS-15-225	---
007	13755	CRS-20-225	---
008	15542	PDC10-2	---
008	05869	712441-1	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, AS
Air Force - 11, 99
DLA - ES

User activities:
Navy - MC, SH, CG

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0912)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.