
MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (PIN PLUG-IN-TERMINATION)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

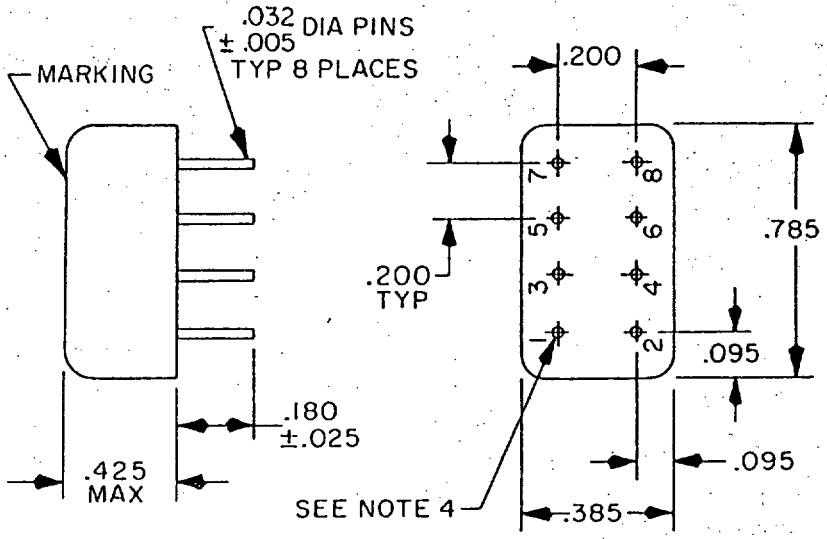


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Pin numbers are shown for reference - need not appear on the part.
4. Insulator around pin 1 shall be a contrasting color.
5. Unless otherwise specified, tolerance is ±.016 (.41 mm).
6. Termination for P/N M15370/18-001 through M15370/18-003, M15370/18-008:

   Input - pin 1
   Coupled output - pin 3
   Output - pin 4
   Ground - pins 2, 5, 7, and 8
   Pin 6 is not used in the circuit

FIGURE 1. Dimensions and configuration for part numbers M15370/18-001 through M15370/18-003, M15370/18-008, and M15370/18-009.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

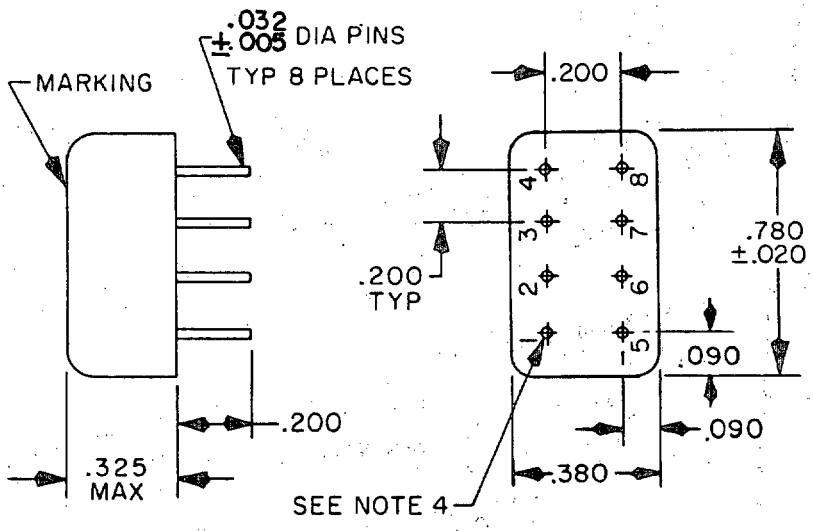


Inches	mm
.005	0.13
.020	0.51
.032	0.81
.090	2.29
.0200	5.08
.325	8.26
.380	9.65
.780	19.81

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Pin numbers are shown for reference - need not appear on the part.
4. Insulator around pin 1 shall be a contrasting color.
5. Unless otherwise specified, tolerance is ±.016 (0.41 mm).
6. Termination for P/N M15370/18-004:

   Input - pin 1
   Coupled output - pin 4
   Output - pin 5
   Ground - pins 2, 3, 6, 7, and 8

FIGURE 2. Dimensions and configuration for part number M15370/18-004.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

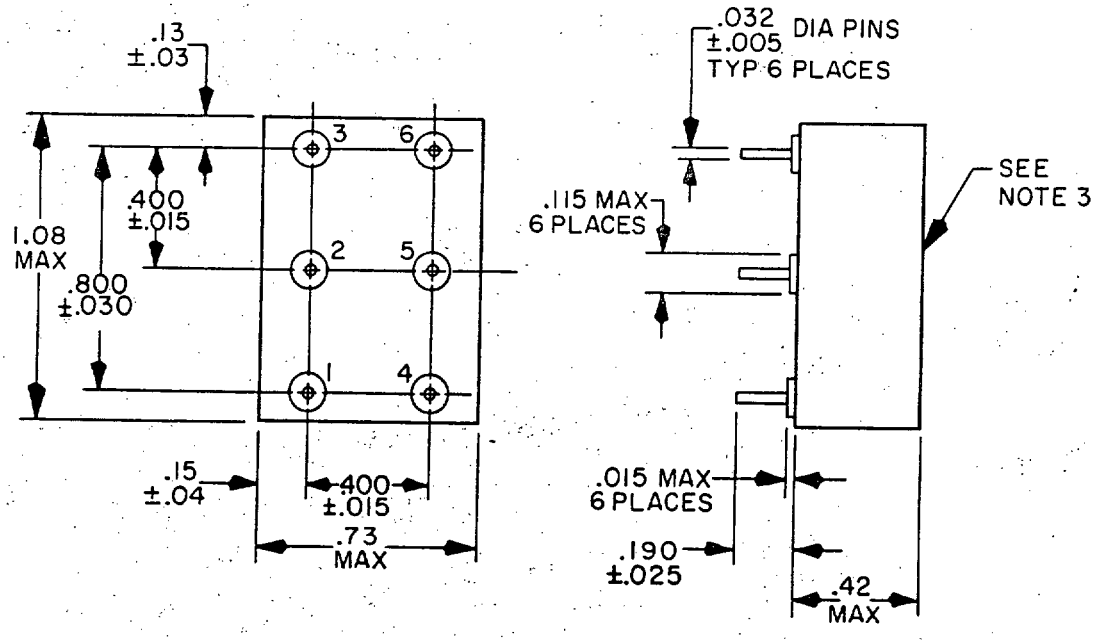


Inches	mm	Inches	mm
.005	0.13	.13	3.3
.015	0.38	.15	3.8
.025	0.64	.190	4.83
.03	0.8	.400	10.20
.030	0.76	.42	10.7
.032	0.81	.73	18.5
.04	1.0	.800	20.3
.115	2.92	1.08	27.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Marking to include appropriate labeling of input, output and coupled port, above those respective pins.
4. Pin numbers are shown for reference - need not appear on the part.
5. Termination for P/N M15370/18-005 through M15370/18-007:

   Input - pin 1
   Coupled output - pin 4
   Output - pin 3
   Ground - pins 2 and 5
   Pin 6 not used in circuit

FIGURE 3. Dimensions and configuration for part numbers M15370/18-005 through M15370/18-007.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

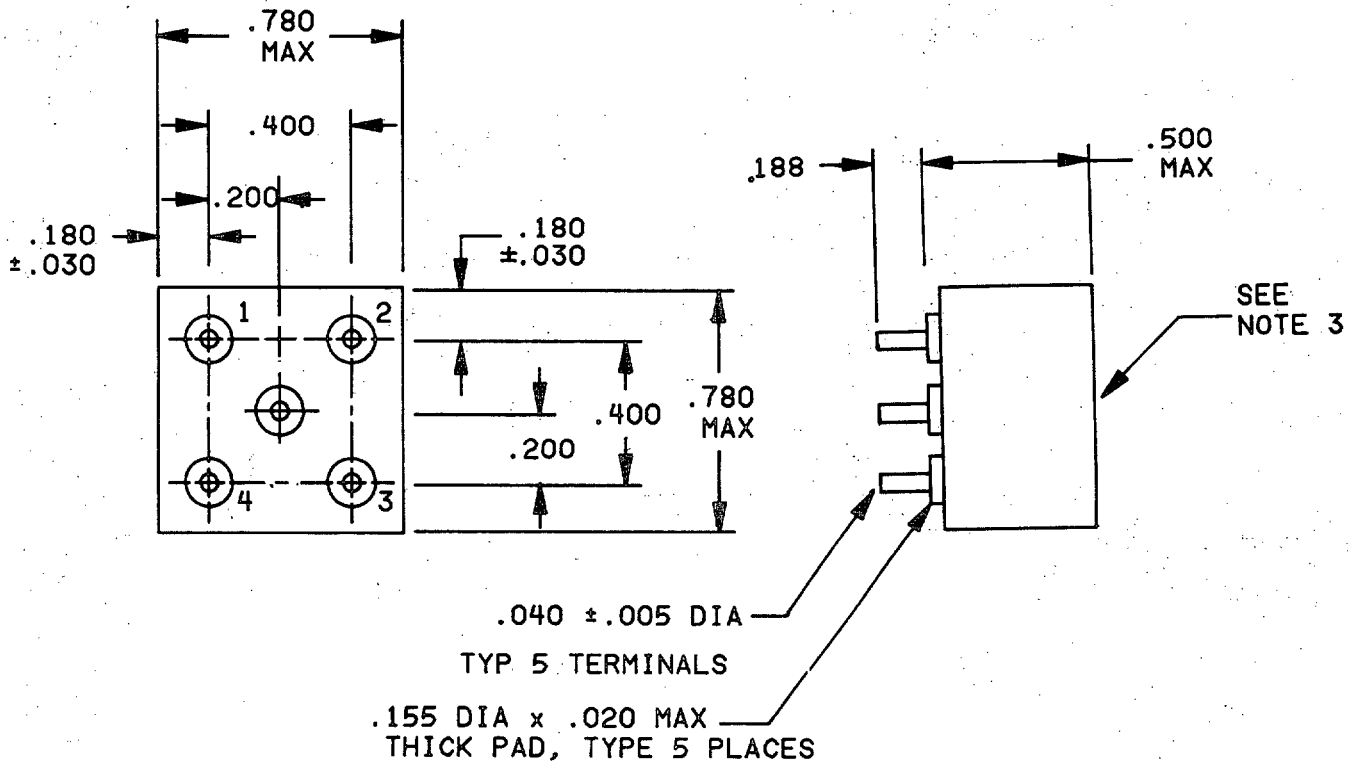


Inches	mm	Inches	mm
.005	0.13	.188	4.77
.020	0.51	.200	5.08
.040	1.02	.400	10.83
.155	3.94	.500	12.70
.180	4.57	.780	19.81

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Marking to include appropriate labeling of input, output and coupled port, above those respective pins.
4. Pin numbers are shown for reference - need not appear on the part.
5. Unless otherwise specified, tolerance is ±.020.
6. Termination for P/N M15370/18-010 and M15370/18-013:

   Input - pin 5
   Output - pin 4
   Ground - pin 3
   Coupled output - pin 2
   Internal standoff - pin 1

FIGURE 4. Dimensions and configuration for part numbers M15370/18-010 and M15370/18-013.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

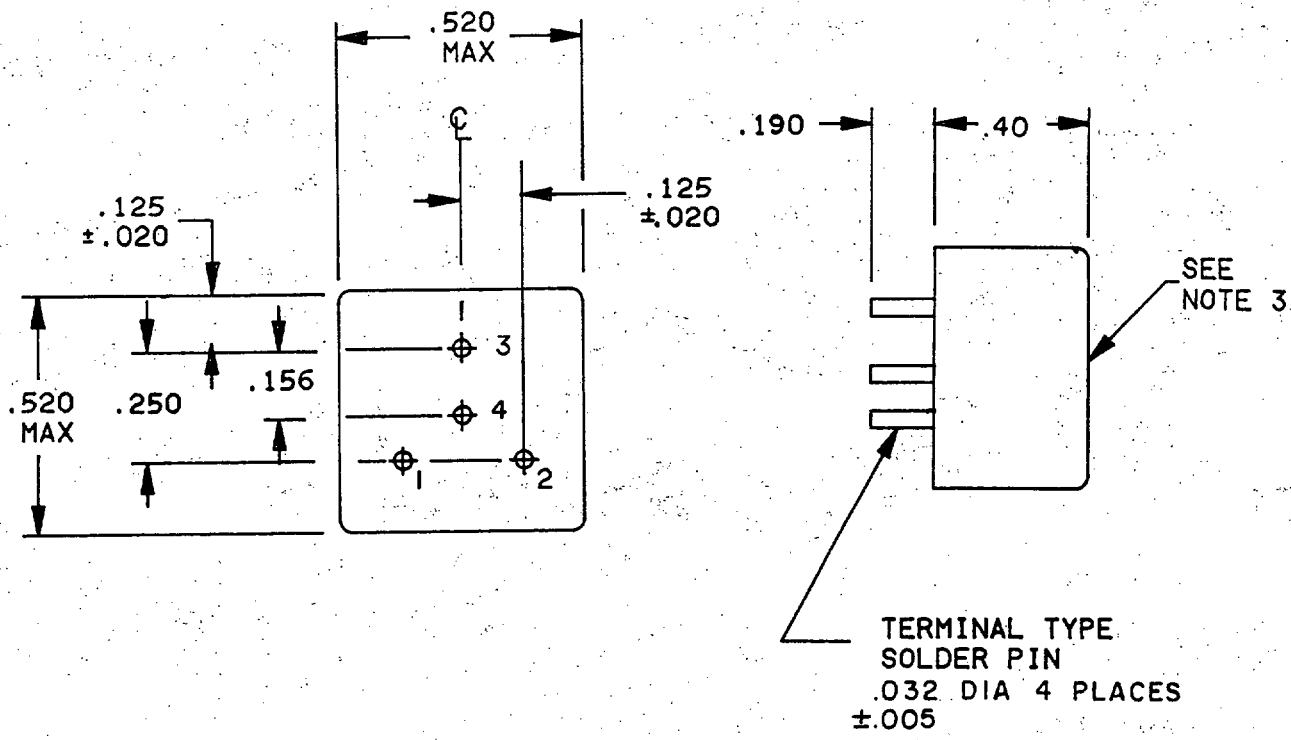

Inches	mm	Inches	mm
.005	0.13	.125	3.18
.020	0.51	.156	3.96
.032	0.81	.190	4.83
.040	1.02	.250	6.35
		.520	13.21

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Marking to include appropriate labeling of input, output and coupled port, above those respective pins.
4. Pin numbers are shown for reference - need not appear on the part.
5. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
6. Termination for P/N M15370/18-011 and M15370/18-012:

   Input - pin 1
   Output - pin 2
   Coupled output - pin 3
   Ground - pin 4

FIGURE 5. Dimensions and configuration for part numbers M15370/18-011 and M15370/18-012.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	Insertion loss (dB) max	VSWR max		RF input power to primary	
		Nominal	Tolerance				Primary line	Secondary line	Over frequency range	Avg
	MHz								MHz	Watts
001N S	0.2 - 250	19.5	±0.5	±0.5	30 @ 0.2-2.0 MHz 25 @ 2.0-125 20 @ 125-250 MHz	0.6 @ 0.2-0.4 MHz 0.5 @ 0.4-125 0.6 @ 125-250 MHz	1.30:1	1.50:1	0.2 - 2.0 0.2 - 250	1.5 4.0
002N S	0.5 - 500	11.5	±0.6	±0.6	25 @ 0.5-5.0 MHz 25 @ 5-250 15 @ 250-500 MHz	0.3 @ 0.5-1.0 MHz 0.5 @ 0.5-500 MHz	1.30:1	1.70:1	0.5 - 5.0 0.5 - 500	1.5 3.0
003N S	1 - 1000	11.0	±0.5	±0.5	30 @ 1-10 MHz 20 @ 10-500 20 @ 500-1000 MHz	0.6 @ 1- 10 MHz 0.6 @ 10-500 1.0 @ 500-1000 MHz	1.50:1	1.50:1	1.0 - 10 1.0 - 1000	1.0 2.0
004N S	10 - 400	10.0	±0.3	±0.25	35	0.65	1.10:1	1.10:1	10 - 400	10.0
005N S	50 - 400	10.0	±1.0	±1.0	25	0.6	1.30:1	1.30:1	50 - 400	5.0
006N S	50 - 400	15.0	±1.0	±1.0	25	0.6	1.30:1	1.30:1	50 - 400	5.0
007N S	50 - 400	20.0	±1.0	±1.0	25	0.6	1.30:1	1.30:1	50 - 400	5.0
008N S	250 - 1000	10.0	±1.0	±1.0	30 @ 250-400 MHz 20 @ 400-800 15 @ 800-1000 MHz	0.4 @ 250-600 MHz 0.7 @ 600-1000 MHz	1.80:1	1.80:1	250 - 1000	5.0
009N S	0.01 - 35	15.0	±0.5	±0.5	20	0.5	1.30:1	1.30:1	0.01 - 35	4.0
010N S	1 - 60	20.0	±1.0	±0.5	25 @ 2-32 MHz 20 @ 1-60 MHz	0.2 @ 2-32 MHz 0.3 @ 1-60 MHz	1.50:1	1.50:1	1 - 60	2.0
011N S	200 - 280	20.0	±1.0	±1.0	25	0.5	1.30:1	1.30:1	200 - 280	1.0
012N S	10 - 400	20.0	±1.0	±0.5	25 @ 20-200 MHz 20 @ 10-400 MHz	0.35 @ 20-200 MHz 0.55 @ 10-400 MHz	1.40:1	1.40:1	10 - 400	2.0
013N S	30 - 500	10.0	±1.0	±0.25	30 @ 30-300 MHz 25 @ 300-500 MHz	0.3 @ 30-300 MHz 0.6 @ 300-500 MHz	1.30:1	1.30:1	30 - 500	5.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

TABLE II. Physical and environmental characteristics. 1/

Dash no.	Weight	Temperature range (operating on top nonoperating on the bottom)	Thermal shock, method 107	Vibration, high-frequency, method 204	Shock (specified pulse), method 213	Seal, method 112	Solder-ability, method 208	Resistance to soldering heat, method 210	Terminal strength, method 211
001	5.0 g	-55°C to +100°C -65°C to +100°C	---	D	I	---	Yes	B	---
002	5.2 g	-55°C to +100°C -65°C to +100°C	---	D	I	A	Yes	B	A (3 lbs)
003	5.2 g	-55°C to +100°C -65°C to +100°C	---	D	I	A	Yes	B	A (3 lbs)
004	6.0 g	-54°C to +100°C -65°C to +100°C	A	D	A	A	Yes	B	---
005	11.4 g	-54°C to +100°C -65°C to +125°C	---	---	H	---	Yes	---	---
006	11.4 g	-54°C to +100°C -65°C to +125°C	---	---	H	---	Yes	---	---
007	11.4 g	-54°C to +100°C -65°C to +125°C	---	---	H	---	Yes	---	---
008	5.0 g	-55°C to +100°C -65°C to +100°C	---	D	I	A	Yes	B	---
009	5.0 g	-55°C to +100°C -65°C to +100°C	---	D	I	A	Yes	B	---
010	7.0 g	-54°C to +100°C -65°C to +125°C	---	---	H	---	Yes	---	---
011	7.0 g	-54°C to +100°C -65°C to +125°C	---	---	H	---	Yes	---	---
012	7.0 g	-54°C to +100°C -65°C to +125°C	---	---	H	---	Yes	---	---
013	7.0 g	-54°C to +100°C -65°C to +125°C	---	---	H	---	Yes	---	---

1/ Letters denote test conditions of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 through 5.

Electrical: See table I.

Physical and environmental characteristics: See table II.

Weight: See table II.

Marking: Part numbers shall be located as shown on figures 1 through 5.

Part number: M15370/18- (and a dash number from table I).

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table III. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part numbers.

TABLE III. Substitution data.

Part number M15370/18-	Manufacturer's code	Manufacturer's part number	NSN 5985
001	15542	PDC20-3	01-076-8477
001	05869	723139-1	---
002	15542	PDC10-1	01-178-4406
002	80249	IE30055	---
003	15542	PDC10-21	01-130-0177
004	13499	277-0457-010	01-062-9115
004	32252	R-D3-10U	---
004	32252	R-D3-10-216	01-062-9115
005	13755	CRS-10-225	---
006	13755	CRS-15-225	---
007	13755	CRS-20-225	---
008	15542	PDC10-2	---
008	05869	712441-1	---
009	15542	PDC-15-6	01-147-0160
010	12457	CRS-20-17	01-024-2999
011	10001	2938626-1	---
011	12457	CRS-20-225	---
012	06424	2610967-1	---
012	12457	CRS-20-110	---
013	12457	CRS-10-165	01-086-9669

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-15)

*U.S. GOVERNMENT PRINTING OFFICE: 1989--704-034/14235

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.