MILITARY SPECIFICATION

DRAWERS, EXTREME COLD WEATHER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a man's cold weather cotton knitted drawers.

1.2 Classification. The drawers shall be of one type and in the following sizes (see 6.2):

Sizes - X-Small, Small, Medium, Large and X-Large.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

ASMC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issue of these documents shall be those listed in the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
JJ-W-155	- Webbing, Textile (Cotton, Elastic)
NN-P-71	- Pallets, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label; for Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallets, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-C-17157	- Cloth, Knitted, Cotton (Waffle Type)
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Load

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issue shall be those in effect on the date of solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Application of copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington D.C. 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of documents which are DOD adopted shall be those listed in the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material. (See 6.4)

3.3.1 Cloth, knitted, cotton (waffle type). The basic material shall conform to MIL-C-17157, either flat knit or circular knit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

3.3.2 Cloth, cotton, rib-knit. The cloth for the anklets shall be knitted from unbleached cotton knit fabric and shall conform to the following requirements when tested as specified in Table IV:

Knit	Wales and courses per inch (2.5cm)(min)		Yarn size	Bursting strength (min) lbs. (newtons)
	Wales	Courses		
1 by 1 rib	20	35	18/1	95 (423)

3.3.3 Fly facing. The material for the fly facing for the drawers shall be bleached or unbleached cloth, cotton, jean conforming to the following requirements when tested as specified in table IV:

Weight (min) oz/sq yd (g/m-sq)	Shrinkage (max) (%)		Yarn (min) per inch (2.5cm)		Breaking strength (min) lbs. (Newtons)	
	warp	filling	warp	filling	warp	filling
4.8 (163)	2.0	2.0	96	64	85 (378)	48 (214)

3.3.4 Waistband. The material for the waistband shall be unbleached webbing, textile, cotton, elastic conforming to type I, class 10 of JJ-W-155.

* 3.3.5 Thread, Cotton. The thread for seaming and stitching shall be unbleached, type IA1, Ticket Nos. 50 and 70, 3 ply conforming to V-T-276.

3.3.6 Yarn, coverstitching. The yarn for coverstitching the seams shall be unbleached cotton in sizes 28/1 (lower) and 30/2 (upper) and shall conform to the following requirements when tested as specified in Table IV:

Yarn sizes	Lengths (min)		Breaking strength (min)	
	Yards/lbs.	Meter/kg	Pounds	Newtons
28/1 1/	21,000	42,185	0.50	2.23
30/2	11,000	22,097	1.65	7.34

1/ In lieu of 28/1 sewing yarn, a ticket No. 90, type IA1, 2 ply thread conforming to V-T-276 may be used as an alternate on coverstitching the seam.

3.3.7 Label. The drawers shall have a combination identification, size and instruction label conforming to type VI, class 14 of DDD-L-20. The label printing shall show fastness to laundering. The label and format shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

DRAWERS, EXTREME COLD WEATHER
FIBER CONTENT: 100% COTTON
CONTRACT NO.: DLA100-00-0-0000 (EXAMPLE)
STOCK NO.: 8415-00-00-0000 (EXAMPLE)
SIZE: MEDIUM (31-34) (EXAMPLE)
NAME OF CONTRACTOR:

LAUNDERING INSTRUCTIONS
Hand or Machine wash - hot water
Tumble dry or flat dry
DO NOT HANG TO DRY

3.4 Design. The drawers shall be ankle length with rib knit anklets, boxer style fly, two side darts and an elastic waistband (See figure 1).

3.4.1 Figure. The figure is furnished for information purposes only. To the extent of any inconsistencies between the specification and the figure, the specification shall govern.

* 3.5 Patterns. Standard patterns will be furnished by the Government to the contractor for use in cutting the working patterns (see 6.3). The Government patterns shall not be altered in any way and the working patterns shall be identical to the Government patterns.

3.5.1 List of pattern parts. The component parts for the drawers shall be cut from materials as specified below. Two pattern sets are supplied, one with a separate fly and the other with an attached fly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

Material	Pattern Nomenclature	Cut Parts
Cloth, Cotton, Knit (waffle type)	Back and front	2
	Crotch gusset	1
	Fly extension	2 1/
Cloth, cotton, jean	Fly facing	2
Cloth, cotton, rib-knit	Anklets	2

1/ For pattern set "A" that has a separate fly.

3.6 Construction.

* 3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation any one may be used. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch types 401, 604, 605, 606 or 607 are used, the underthread shall be on the inside of the drawers.

* 3.6.2 Thread breaks and end of seams. Ends of all seams and stitching when not caught in other seams or stitching shall be backtacked not less than 1/2 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks or skipped stitches on 401 stitch type may be repaired by using 301 stitch type. Thread breaks or skipped stitches (all stitch types) shall be repaired by stitching back of the break not less than 1/2 inch. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements. The drawers shall be manufactured in accordance with the operations specified in Table I. The contractor is not required to follow the exact sequence of operations as specified, provided the finished drawers are identical with those produced by following the sequence as specified in Table I.

* 3.7.1 Abbreviations in table of operations. The abbeviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF DRAWERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
1.	Cutting of drawers.					
	a. Due to the distinctive stretch properties of this type knit fabric and in order to meet the finished garment measurements specified in Table II, it is recommended that the fabric be allowed to relax for at least 12 hours before cutting.					
	b. All parts of the drawers shall be cut in strict accordance with patterns furnished which show size, shape, directional lines and notches for the proper assembly. The directional lines may vary from the wale direction by not more than 2-1/2 inches. This deviation shall be checked by measuring from the top and bottom of the directional line on pattern to the edge of fabric. The difference between the two measurements shall not exceed the tolerance specified.					
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Fly (when attached fly is used).					
	a. Stitch the jean cloth, face up, along the edge of the underside of each fly panel, 1-1/8 (±1/16) inches gauge. The outer row of stitching shall be approximately 1/16 inch from the edge. The facings shall finish 1-1/4 (±1/8) inches wide.	301 or 401	LSk-2	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF DRAWERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	b. Overlap the left front over the right front panel 1-1/2 (±1/8) inches.					
	c. Secure fly at the bottom by stitching through both fly panels a rectangular box 1-3/4 (±1/8) inches long and 1 (±1/8) inches wide.	301 or 401	LSa-1 and SSv-1	12-14	50 50	50 70
	d. Secure the top portion of the fly by stitching through both fly panels forming a retangular box, 1 (±1/8) inch wide. The top of the box shall be caught at the top edge of the fly at the waist and the bottom of the box shall be stitched 7-1/2 (± 1/4) inches from the bottom of the fly. When completed, the fly opening shall measure 5-1/2 (±1/4) inches.	301 or 401	LSa-1 and SSv-1	12-14	50 50	50 70
4.	Fly, (when separate fly is used - pattern set "A").					
	a. Stitch the jean cloth, face up, to the body material fly extensions, 1-3/8 (±1/16) inches gauge. The outer row of stitching shall be approximately 1/16 inch from the edge. The facings shall finish 1-1/2 (±1/8) inches wide.	301 or 401	LSk-2	12-14	50 50	50 70
	b. Stitch the raw edges of the fly extensions to the front panels as indicated on the patterns.	606 or 607	FSa-1	12-14	70	30 28
	c. Secure fly at the bottom by stitching through both fly panels forming a rectangular box 1-3/4 (±1/8) inches long and 1 (±1/8)inch wide.	301 or 401	LSa-1 and SSv-1	12-14	50 50	50 70
	d. Secure the top portion of the fly by stitching through both fly panels forming a rectangular box 1 (±1/8) inch wide. The top of the box shall be caught at the top edge of the fly at the waist and the bottom of the box shall be stitched 7-1/2 (±1/4) inches from the bottom of the fly. When completed, the fly opening shall measure 5-1/2 (±1/4) inches.	301 or 401	LSa-1 and SSv-1	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF DRAWERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
5.	Darts.					
	a. Stitch the side darts. The finished darts shall measure 5 (±1/2) inches from the top edge of the drawers.	606 or 607	FSa-1	12-14	70	30 28
6.	Anklets.					
	a. Lap the double ply rib-knit cloth over the bottom edge of each leg 1/4 to 3/8 inch and stitch with the wales of the cloth perpendicular to the anklet seam.	604 or 605	LSa-1	12-14	50	50 50
7.	Assembly.					
	a. Stitch the semi-circular portion of the gusset to the crotch area from one leg area around front to the other leg area.	606 or 607	FSa-1	12-14	70	30 28
	b. Stitch the remaining seam of the drawers, closing the legs and seat.	606 or 607	FSa-1	12-14	70	30 28
	c. Turn the stitching chain at the bottom of the anklet to the inside and secure with a 1/2 or 5/8 inch bartack either centered across or parallel to the anklet seam 1/8 to 1/4 inch from the bottom edge of the anklet.	Brtck		28 (1/2 in) or 42 (5/8 in) per brtck		
8.	Waistband.					
	a. Cut the elastic webbing into the following lengths: XS - 22-1/4, S - 26-1/4, M - 30-1/4, L - 34-1/4, and XL - 38-1/4. All measurements are in inches with a tolerance of (±1/4) inch.					
	b. Stitch the sewing edge of the webbing around the entire circumference of the waist, starting and ending at the seat seam. The webbing shall overlap the top edge of the drawers 1/4 to 3/8 inch and one end shall overlap the other end 1/4 (±1/8) inch.	604 or 605	LSa-1	12-14	50	50 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF DRAWERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	c. Close the waistband by stitching across the full width of the waistband webbing so that the closing seam is aligned with the seat seam.	606 or 607	FSa-1	12-14	70	30 28
	Note: Operation 8 may be performed before operation 7. In this case, operation 8c may be omitted, however, the seat seam shall extend to the top of the waistband, closing the ends of the waistband material.					
9.	Label. a. Center a label over the inside back closing seam with the top edge of the label aligned with the top edge of the waistband. Stitch all four sides 1/16 to 1/8 inch from the edge.	301	LSbj-1	12-14	50	50
10.	Clean drawers. a. All thread ends shall be trimmed and loose threads removed from drawers. Remove all spots and stains.					
	Note: Caution shall be made so not to cut the material when trimming.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements shall conform to the requirements in Table II. All measurements and tolerances are expressed in inches and shall be taken with drawers laid out flat and smooth, face up and under no tension.

Table II - Sizes and measurements

Size	Overall length(A)	Waistband (B)	Front rise length (C)	Fly opening(D)	Anklet length(E)	Anklet width (F)
X-Small(23-26)	40-1/2	11	15-1/2	5-1/2	3-1/2	4-3/8
Small(27-30)	41	13	16	5-1/2	3-1/2	4-3/8
Medium(31-34)	41-1/2	15	16-1/2	5-1/2	3-1/2	4-3/8
Large(35-38)	42	17	17	5-1/2	3-1/2	4-3/8
X-Large(39-42)	42-1/2	19	17-1/2	5-1/2	3-1/2	4-3/8
Tolerance	± 1/2	± 1	± 1/2	± 1/4	± 1/4	± 1/4

NOTE: Refer to Figure 1 for A, B, C, D, E and F measurements.

A. Overall length - Measure from top edge of waistband to bottom of anklet.

B. Waistband - Measure from folded edge to folded edge across top edge of waistband.

C. Front rise length - Measure along the fly from top edge of waistband to folded edge of crotch with waistband at front and back superimposed.

D. Fly opening - Measure along the folded edge of fly the distance between stitching at each end of opening.

E. Anklet length - Measure from the top edge of seam to bottom folded edge.

F. Anklet width - Measure from folded edge to folded edge at midpoint.

3.9 Workmanship. The finished drawers shall conform to the quality established by this specification. The occurrence of defect shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

4.4.1.1 Testing of components. In addition, components and materials listed in Table IV shall be tested for the characteristics specified and in accordance with the referenced test methods in FED-STD-191. All test reports shall contain the individual values utilized in expressing the final results. The sample size shall be in accordance with Table III and the lot shall be unacceptable if one or more units fail to meet any requirement specified. The sample unit and basis for lot size shall be expressed as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

Material	Basis for lot size	Sampling unit for testing
Cloth, cotton, rib-knit	Pound	1 yard full width
Cloth, cotton, jean	Yard	2 yards full width
Yarn, cotton	Spool, cone or tube	1 holder

Table III - Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table IV - Component testing

Material	Characteristic	Requirement paragraph	Test method
Cloth, Cotton, rib-knit (anklet)	Cotton identification	3.3.2	1200 1/
	Yarn size	3.3.2	4010 1/
	Knit type	3.3.2	Visual 2/
	Wales and courses/inch	3.3.2	5070
	Bursting strength	3.3.2	5120
Cloth, cotton jean (fly facing)	Weight per sq. yd.	3.3.3	5041
	Shrinkage	3.3.3	5556 3/
	Yarns per inch	3.3.3	5050
	Breaking strength	3.3.3	5100
Yarn, cotton	Cotton identification	3.3.6	1200 1/
	Yarn size	3.3.6	4020
	Yards per lbs.	3.3.6	4010
	Breaking strength	3.3.6	4100

1/ Unless otherwise specified, a contractor's certificate of compliance shall be acceptable for these characteristics.
2/ One determination shall be made from each sample unit and the results reported as "pass" or "fail".
3/ Cotton laundering procedure shall be followed.

4.4.2 Examination of the end item. The defects found during the examination of the end item shall be classified in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL'S) shall be as indicated in 4.4.2.3. The sample unit shall be one pair of drawers. The lot size shall be expressed in units of drawers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

4.4.2.1 Visual examination. The drawers shall be visually examined for the following defects:

Defect	Classification Major	Minor
I MATERIAL DEFECTS AND DAMAGES		
a. Any hole, cut, tear, drop stitch, needle chew or mend or thin area.	X	
b. Slubby yarn, more than twice the size of the normal yarn		X
c. Any loose knitting, causing sleaziness		X
d. Pulled or snagged stitches		X
II CLEANLINESS		
a. Any spot or stain		X
b. Foreign matter		X
c. Objectionable odor	X	
d. Five or more ends not trimmed to less than 1/2 inch inside.		X
e. Three or more ends not trimmed to less than 1/4 inch on the outside.		X
III COMPONENTS AND ASSEMBLY		
a. Any component part or operation omitted, not as as specified, or improperly performed.	X	
b. Any clearly visible distortions or area of tension	X	
IV CUTTING		
a. Any component part not cut in accordance with specified pattern, directional lines on pattern or not in accordance with specification requirements.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
V SEAMS AND STITCHING		
a. Accuracy of seaming.		
1. Any seam twisted, puckered or pulled		X
2. Loose or tight tension resulting in an unsatisfactory seam.	X	
3. Part of garment caught in any unrelated operation or stitching.	X	
4. End of seam or stitching, when not caught in other seam or stitching, tacked or backtack less than 1/2 inch.		X
5. Stitching overlapping ends of thread breaks less than 1/2 inch.		X
b. Open seams		
All open seams.	X	
Note: A broken stitch or two or more continuous skipped stitches constitutes an open seam.		
c. Raw edge		
Any protrusion of more than 1/4 inch from stitching line or protruding more than 1/8 inch along one inch or more of seam.		X
d. Runoff - More than 1/4 inch		X
e. Not specified seam or stitch type.	X	
f. Number of stitches per inch is more or less than specified.		X
g. Bartacks-		
1. Missing, insecure or misplaced		X
2. Length less than 1/2 inch or more than 5/8 inch.		X
VI LABEL		
a. Missing, misplaced, incorrect or illegible		X
b. Stitched improperly		X

* 4.4.2.2 Dimensional examination. The drawers shall be examined for conformance to the measurements specified in Tables II. Measurements will be made as described in footnotes below the tables. Any measurements not within the specified tolerances shall be scored as a defect.

4.4.2.3 Acceptable quality and inspection levels. The acceptable quality levels (AQL'S) expressed in defects per hundred units and the inspection levels shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

Visual examination (4.4.2.1)	AQL'S	Inspection levels
Major defects	2.5	II
Total defects (Major and Minor combined)	6.5	II
Dimensinal examination (4.4.2.2)		
One class of defects	4.0	S-3

4.5 Examination of packaging requirements. An examination shall be made to determine that packaging, packing and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defects
Marking (interior and exterior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Material	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling. Distorted or bulging containers.
Content	Number of items per shipping container is more or less than specifed. 1/ Size shown on one or more drawers not as specified on container. 1/

1/ For these defects, two shipping containers shall be examined from each lot.

* 4.6 Palletization examination. An examination shall be made to determine that the palletization complies with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 as specified in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of drawers shall be folded in half lengthwise and then folded into thirds along the length. Each garment shall measure approximately 11-1/2 inches in width by 14-1/2 inches in length. Five folded pair of drawers of one size only, with every other one reversed, shall be neatly stacked and securely tied across the center width with twine or tape to form a bundle.

5.1.2 Level C. The drawers shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A. Thirty (30) pairs of drawers, of one size only, packaged as specified in 5.1 shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, grade V15c, variety DW, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat in two stacks, three bundles per stack within the shipping container. Each container shall have the contents completly covered on the top and bottom with a sheet of commerical grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2 Level B. Thirty (30) pairs of drawers, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, grade 275, variety DW, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat in two stacks, three bundles per stack within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commerical grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. The drawers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classificaton Rules as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Label, mixed sizes. Each shipping container, packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a 4 by 5 inch white paper label with the words "MIXED NSN" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and National Stock Numbers contained therein.

5.4 Palletization. When specified (see 6.2), item, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be banded with primary and secondary straps in accordance with the banding means C, K and L, or O or P. Pallet patterns shall be in accordance with the apendix of MIL-STD-147.
The pallet shall be 4-way, Type IV; V, Class 1, Size 2; or VIII, fabricated from wood groups I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 frabricated from wood groups specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

6.1 Intended use. The drawers covered by this specification are intended for wear by male personnel as part of the cold weather outfit.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required.
(c) When first article inspection is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer shall include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval of the first article.
(d) Selection for applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When palletization is required (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring office issuing the invitation for bids.

6.4 Recycled material. It is encourged that recycled material be used when practical as long as it meets the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

* 6.5 Subject term (key word) listing.
Clothing, cold weather
Drawers, waffle knit
Drawers, 100% cotton
Drawers, termo
Underwear, termo
Underdrawers, unisex

* 6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU
Air Force - 99
Army - GL

Preparing Activity:
Navy - NU

Project No. 8415-0248

Review Activity:
Air Force - 11
DLA - CT

User Activity:
Navy - YD, CG
Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

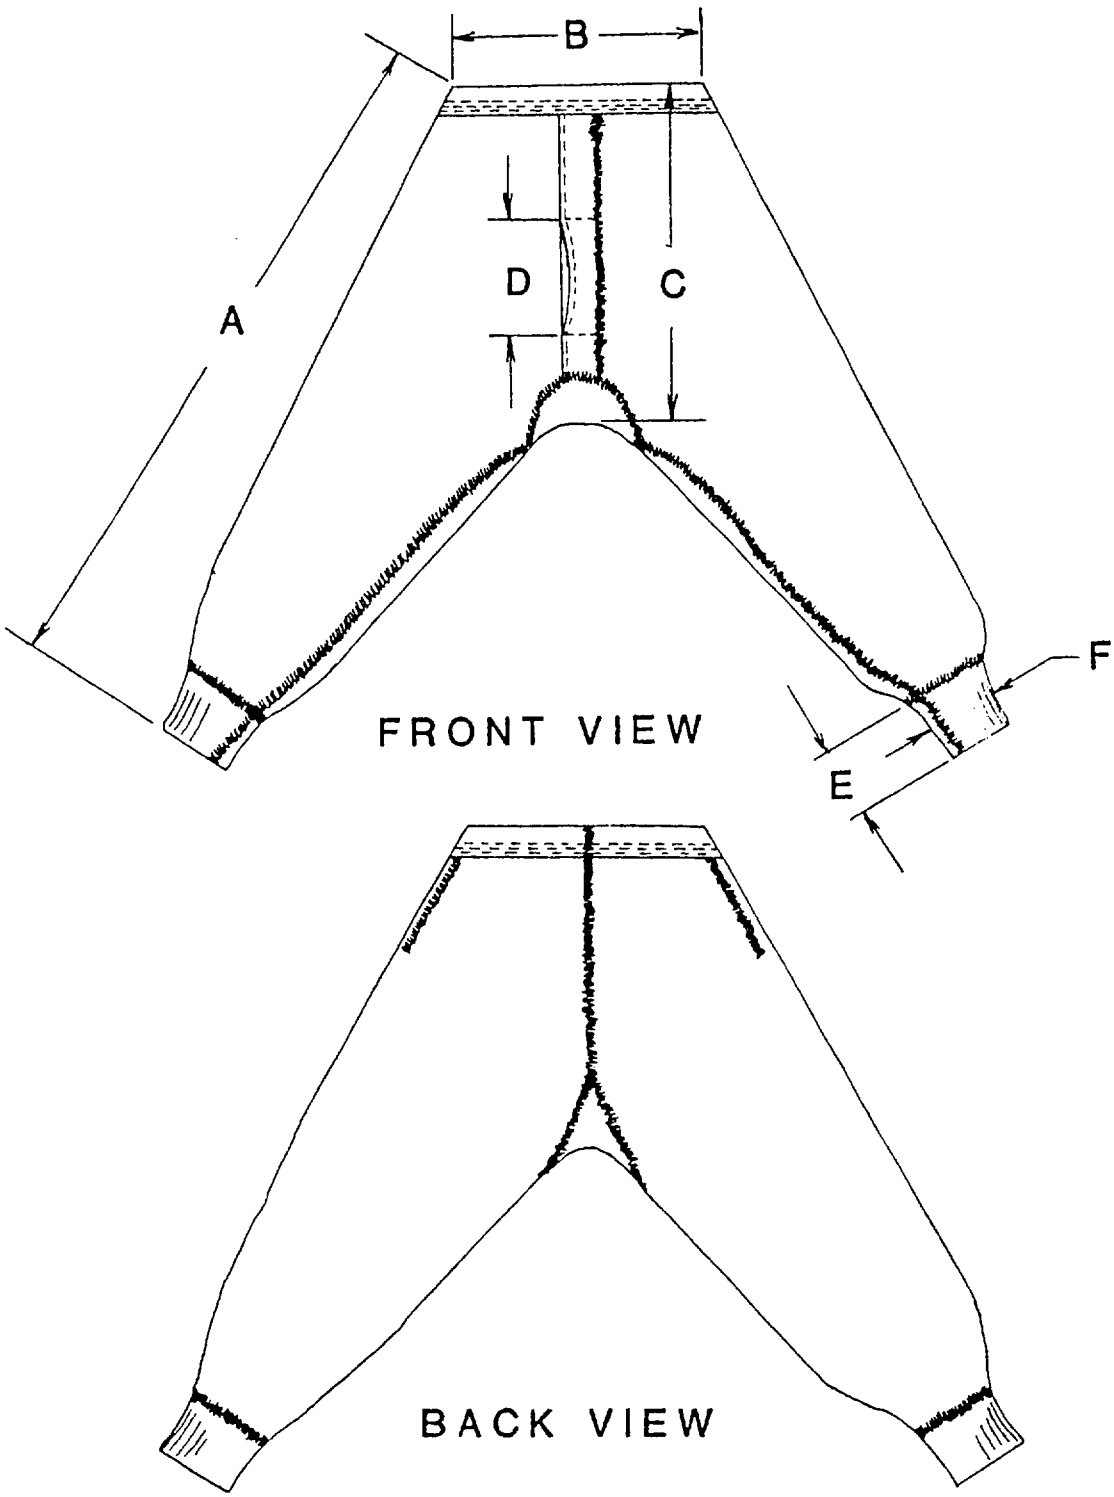


FIGURE 1 - DRAWERS, EXTREME COLD WEATHER

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
21 Strathmore Road
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-D-15390L	DRAWERS, EXTREME COLD WEATHER

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:14Z
Check the source to verify that this is the current version before use.