NOT MEASUREMENT SENSITIVE


MIL-B-3628/85
12 September 1991

MILITARY SPECIFICATION SHEET

Badge, Qualification, Excellence in Competition,
Rifleman, Air Force

This specification is approved for use by all Departments and Agencies
of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

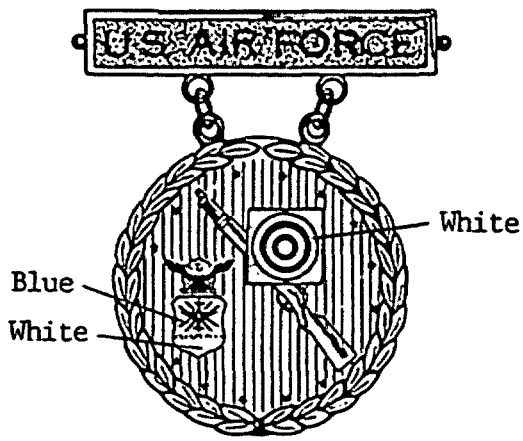

MATERIAL:
- PENDANT:
  - -1: Gilding metal or red brass
  - -2: Gilding metal
- SUSPENSION BAR:
  - -1: Gilding metal or red brass
  - -2: Gilding metal
- DEVICE:
  - -1 and -2: Gilding metal

DASH NO:
- -1: Bronze, 1st Award
- -2: Silver, 2nd Award

DIMENSIONS:
- PENDANT:
  - DIAMETER: 1-19/32 inches (4.05 cm) (REF)
  - THICKNESS (Edge): .095 inch ± .005 inch (0.241 cm ± 0.012 cm)
- SUSPENSION BAR:
  - HEIGHT (Overall): 11/32 inch (0.87 cm) (REF)
  - WIDTH (Overall): 1-9/32 inches (3.25 cm) (REF)
  - THICKNESS (Edge): .075 inch ± .005 inch (0.190 cm ± 0.012 cm)
- DEVICE
  - TARGET:
    - HEIGHT: .3/8 inch (0.95 cm) (REF)
    - WIDTH: 3/8 inch (0.95 cm) (REF)
    - THICKNESS: .050 inch ± .005 inch (0.127 cm ± 0.012 cm)
  - COAT-OF-ARMS:
    - HEIGHT: 5/8 inch (1.59 cm) (REF)
    - WIDTH: 3/8 inch (0.95 cm) (REF)
    - THICKNESS: .050 inch ± .005 inch (0.127 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:26Z
Check the source to verify that this is the current version before use.

FINISH:
PENDANT:
-1: Nickel plated, mirror-like polished
-2: Oxidized, relieved, lacquered front, back and edges
SUSPENSION BAR:
-1: Nickel plated, mirror-like polished
-2: Oxidized, relieved
DEVICE (Target and Coat-of-Arms):
-1: Hard enameled, nickel plated, mirror-like polished
-2: Hard enameled, oxidized, relieved

NOTES:
1. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
White	28

2. The attaching device shall be prong and clutch type. The prongs shall be located on the horizontal centerline of the suspension bar, equidistant from each end and 1-1/4 inch ± 1/32 inch (3.18 cm ± 0.08 cm) apart.
3. Lugs for the suspension bar and pendant shall be equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) on center. The lugs shall be fabricated from nickel plated wire for Dash No. 1 and bronze wire for Dash No. 2 .045 inch ± .005 inch (0.114 cm ± 0.012 cm) in diameter.
4. Links shall be fabricated from nickel plated wire for Dash No. 1 and copper wire for Dash No. 2 with a nominal diameter of .050 inch (0.127 cm). The overall dimension of the links shall be 1/4 inch (0.64 cm) in length and 7/32 inch (0.56 cm) in width.
5. The target and coat of arms shall be superimposed and secured to the pendant in the location shown using soft solder.
6. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Air Force - 82,99
DLA - CT

(Project No. 8455-N621)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:26Z
Check the source to verify that this is the current version before use.