NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/85F
20 February 2026
SUPERSEDING
MIL-DTL-3628/85E
22 March 2024

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, EXCELLENCE IN COMPETITION, RIFLEMAN, U. S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

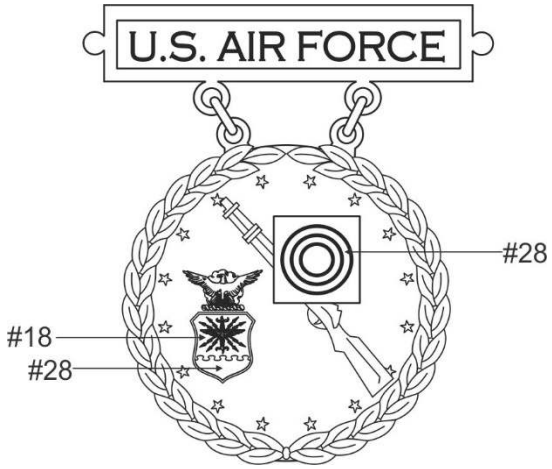

DASH NO.
-1: Bronze, 1st Award
-2: Silver, 2nd Award

MATERIAL:
PENDANT:
-1: Gilding Metal 95/5 (UNS Alloy No. C-210)
-2: Gilding Metal 95/5 (UNS Alloy No. C-210) or Red Brass 85/15 (UNS Alloy No.C-230)
SUSPENSION BAR:
-1: Gilding Metal 95/5 (UNS Alloy No. C-210)
-2: Gilding Metal 95/5 (UNS Alloy No.C210) or Red Brass 85/15 (UNS Alloy No. C-230)
DEVICE: (-1 and -2) Gilding Metal 95/5 (UNS Alloy No. C-210)

FINISH:
PENDANT:
-1: Oxidized, Buffed Relieved, Lacquered, Front, Back and Edges.
-2: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:25Z
Check the source to verify that this is the current version before use.

SUSPENSION BAR:
-1: Oxidized, Buffed Relieved.
-2: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
DEVICE:
-1: Epoxy resin (Stoning epoxy), Oxidized, Buffed Relieved.
-2: Epoxy resin (Stoning epoxy), Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:
PENDANT:
DIAMETER: 1-19/32 inches (REF)
THICKNESS: (Edge): 0.095 inch ± 0.005 inch
SUSPENSION BAR:
HEIGHT (Overall): 11/32 inch (REF)
WIDTH (Overall): 1-9/32 inches (REF)
THICKNESS (Edge): 0.075 inch ± 0.005 inch
DEVICE:
TARGET:
HEIGHT: 3/8 inch (REF)
WIDTH: 3/8 inch (REF)
THICKNESS: 0.050 inch ± 0.005 inch
COAT OF ARMS:
HEIGHT: 5/8 inch (REF)
WIDTH: 3/8 inch (REF)
THICKNESS: 0.050 inch ± 0.005 inch

EPOXY: Epoxy resin shall be applied to the Badge as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Blue	#18
White	#28

ATTACHING DEVICE AND LUGS:
1. The attaching device shall be prong and wing clutch type.

2. The prongs shall be located on the horizontal center line of the suspension bar equidistant from each end and 1-1/4 inches ± 1/32 inch apart.

3. Lugs for the suspension bar and pendant shall be equidistant from each end and 7/8 inch ± 1/64 inch on center. The lugs shall be fabricated from bronze wire for -1 and nickel-plated wire for -2 with a diameter of 0.050 inch ± 0.005 inch.
4. Lugs shall be hard soldered to the pendant or bar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:25Z
Check the source to verify that this is the current version before use.

5. Links shall be fabricated from copper wire for -1 and nickel-plated wire for -2 with a nominal diameter of 0.050 inch. The overall dimension of the links shall be 1/4 inch ± 1/64 inch in length and 7/32 inch ± 1/64 inch in width.

6. The target and coat of arms shall be superimposed and secured to the pendant in the location shown using soft solder.

NOTE:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-112)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:25Z
Check the source to verify that this is the current version before use.