NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/87B
15 November 1996
SUPERSEDING
MIL-B-3628/87A
30 July 1993

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, BRONZE EXCELLENCE IN COMPETITION, RIFLEMAN, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

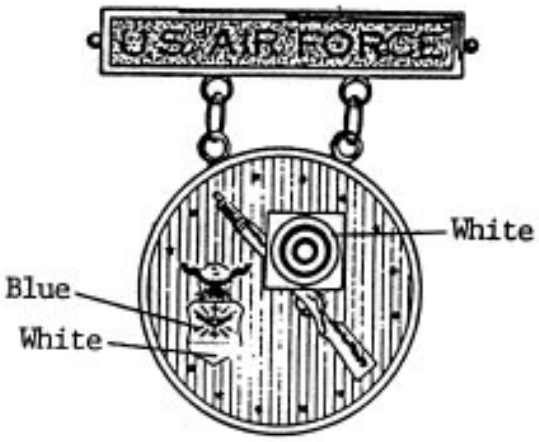

MATERIAL:
PENDANT: Gilding Metal
SUSPENSION BAR: Gilding Metal
DEVICE: Gilding Metal

FINISH:
PENDANT: Oxidized, Relieved, Lacquered Front, Back and Edges.
SUSPENSION BAR: Oxidized, Relieved, Lacquered Front, Back and Edges.
DEVICE (Target and Coat of Arms): Hard Enameled, Oxidized, Relieved.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:27Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
- PENDANT:
  - DIAMETER: 1-3/8 inches (3.65 cm) (REF)
  - THICKNESS (Edge): 0.095 inch ± 0.005 inch (0.241 cm ± 0.012 cm)
- SUSPENSION BAR:
  - HEIGHT (Overall): 11/32 inch (0.87 cm) (REF)
  - WIDTH (overall): 1-9/32 inches (3.25 cm) (REF)
  - THICKNESS (Edge): 0.075 inch ± 0.005 inch (0.190 cm ± 0.012 cm)
- DEVICE:
  - TARGET:
    - HEIGHT: 3/8 inch (0.95 cm) (REF)
    - WIDTH: 3/8 inch (0.95 cm) (REF)
    - THICKNESS: 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)
  - COAT OF ARMS:
    - HEIGHT: 5/18 inch (1.59 cm) (REF)
    - WIDTH: 3/8 inch (0.95 cm) (REF)
    - THICKNESS: 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes.

4. The attaching device shall be prong and clutch type. The prongs shall be located on the horizontal center line of the suspension bar, equidistant from each end and 1-1/4 inches ± 1/32 inch (3.81 cm ± 0.08 cm) apart.

5. Lugs for the suspension bar and pendant shall be equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) on center. The lugs shall be fabricated from bronze wire with a diameter of 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm). Lugs shall be hard soldered to the pendant or bar.

6. Links shall be fabricated from bronze wire with a nominal diameter of 0.050 inch (0.127 cm). The overall dimension of the links shall be 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) in length and 7/32 inch ± 1/64 inch (0.56 cm ± 0.04 cm) in width.

7. The target and coat of arms shall be superimposed and secured to the pendant in the location shown using soft solder.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:27Z
Check the source to verify that this is the current version before use.

DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:27Z
Check the source to verify that this is the current version before use.