MILITARY SPECIFICATION

ARCH BOARD FILE AND BOX, PRESCRIPTION FILING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of arch board file and box suitable for filing and storing 1,000 prescriptions.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Boxes, Shipping, Fiberboard.

Military

MIL-L-10547	Liners, Case and Sheet Overwrap; Water-Vaporproof, or Waterproof, Flexible.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Defense Personnel Support Center by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 7520

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications, standards and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. Material shall be of the highest quality throughout, and shall be as specified herein. The gauges of metal specified herein shall represent minimum thickness, and commercial tolerances shall apply.

3.2 Design and construction. Arch board file and box shall consist of the following components:


a. Box
b. Arch board file
c. Nine dividers
d. Two pressure-sensitive labels
e. One press board sheet

The arch board file, dividers, press board sheet, and one pressure-sensitive label shall be assembled within the box. The press board sheet and dividers shall have two holes punched and shall be inserted on the arch board file. One pressure-sensitive label shall be placed permanently on the outside of the door of the box.

3.2.1 Box. Box shall be in accordance with dimensions and general design shown in Figure 1. Details in design may be altered, provided alterations do not conflict with other portions of this specification. Box shall consist of a body, door (lid) and hinge. The box design shall permit stacking of the boxes.

3.2.1.1 Body. Body shall be constructed of one or two sheets of 0.024 inch (No. 24 Manufacturers' Standard Gauge) steel sheet (see 3.1). If two sheets are used, junctures shall be made at corners. Junctures shall be welded and shall overlap at least 1/2 inch. No part of the box shall have three thicknesses of steel sheet, except the area where a steel strip for the door stop is placed. In corners where overlap must be cut to prevent two thicknesses, overlap shall be mitered. The door stop shall be supplied in accordance with either of the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

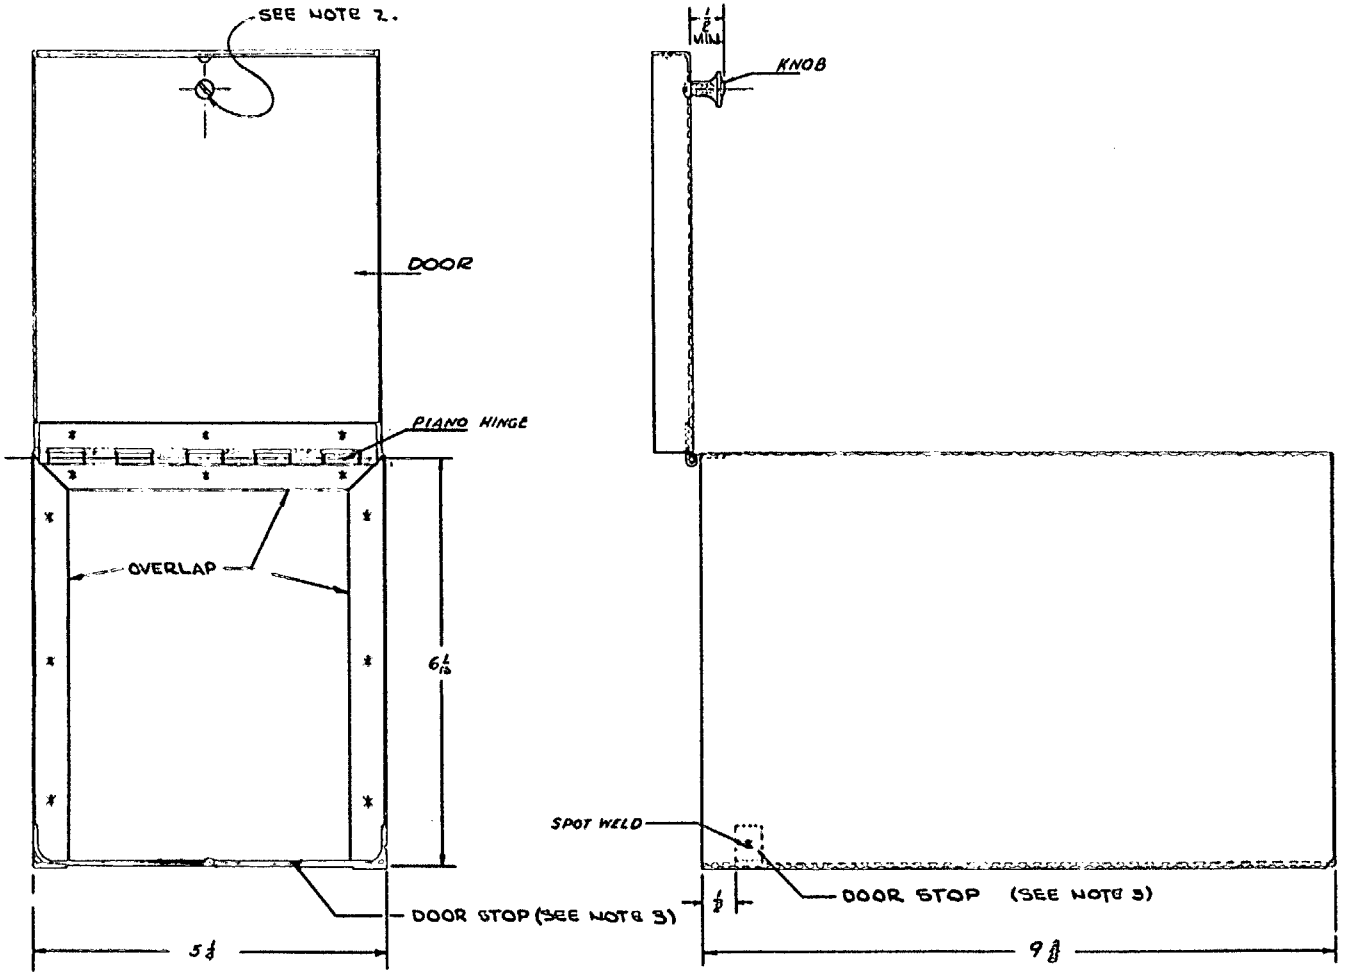

GEN. NOTES:

1. UNLESS OTHERWISE SPECIFIED TOLERANCES ARE AS FOLLOWS:
   DIMS. GREATER THAN 1 INCH ± 1/16
   DIMS. LESS THAN 1 INCH ± 1/64
2. A REMOVABLE OR PERMANENTLY ATTACHED KNOB ACCEPTABLE.
3. AS AN ALTERNATE TO A METAL STRIP, THE DOOR STOP MAY BE FORMED BY DIMPLE TYPE PROTRUSIONS LOCATED ON INSIDE BOTTOM OF BOX.

FIGURE I. Box

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

a. Door stop formed by a metal strip that stretches across the floor of the body and is spotwelded to the sides as indicated in Figure 1.

b. Door stop formed by two 1/8-inch dimple type protrusions formed within the inside bottom of the body. The front of each protrusion shall have a cutout recessed 1/2 inch from the front edge of the body, which allows two points of contact with bottom flange of the door.

Flanges from overlap, hinge and door stop shall be on the inside of the body except on the bottom where the flange from juncture overlap may be on the outside. There shall be a protrusion near the front edge of the box which mates with an indentation on the door.

3.2.1.2 Door. Door shall be fabricated of 0.024 inch (No. 24 Manufacturers' Standard Gauge) steel sheet (see 3.1), and shall be as shown in Figure 1. A knob (pull handle) shall be secured near the bottom of the door. The knob shall be fabricated of metal that is either inherently resistant to corrosion or is suitably plated or finished to resist corrosion. The knob may be either detachable (see Figure 1) or permanently attached to the door. The knob shall be so placed that the door can be easily opened and the pressure-sensitive label (see 3.2.5) can be placed on the front of the door without tearing the label. The under surface of the door shall have an indentation which mates with the protrusion on the body.

3.2.1.3 Hinge. Hinge shall be of the piano type with two flanges and a pin. Flanges shall be fabricated of 0.036 inch (No. 20 Manufacturers' Standard Gauge) steel sheet (see 3.1), and shall have the following minimum dimensions: 5 inches long and 5/8 inch wide. Pin shall be steel with a diameter of 0.095 inch nominal, and at least 5 inches long. One flange shall be electrically welded to the inside of the body, and one flange shall be electrically welded to the inside of the door. Hinge shall be so placed that, when the box is closed, the hinge pin is slightly below the plane of the top of the body. Hinge shall be so constructed that when combined with the position of the stop, the hinge causes the face of the closed door to hang parallel to the vertical edge of the body. Door shall not be considered closed unless it is touching the stop. Design of hinge shall be such that the angle between the completely opened door and the top of the box is great enough to prevent the knob from touching the top of the box and is no more than 65 degrees.

3.2.2 Arch board. Arch board file shall be in accordance with Figure 2. Arch board file shall consist of a zinc-plated steel base and a zinc-plated steel arch wire. Base shall be constructed from 0.036 inch (No. 20 Manufacturers' Standard Gauge) steel sheet (see 3.1). The arch for the arch board file shall be constructed from a 0.148 inch (No. 9 United States Steel Wire Gauge). The arches shall be 2-3/4 inches apart and shall be suitable for filing prescriptions. The base shall have a hole for hanging the file and a tab for pulling file from the box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

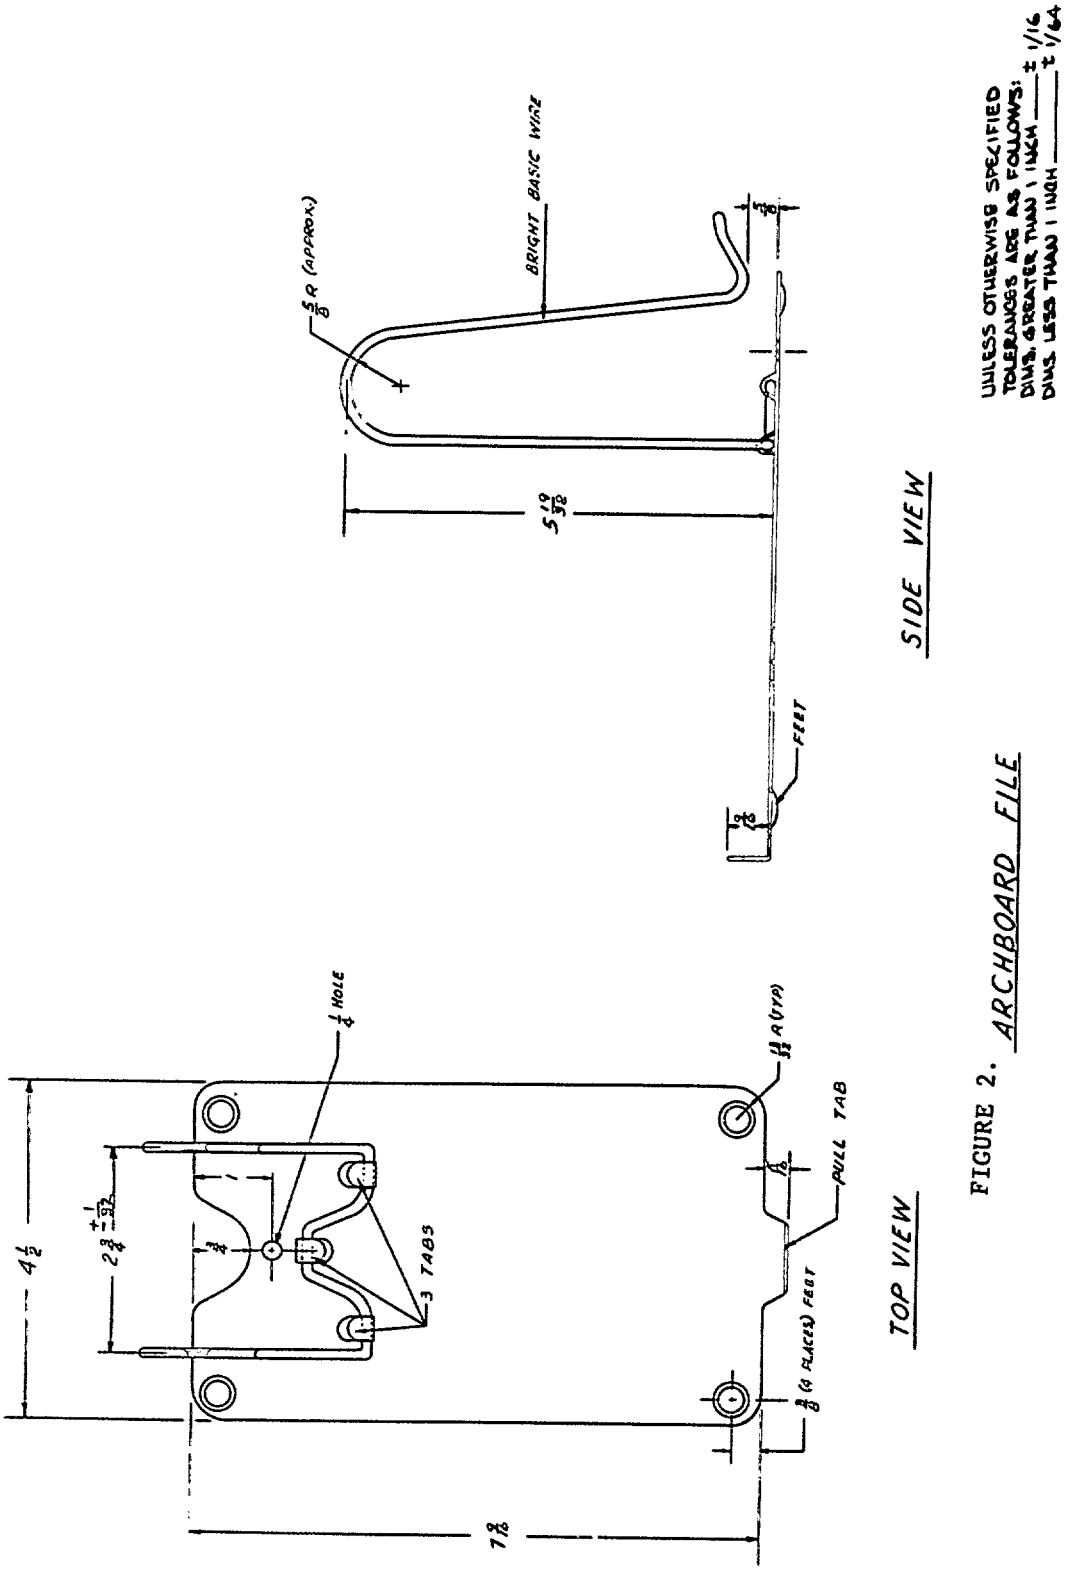


FIGURE 2. ARCHBOARD FILE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19
Check the source to verify that this is the current version before u

3.2.3 Dividers. Dividers shall be fabricated from manila paper which has a basis weight of 148 ± 5 pounds (lbs.) (22-1/2 by 28-1/2 - 1000). Nominal dimensions of the dividers shall be as follows: 5-1/2 inches long, 4-1/2 inches wide and .0072 inches thick. Near one end of each divider, there shall be two holes which are a nominal 2-3/4 inches apart and mate with the arch on the arch board.

3.2.4 Pressboard sheet. Nominal dimensions of the pressboard sheet shall be as follows: 5-1/2 inches long, 4-1/2 inches wide and .025 inches thick. Pressboard sheet shall provide spaces to indicate the number of prescriptions and date. Near one end of the pressboard sheet there shall be two holes which are a nominal 2-3/4 inches apart and which mate with the arch on the arch board. The background color of the pressboard sheet shall be in contrasting color to the marking specified in 3.3.

3.2.5 Pressure-sensitive label. Nominal dimensions of the pressure-sensitive label shall be as follows: 4-5/8 inches long and 3-7/8 inches wide. When tested as specified in 4.4.1, labels shall adhere instantly and remain so firmly affixed that they cannot be removed without tearing. Marked surface of label shall be lacquered. The background color for the label shall be white or ivory, and shall be in contrasting color to the marking specified in 3.3.

3.3 Marking on labels and pressboard sheet. The adhesive label and pressboard sheet shall be marked to include the following legend:

PRESCRIPTIONS

No. _____
TO

No. _____

DATE _____

TO _____

3.4 Closure of box. The door of the box shall not open when tested as specified in 4.4.2.

3.5 Finish on box. The box shall have a high gloss and baked-on white enamel finish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. Workmanship shall be first class throughout. The arch board file and box shall be free from defects which detract from their appearance or may impair their serviceability. All components shall be compatible. Dividers, pressboard sheet and arch board file shall be so constructed that the inserted dividers and pressboard sheet are symmetrical with each other and the arch board file. The metal components shall be free of runs, wrinkles and grit. The arch board file and box shall be free of dirt, oil and grease.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and Table I. Unit of product for examination purposes shall be the arch board file and box.

TABLE I. For examination

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	1.0
Minor defects	II	2.5
For dimensional examination	S-1	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

4.2.2 Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and Table II. The acceptance number shall be zero for all sample sizes. Unit of product for test purposes shall be the arch board file and box or pressure sensitive label as applicable.

TABLE II. For tests

Characteristic	Component	Requirement	Test procedure	Inspection level
Adhesion	Pressure-sensitive label	3.2.5	4.4.1	S-2
Security of closure	File and box	3.4	4.4.2	S-2

4.3 Examination. The arch board file and box shall be examined for defects including, but not limited to, those listed in Table III.

TABLE III. Classification of defects

Categories	Defects
Major	
101	Component part missing, bent, torn or otherwise unusable.
102	Any exposed edge or surface not free of burrs or sharpness.
103	Component does not fit properly.
104	Weld not secure.
105	Enamel coat not smooth, not continuous, not uniform, not free of runs and wrinkles and not free of grit.
Minor	
201	Finish not free of scratches and rough grind marks.
202	Unit not clean; not free of dirt, oil and grease.

4.3.2 Dimensional examination. Arch board file and box shall be examined for defects in dimensions, including angles. Any dimensions not within specified limits shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Adhesion test. The backing shall be removed from a pressure-sensitive label. The label shall then be applied evenly and firmly on an enameled steel surface that is representative of the door of the box that is being supplied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

4.4.2 Security of closure. An arch board file shall be inserted in the box, and the door of the box shall then be in a closed position. The closed box shall be set in a horizontal position and then turned quickly to a vertical position with the door facing down.

4.4.3 Packaging inspection. The inspection of the unit, intermediate package, packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be Level A or C as specified (see 6.1).

5.1.1 Unit of issue. One arch board file and box, as specified, constitutes one unit of issue.

5.1.2 Level A.

5.1.2.1 Unit package. The nine dividers, one gummed label and one pressboard sheet shall be assembled on the arch board file. The assembled arch board file along with one pressure-sensitive label shall be inserted into the metal file box. The knob may be removed from the hinged door and the knob and knob screw, if removed, shall be packaged in an envelope of appropriate size. The envelope shall be sealed and placed within the file box. The file box shall be closed and packaged in a box of appropriate size and constructed in accordance with PPP-B-636, class domestic. Closure shall be adequate to prevent accidental opening.

5.1.3 Level C. Unit shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5. 5.2 Packing. Packing shall be Level A, B or C as specified (see 6.1).

5.1.1 Level A. Twelve units of issue shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2, or PPP-B-636, class weather-resistant, grade V3c.

5.2.1.1 Case liner. Each Level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs thereto. Case liner shall not be required for fiberboard boxs Fiberboard box shall be waterproofed in accordance with app appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Twelve units of issue shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1, or PPP-B-636, type CF, class domestic. Closure of box shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. Units shall be packed in substantial commercial container of the type, size and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit package. Each unit package shall be marked in accordance with MIL-STD-129. Contract or purchase order number shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. National Stock Number (NSN).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2 This specification does not cover all types, classes, grades or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the type normally procured to meet military requirements.

6.3 This specification covers the following item listed in the Federal Supply Catalog:

National Stock No.	Item Identification
7520-00-935-0998	ARCH BOARD FILE AND BOX, PRESCRIPTION FILING, Metal, 9-7/16 by 5-5/16 by 6-3/16 inches

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

Custodians:
Army - GL
Navy - SA
Air Force - 99

Preparing Activity:
DSA-DM

Project No. 7520-0160

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-A-37270 ARCH BOARD FILE AND BOX

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

☆ GPO: 1974— 603-680/6126 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.