MILITARY SPECIFICATION

CAPS, OPERATING, SURGICAL, WOMAN'S, ADJUSTABLE, DISPOSABLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and two sizes of a disposable, adjustable, woman's, surgical, operating cap.

1.2 Classification. The operating caps shall be furnished in the following sizes, as specified (see 6.2):

Size	Overall Diameter
1	12 inches
2	10 inches

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton
PPP-B-636	-	Boxes, Shipping, Fiberboard

STANDARDS

FEDERAL

FED-TEST METHOD STD NO. 191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL FIRE PROTECTION ASSOCIATION

56A	-	Inhalation Anesthetics
702	-	Flammability of Wearing Apparel

(Application for copies should be addressed to the National Fire Protection Association (NFPA), 470 Atlantic Avenue, Boston, Massachusetts 02210.)

Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

3. REQUIREMENTS

3.1 Materials and components. The materials and components shall conform to the applicable specifications and standards as listed or required herein.

3.1.1 Cap fabric. The cap shall be fabricated from nonwoven fabric consisting of 100 percent rayon with an acrylic latex binder and with a fire retardant treatment. The material shall be of quality to withstand sterilization by steam without impairing the serviceability of the cap. Bacteriostatic agents, if nontoxic and harmless in the concentration employed, may be added. The finished nonwoven fabric shall be non-irritating and non-toxic when inspected as specified in 4.3.1.3. The fabric shall be non-pilling, free of lint and objectionable odor when wet or dry and noiseless. When inspected as specified in 4.3.1 through 4.3.1.2, the cap fabric shall conform to the requirements of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

TABLE I. Cap fabric properties.

Characteristics	Requirements
Staple length, inches	1-9/16
Staple denier, nominal	1-1/2
Grams per square yard, minimum	13
Breaking strength, pounds:	
Machine direction	3.4
Cross direction	0.35
Bursting strength, pounds minimum:	
Dry	4.0
Wet	2.0
Antistatic properties, maximum:	
Surface resistivity, ohms per unit square	1×10^{11}
OR	
Static decay, seconds	0.5
Flame resistance, seconds minimum	3.0
Color	Light shades of blue, green or grey; and may include a pattern of small white stripes or flecks

3.1.2 Elastic band. The elastic band shall be one round, white strand of extruded rubber covered with white cotton yarns. When inspected as specified in 4.3.2 through 4.3.2.2, the elastic band shall have a minimum elongation of 210 percent.

3.1.3 Thread. All the sewing operations shall be performed with the cotton thread conforming to V-T-276, type 1A1, or 1A2, Ticket Number 40, 50 or 60, 3 ply or Ticket Number 70, 2 ply. The color of the thread shall be natural (unbleached) or bleached.

3.1.4 Metal fastener. The metal fastener shall be fabricated from non-corrosive, anti-spark metal. The size and kind of the metal shall be suitable for the purpose intended (see 3.3.2.1, 3.3.2.2 and 4.3.3).

3.2 Design. The cap shall be of one piece construction, circular in shape with an elastic band around the circumference to hold the cap on the wearer's head.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

3.3 Construction.

3.3.1 Seams and stitching. The stitch type used in the construction of the caps shall conform to FED-STD-751. The overedge stitching shall be Stitch Type 503, 504, 505 or a combination of 101 and 102. The bight of the overedge stitching shall be 1/8 to 1/4 inch from the edge of the fabric. All regular sewing shall be performed with Stitch Type 301. All sewing shall be accomplished with a minimum of 6 stitches per inch. The seam allowance may be on the inner or outerside of the cap. Each thread break, skip, and run-off shall be overstitched not less than 1/2 inch. Skipped stitches or thread breaks may be repaired using Stitch Type 301. The thread tension shall be maintained so that there shall not be any loose or tight stitching and the lock shall be embedded in the materials sewn together. All thread ends shall be trimmed to a maximum length of one inch.

3.3.2 Construction details. The cap shall be constructed circular in shape from a circular, rectangular or square piece of the nonwoven fabric, as applicable. The edge to which the elastic is to be attached shall be folded approximately 1/2 inch. The elastic band shall be attached with overedge stitching (see 3.3.1) and the shirrings or gatherings shall be uniform. The elastic band shall be cut in such a manner that when it is in a relaxed position the head opening shall comply with the dimension specified in 3.3.2.1 and 3.3.2.2 for the applicable size cap.

3.3.2.1 Size 1, 12 inches overall diameter. The size of the fabric for the size 1 cap shall be a minimum of 24 inches in diameter. The elastic band shall be attached to the periphery as specified in 3.3.2. As an alternate, the size of the fabric shall be 19 $\pm$ 1/2 inches wide by 21 $\pm$ 1/2 inches long. The elastic band shall be attached to each 21 inch edge as specified in 3.3.2. Each 19 inch edge shall be gathered uniformly and securely clinched, 3/8 $\pm$ 1/8 inch from the end, by a centered metal fastener or by tacking with the cotton thread. The relaxed head opening shall be 6-1/2 $\pm$ 1/2 inches. The overall diameter shall be approximately 12 inches.

3.3.2.2 Size 2, 10 inches overall diameter. The size of the fabric for the size 2 cap shall be a minimum of 19 inches in diameter. The elastic band shall be attached to the periphery as specified in 3.3.2. As an alternate, the size of the fabric shall be 19 $\pm$ 1/2 inches square. The elastic band shall be attached to two opposite sides. The two remaining sides shall each be gathered uniformly and secured as specified in 3.3.2.1. The relaxed head opening shall be 6-1/2 $\pm$ 1/2 inches. The overall diameter shall be approximately 10 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

3.4 Workmanship. The caps shall not contain any spot, stain, hole, abraded area, tear, cut, mend, scorch or needle chew. The fasteners shall be clinched without distortion, damage, splitting or cutting of the fabric. The fasteners shall not be malformed, misaligned, fractured, broken or distorted nor contain any corrosion, scale, pit, dent, crack, burr, sliver or sharp edge. The caps shall conform to the quality of grade established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material and component inspection. In accordance with 4.1, the materials and components shall be inspected and tested in accordance with all the requirements of the referenced specifications and standards, unless otherwise excluded, amended, modified, or qualified in this specification or purchase document.

4.1.2 Certificate of quality. When certificates of quality are submitted in accordance with table II, they shall contain verifiable actual test and inspection data. The Government reserves the right to inspect and test the components to verify the validity of the certification.

4.1.3 Inspection. Inspection, as used in this specification, is defined as both examination (an investigation without the use of special laboratory apparatus or procedures such as visual) and testing (a determination by technical means of the physical and chemical properties) of the item.

4.2 Quality conformance inspection. The sampling and inspection shall conform to MIL-STD-105, except where otherwise indicated hereinafter. The quality conformance inspection shall consist of the tests and examinations specified in table II.

4.2.1 Sampling.

Source: https://assist.dla.mil -- Downloaded: 202640-21T10:19Z
Check the source to verify that this is the currentversion before use.

4.2.1.1 Inspection lot.

4.2.1.1.1 Cap fabric. An inspection lot size shall be expressed in units of one linear yard of the cap fabric and shall consist of all the cap fabric received by the cap manufacturer at one time. The sample unit for inspection shall be one linear yard.

4.2.1.1.2 Elastic band. An inspection lot size shall be expressed in units of one linear yard of the elastic band and shall consist of all the elastic band received by the cap manufacturer at one time. The sample unit for inspection shall be one linear yard.

4.2.1.1.3 Metal fasteners. An inspection lot shall be expressed in units of one metal fastener and shall consist of all the metal fasteners received by the cap manufacturer at one time. The sample unit for inspection shall be one metal fastener.

4.2.1.1.4 Caps. An inspection lot size shall be expressed in units of one cap made essentially under the same conditions and from the same materials and components. The sample unit for inspection shall be one cap.

4.2.1.2 Sampling for tests and examinations of the cap fabric, elastic band, metal fasteners and caps. The sample size, acceptance criteria, tests and examinations required for the cap fabric, elastic band, metal fasteners or caps, as applicable, shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 202640-21T10:19Z
Check the source to verify that this is the currentversion before use.

TABLE II. Sample size, acceptance criteria, tests and examinations required for the cap fabric, elastic band, metal fasteners and caps.

Item	Inspection	Paragraph Requirement	Paragraph Method	Sample size	Acceptance criteria	
Cap fabric 1/	Staple length	3.1.1	4.3.1.1	2/	2/	4/
	Staple denier	3.1.1	4.3.1.1	2/	2/	4/
	Material	3.1.1	4.3.1.1	2/	2/	4/
	Weight	3.1.1	4.3.1	2/	2/	4/
	Breaking strength	3.1.1	4.3.1	2/	2/	4/
	Bursting strength	3.1.1	4.3.1	2/	2/	4/
	Anti-static properties	3.1.1	4.3.1.2	2/	2/	4/
	Flame resistance	3.1.1	4.3.1.2	2/	2/	4/
	Color	3.1.1	4.3.1.1	2/	2/	4/
	Toxicity	3.1.1	4.3.1.3	2/	2/	4/
Elastic band 1/	Color	3.1.2	4.3.2.1	2/	2/	4/
	Shape	3.1.2	4.3.2.1	2/	2/	4/
	Material of the core	3.1.2	4.3.2.1	2/	2/	4/
	Material of the covering yarn	3.1.2	4.3.2.1	2/	2/	4/
	Elongation	3.1.2	4.3.2.2	2/	2/	4/
Metal fastener 1/	Non-corrosive	3.1.4	4.3.3	3/	3/	4/
	Anti-spark	3.1.4	4.3.3	3/	3/	4/
Caps	Visual examination	3.2 through 3.4	4.3.4.1.1	Inspection Level II	An acceptable quality level of 4.0 defects per 100 units for major defects and 10.0 defects per 100 units for minor defects	

1/ The inspection of the cap fabric, elastic band, and the metal fastener, as applicable, shall be conducted either at the contractor's or subcontractor's plant.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

2/ The sampling for the testing of the cap fabric and the elastic band shall be in accordance with 4.2.1.1.1 and 4.2.1.1.2, as applicable, and as follows:

Lot size (yards)	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The samples shall be taken from the beginning of each roll. The lot shall be unacceptable if one or more sample units fail to meet any of the requirements specified in table II. Each sample unit taken for inspection shall be used to determine all the characteristics of the cap fabric or the elastic band, as applicable, specified in table II.

3/ The sampling for the testing of the metal fasteners shall be in accordance with 4.2.1.1.3 and as follows:

Lot size (Number of metal fasteners)	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more of the sample units fail to meet the non-corrosive or anti-spark requirement, as applicable.

4/ A certificate of quality may be submitted for the stated requirement (see 4.1.2).

4.3 Inspection methods.

4.3.1 Cap fabric. The characteristics of the cap fabric shall be determined in accordance with the inspection methods of FED-TEST METHOD STD NO. 191 specified in table III and 4.3.1.1 through 4.3.1.3.

TABLE III. Cap fabric properties.

Characteristic	FED-TEST METHOD STD NO. 191
Weight	5041
Breaking strength	5102
Bursting strength:	
Dry	5122
Wet 1/	5122

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

1/ Prior to determining the wet bursting strength, each specimen shall be immersed in distilled water having a temperature of 70 to 80 degrees Fahrenheit (21.1 to 26.7 degrees Centigrade) for 10 minutes. Upon the expiration of 10 minutes, remove the specimen and lay it flat and straight on a pad of blotting paper. The specimen shall be covered with a sheet of blotting paper and a 500 gram cylinder shall be rolled once over the covered specimen taking about one second to complete the rolling. The specimen shall then be tested as specified in table III for wet bursting strength.

4.3.1.1 Staple length, staple denier, material and color. The staple length, staple denier and material shall be determined by any standard commercial method. The color shall be determined visually.

4.3.1.2 Antistatic properties and flame resistance. The antistatic properties and flame resistance shall be determined in accordance with the inspection methods of NFPA specified as follows:

Characteristic	NFPA inspection method
Antistatic properties	56A 1/
Flame resistance	702

1/ The apparatus used to determine the surface resistivity shall conform to figure 1 and shall weigh 300 ± 25 grams. The test plate, upon which the test specimen shall be placed, shall be Teflon a minimum of 1/4 inch thick and one foot square. The test plate surface shall be clean, flat and smooth and free from dents, pits, scratches and any foreign matter.

4.3.1.3 Toxicity. The toxicity and irritability of the fabric shall be determined by any standard method. The test method used shall be approved by the contracting officer. A certificate of quality may be submitted for the non-toxic and non-irritating properties (see 4.1.2). Certification in lieu of testing is acceptable provided that the contractor certifies in writing that the raw materials and processing are identical to those used on fabrics previously tested and found acceptable.

4.3.2 Elastic band. The characteristics of the elastic band shall be determined in accordance with 4.3.2.1 and 4.3.2.2.

4.3.2.1 Color, shape and material of the core and covering yarn. The color and shape of the rubber core shall be determined visually. The material of the core and covering yarn shall be determined by any standard commercial method. As an alternate, the material of the covering yarn may be determined in accordance with FED-TEST METHOD STD NO. 191, Method 1200.

4.3.2.2 Elongation. A piece of the elastic band, not less than 14 inches in length shall be laid on a flat horizontal surface under slight tension to straighten without stretching. A ten inch portion of the elastic band shall be marked off. The elastic band shall be stretched and the distance between the two marks shall be constantly measured, using a graduated scale, during the stretching. An approved type of breaking strength and elongation testing machine as described in FED-TEST METHOD STD NO. 191 may be used in

Source: https://assist.dla.mil -- Downloaded: 202640-21T10:19Z
Check the source to verify that this is the current version before use.

stretching the elastic band. The distance between the marks shall be obtained at the breaking point of the elastic, band. The speed of the movable jaw under no load shall be 12 ± 1/2 inches per minute. The elongation shall be computed as follows:

$$\text{Elongation, percent} = \frac{L_2 - L_1}{L_1} \times 100$$

L_1 = Original length before stretching of the marked off portion.

L_2 = Stretched length of the marked off portion at its breaking point.

As an alternate, FED-TEST METHOD STD NO. 191, Inspection Method 4102 may be used to determine the elongation.

4.3.3 Metal fastener. The non-corrosiveness and anti-sparking properties of the metal fasteners shall be determined by any standard commercial method.

4.3.4 Caps.

4.3.4.1 Visual examination.

4.3.4.1.1 Caps. Each cap selected in accordance with table II as a sample unit from the lot shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. The classification of defects, table VI, shall be used to classify the defects found.

TABLE IV. Classification of defects for the visual examination of the assembled caps.

Defect	Major	Minor
a. Any hole, scissors or knife cut, tear, mend, split, burn, needle chew, abraded area, or any other weakening defect	X	
b. Any portion of the cap stiffened or scorched by any process of manufacturing	X	
c. Color of any component not as specified or not uniform		X
d. Any thread end not trimmed to a maximum length of one inch; one or more thread scraps not removed; or any pilling or lint		X
e. Any spot or stain on the outerside of any cap		X
f. Any dimension not as specified	1/	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects for the visual examination of the assembled caps. - Continued

Defect	Major	Minor
g. Any thread break, skip or run-off not overstitched	X	
h. Any thread break, skip or run-off overstitched for less than 1/2 inch	1/	
i. Stitch type not as specified	1/	
j. Any loose stitching 2/	1/	
k. Any tight stitching, resulting in the breakage of the stitches when normal pull is applied 3/	X	
l. One or more stitches per inch less than the minimum specified	X	
m. Any open seam 4/	X	
n. Metal fasteners:		
1. Any surface rough or containing any crack, nick, burr, sharp, edge, dent or sliver	X	
2. Any surface unclean or contains embedded foreign matter		X
3. Any malformed, misaligned, corroded, fractured, broken, chipped, bent or distorted	X	
4. Any missing, loose, improperly finished, or improperly clinched resulting in cutting of the fabric	X	
o. Any component not as specified or any defect of component or defect of assembly, not herein classsifed	1/	
p. Any component, component part, or required operation omitted, or any operation improperly performed, not herein classified	1/	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

1/ The defect shall be classified and scored as a major defect, when it seriously affects the serviceability or appearance, otherwise it shall be classified and scored as a minor defect.

2/ A seam shall be classified and scored as loose when the top and bobbin threads are on the same surface.

3/ Puckering is evidence of tight tension or gathering of the material. When puckering is evident and is not caused by the gathering of the material, the stitching shall be inspected for tight tenison and breaking of stitches by exerting normal pull in lengthwise direction of the stitching, by pulling the material taut to straighten out the seam.

4/ A seam shall be classified and scored as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur.

4.3.4.1.2 Examination of preparation for delivery. An examination shall be made to determine whether the packaging, packing, and marking comply with the requirements of section 5. Defects shall be scored as specified in table V. Sampling shall be in accordance with MIL-STD-105. The sample unit shall be one container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The Inspection Level shall be S-2 and the acceptable quality level shall be 4.0 defects per hundred units.

TABLE V. Examination of preparation for delivery.

Examination	Defect
Containers	Not as specified.
Quantity	Quantity in interior packages and shipping containers not as specified.
Packaging and packing materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, tape improperly applied, or containers distorted.
Markings	Omitted, incorrect, illegible, improper size, location, sequence, or method of application.

4.3.5.1 Examination of closure and reinforcement for containers. When shipping containers are required to comply with PPP-B-636, examination for defects in closure and reinforcement shall be in accordance with the appendix to that specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. One package containing five hundred (500) caps of size 1 or one package containing one thousand (1000) caps of size 2 as specified, constitutes one unit of issue.

5.1.1.1 Level A.

5.1.1.1.1 Unit packaging. Each unit of issue of the size specified, shall be neatly stacked and packaged in a plastic bag. Excess air shall be expelled from the bag, and the bag heat sealed.

5.1.1.2 Level C. Each unit of issue shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Each unit of issue shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-636, class weather resistant, grade V3c. Closure, waterproofing and strapping shall be as specified in the appendix of PPP-B-636.

5.2.2 Level B. Each unit of issue shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-636, type CF, class domestic. Closure shall be as specified in the appendix of PPP-B-636.

5.2.3 Level C. Units of issue shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit package. Each unit package shall be marked with the item identification, national stock number, name and address of the manufacturer, contract or purchase order number and date of manufacture.

Source: https://assist.dla.mil -- Downloaded: 202610-21T10:19Z
Check the source to verify that this is the currentversion before use.

5.3.2 Exterior container. Each exterior container shall be marked as specified in MIL-STD-129. Date of manufacture shall be shown in lieu of date packed.

6. NOTES

6.1 Intended use. The disposable, adjustable, woman's, surgical, operating caps covered by this specification are intended for one time use by female surgical team members. The size 1 cap is intended for wear by women with bouffant hair styles. The size 2 cap is intended to be worn by women without bouffant hair styles.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Quantity and size desired.
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Catalog information. This specification is intended to cover the following items appearing in the Federal Supply Catalog:


National Stock No.	Item Identification	Size
6532-00-250-5041	CAP, OPERATING, SURGICAL, Woman's, Adjustable, Disposable, 500s	1
6532-00-250-5042	CAP, OPERATING, SURGICAL, Woman's, Adjustable, Disposable, 1000s	2

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
DSA-DM

Project No. 6532-1103

Source: https://assist.dla.mil -- Downloaded: 202610-21T10:19Z
Check the source to verify that this is the current version before use.

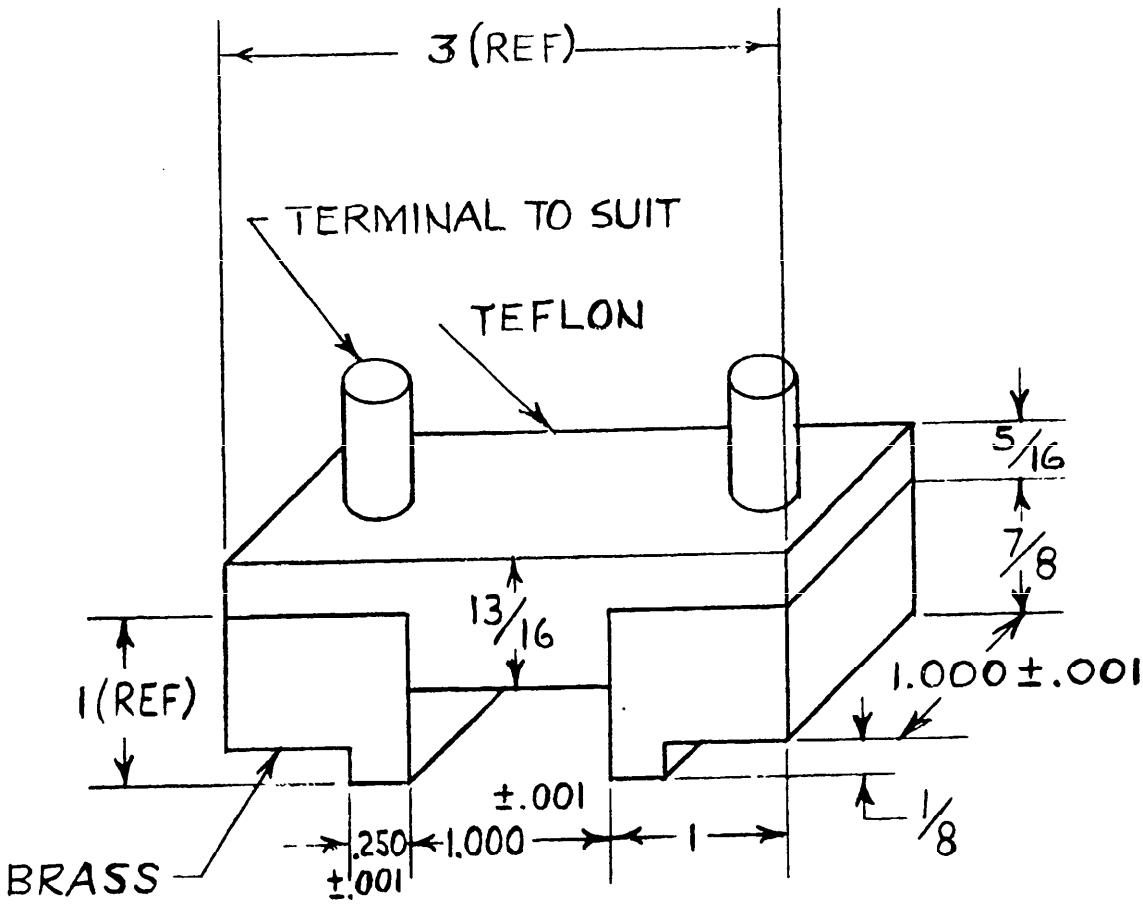

FRACTIONAL DIMENSIONS NOT CRITICAL
WITHIN OVERALL WEIGHT REQUIREMENTS

FIGURE 1. Surface resistivity apparatus

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-C-37268 CAPS, OPERATING, SURGICAL, WOMAN"S, ADJUST., DISP.

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-21T10:19Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, PA 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:19Z
Check the source to verify that this is the current version before use.