METRIC
A-A-59580
8 February 2001
SUPERSEDING
MIL-L-14519C
22 June 1978

COMMERCIAL ITEM DESCRIPTION

LIMESTONE, PULVERIZED

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers one grade of pulverized limestone. The pulverized limestone shall be intended for use as a coagulant aid in military water purification equipment.

2. CLASSIFICATION. The pulverized limestone shall be of the following sizes as specified in the acquisition order (see 7.4):

Size: A - 50 lbs
B - 100 lbs
C - bulk

3. SALIENT CHARACTERISTICS

3.1 Chemical composition. When tested in accordance with American Society for Testing and Materials (ASTM) C 25, "Standard Test Methods for Chemical Analysis of Limestone, Quicklime, and Hydrated Lime" (DoD adopted), the pulverized limestone shall conform to table I.

3.2 Deleterious ingredients. Pulverized limestone shall meet or exceed the requirements for deleterious ingredients listed in NSF International (NSF) Standard 60, "Drinking Water Treatment Chemicals - Health Effects" (DoD adopted).

3.3 Particle size. Test in accordance with FED-STD-536, Method 2101, "Soap and Soap-Products (Including Synthetic Detergents); Sampling and Testing", except that the sieves shall conform to ASTM E 11, "Standard Specification for Wire Cloth and Sieves for Testing

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 6810

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Purposes" (DoD adopted). Not less than 90 percent of the pulverized limestone shall pass through a 150 micron (µm) (No. 100) sieve and not more than 35 percent shall pass through a 45 µm (No. 325) sieve.

TABLE I. Chemical composition.

Requirement	Percent by weight	
	Maximum	Minimum
Silica (silicon dioxide, SiO_2)	1.0	---
Iron and aluminum oxides (Fe_2O_3 plus Al_2O_3)	0.6	---
Calcium carbonate ($CaCO_3$) (determine as calcium oxide (CaO))	---	94.0
Magnesium carbonate ($MgCO_3$)	1.43	---

4. REGULATORY REQUIREMENTS

4.1 Packaging, marking, and labeling. Material shall be labeled, packed, and marked in accordance with Title 49 Code of Federal Regulations (CFR), Parts 100 to 185.

4.2 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practical, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.3 Material safety data sheet (MSDS). Manufacturers shall prepare and submit a MSDS in accordance with FED-STD-313, "Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities", and meeting the requirements of 29 CFR 1910.1200, "Occupational Safety and Health Standards: Hazard Communication".

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The product provided shall meet the salient characteristics of this commercial item description, conform to the producer’s own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The item offered must have been sold to the government or commercial market.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order (see 7.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

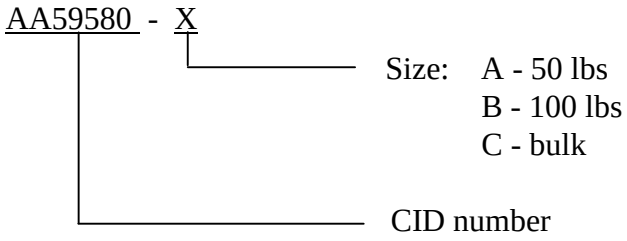

7.2 Source of documents.

7.2.1 Government documents. Copies of CFR, FAR, and federal standards may be obtained from the U.S. Government Printing Office, Superintendent of Documents, Mail Stop: SSOP, Washington, DC 20402-0001. Electronic copies of CFR documents may be obtained from http://www.access.gpo.gov. Electronic copies of federal standards may be obtained from http://astimage.daps.dla.mil/quicksearch/.

7.2.2 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.2.3 NSF standards. Copies of NSF International standards may be obtained from the NSF International, P.O. Box 130140, Ann Arbor, MI 48113-0140.

7.3 National stock number (NSN). The following is a list of NSNs which correspond to this CID. These may not be indicative of all possible NSNs associated with this document.

Size	Assigned NSN
100 lbs	6810-00-585-2017
50 lbs	6810-00-618-4891

7.4 Ordering data. Acquisition documents must specify the following:

a. CID document number, revision, CID PIN.
b. Size and quantity required (see 2).
c. Packaging requirements (see 6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

7.5 Sources of supply. The manufacturers and/or suppliers listed below are known to supply products that meet the salient characteristics requirements of this document. Competition is not limited to the listed firms.

Global Stone James River
2620 Main Street
P.O. Box 617
Buchanan, VA 24066
(800) 365-6648

J.M. Huber Corporation
3150 Gardner Expressway
Quincy, IL 62301
(217) 224-1140

Greer Lime Company
P.O. Box 302
Riverton, WV 26814
(800) 344-5133

Mississippi Lime Company
7 Alby Street
P.O. Box 2247
Alton, IL 62002
(800) 437-5463

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 68

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:
DLA - GS3

(Project 6810-1640)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.