MILITARY SPECIFICATION

HOOK, CASE, STUDDED PLATE

1. SCOPE

1.1 This specification covers a studded-plate case hook.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-601	- Boxes, Wood, Cleated-Plywood.

Military

MIL-P-116	- Preservation, Methods of.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of U. S. Military Property.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:27Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

A576 - Special Quality Hot-Rolled Carbon Steel Bars.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification.

(Application for copies should be addressed to the Tariff Publishing Officer, Room 202, Union Station,516 West Jackson Boulevard, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street NW, Washington, D. C. 20036.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS

Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, N. Y. 10017.)

AMERICAN WELDING SOCIETY

B3.0 - Standard Qualification Procedure.

(Application for copies should be addressed to the American Welding Society, 345 East 47th Street, New York, N. Y. 10017.)

3. REQUIREMENTS

3.1 Description. The hook shall be as shown in figure 1 and as specified herein.

3.2 First article.

3.2.1 Preproduction model. The supplier shall furnish a hook for for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:27Z
Check the source to verify that this is the current version before use.

design detail will produce hooks that comply with the requirements of this specification. Examination and tests shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein. Material not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.3.1 Steel. Steel shall conform to ASTM A576, grade 1035. Minimum tensile strength shall be 98,000 pounds per square inch.

3.4 Fabrication. The legs shall be forged from a steel bar. A steel plate with studs forged on each corner shall be welded to the legs.

3.5 Capacities. A pair of hooks shall have a safe working load of 5,000 pounds and a proof load of 10,000 pounds.

3.6 Identification marking. The hook shall be identified in accordance with MIL-STD-130.

3.7 Workmanship. The hook shall be clean and free from sand, dirt, fins, pits, scale, and other harmful extraneous material.

3.7.1 Welders and welding.

3.7.1.1 Welders. Before assigning any welder to manual welding work covered by this specification, the supplier shall provide the contracting officer with certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the type of welding operation to be performed and that such qualification is effective as defined by the particular code:

Standard Qualification Procedure of the American Welding Society.
Welding Qualifications of the ASME.

3.7.1.2 Welding. Welds shall be free from defects such as excessive porosity, entrapped slag, overlap, undercut, incomplete fusion, and cracks which may affect the serviceability of hooks.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:27Z
Check the source to verify that this is the current version before use.

as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction hook shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The preproduction hook shall be tested as specified in 4.5.2.1. Failure of the test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105.

4.4.2 Examination.

4.4.2.1 Individual. Each hook shall be examined for the critical defect specified in 4.5.1. Presence of a critical defect shall be cause for rejection.

4.4.2.2 Samples. Samples selected in accordance with 4.4.1 shall be examined for the major defects specified in 4.5.1. AQL shall be 1.5 percent defective.

4.4.3 Test. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2. AQL shall be 4.0 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. Hooks shall be examined as specified for the following defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:27Z
Check the source to verify that this is the current version before use.

Critical

1. Cracks in forging.

Major

101. Dimensions not as shown in figure 1.
102. Welding not as specified.
103. Studs not case hardened.
104. Edges not ground as specified.
105. Forging defects impairing strength or function such as fins, nicks, flaws, and seams.
106. Identification marking missing or illegible.
107. Extraneous matter on hook.

4.5.2 Test.

4.5.2.1 Proof load. Hooks shall be tested in pairs. Capacity test shall be made by raising a wood case with a gross weight of 10,000 pounds. A sling shall pass through the eye of each sling hook with each end loop of the sling attached to the hoisting hook. The eyes of the case hooks shall be free to slide on the sling. Sling legs shall assume an angle of between 40 and 45 degrees with the vertical. A vertical hoisting force shall be applied to the sling and the pair of hooks shall be raised with proof load until the load is free of any support. The load shall be held suspended for 1 minute. Nonconformance to 3.5 shall constitute failure of this test.

4.6 Inspection of preparation for delivery.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 4.0 percent defective.

108. Materials or containers not as specified. Each incorrect material or container shall constitute one defect.
109. Hooks not protected as specified by use of preservative.
110. Skids not provided for boxes with a gross weight exceeding 250 pounds.
111. Marking illegible, incorrect, incomplete, or missing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:27Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation. Hooks shall be preserved level A or C, as specified.

5.1.1 Level A. Each hook shall be cleaned, dried and preserved in accordance with MIL-P-116, method I, by applying type P-1 preservative.

5.1.2 Level C. Hooks shall be preserved to afford protection against deterioration and damage during shipment from the supplier to the initial destination.

5.2 Packing. Packing shall be level A, B, or C, as specified.

5.2.1 Level A. The hooks preserved as specified in 5.1 shall be packed in close-fitting boxes conforming to PPP-B-601, overseas type, style optional. Strapping shall be zinc coated. Contents shall be blocked, braced, and cushioned as required to prevent damage to shipping container.

5.2.2 Level B. Hooks shall be packed as specified in 5.2.1 except that boxes shall be domestic type and strapping need not be zinc coated.

5.2.3 Level C. The hooks shall be packed to assure carrier acceptance and safe delivery to destination at lowest rates in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. Shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The case hooks are intended for use, in pairs, for dragging or lifting wooden cases weighing up to 5,000 pounds preparatory to hoisting. These hooks are not intended for hoisting.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of preproduction model (see 3.2.1).
(c) Level of preservation and level of packing required (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:27Z
Check the source to verify that this is the current version before use.

6.3 Preproduction model. Any changes or deviations of production hooks from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish hooks conforming to this specification.

Custodian:

Army - ME

Preparing activity:

Army - ME

Project No. 4030-A015

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:27Z
Check the source to verify that this is the current version before use.

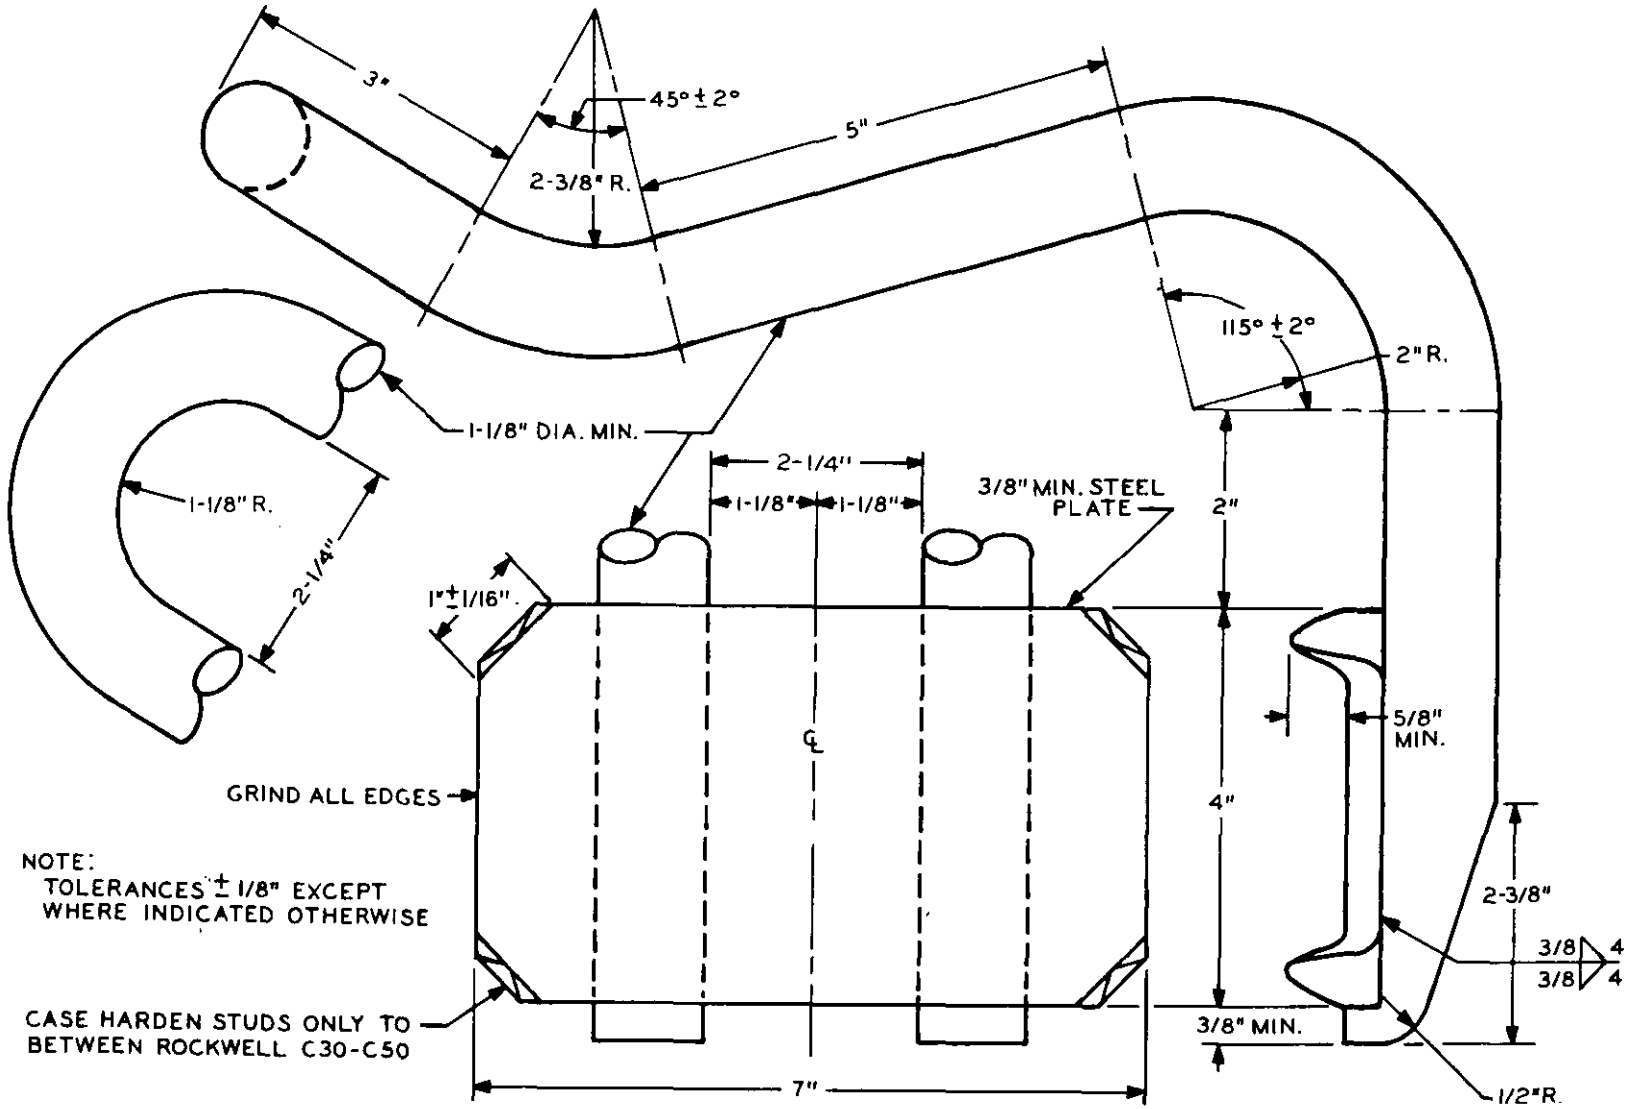


FIGURE 1. STUDDED PLATE, CASE HOOK

X801

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:27Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-H-13367B(ME) Hook, Case, Studded Plate

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:27Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. A. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZG
FORT BELVOIR, VIRGINIA 22060

OFFICIAL BUSINESS

POSTAGE AND FEES PAID

DEPARTMENT OF THE ARMY
U. S. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZG
FORT BELVOIR, VIRGINIA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:27Z
Check the source to verify that this is the current version before use.